




WOOD CONNECTORS



CONTENTS

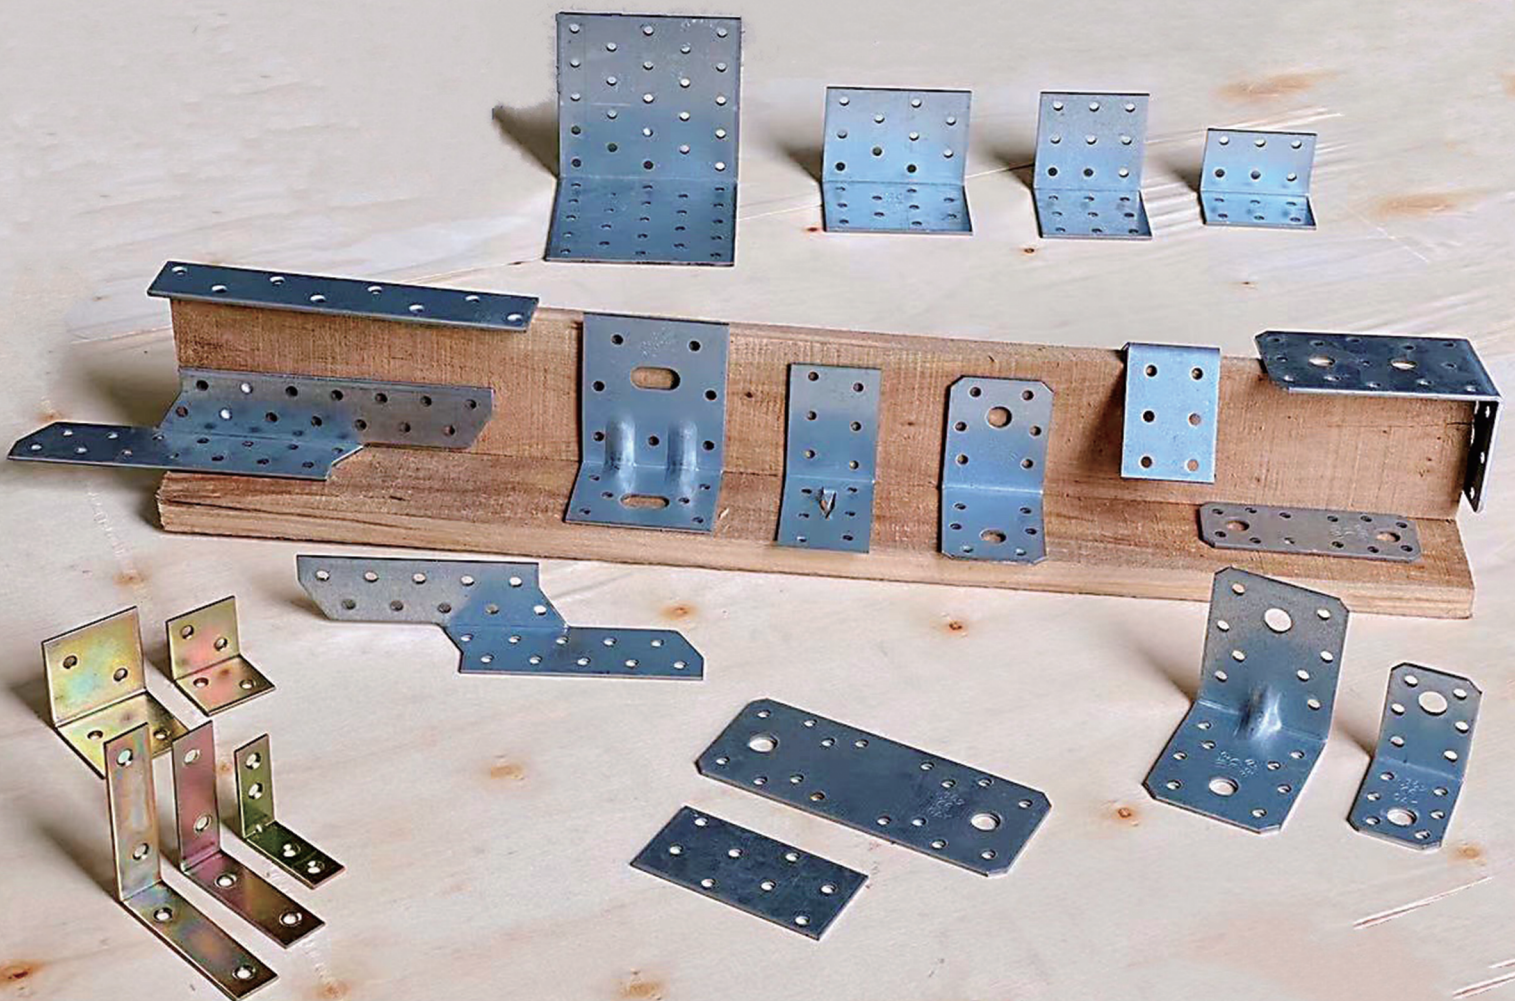

Angle Brackets

Angle bracket	01
Perforated angle bracket	01
Angle bracket with reinforcements	02
Perforated angle bracket	03
Adjustable angle bracket	03
Perforated adjustable angle bracket	04
Anchor angle bracket	04
Concrete angle bracket	04
Narrow angle bracket	05
Rounded angle bracket	05
Construction angle bracket	06
Wide angle bracket	06
Wide rounded angle bracket	06

Beam Clamp

Beam Clamp	07
------------	----

Connector

Flat connector	07
Narrow flat connector	07
Folded connector	08
Rafter connector	08
Thick connector	08
Rounded assembly connector	09
Z-Type connector	09
T-Type connector	09
T-Type Mounting connector	10

Corener plate

Corener plate	10
Decorative corner plate	11

Joist hanger



Joist hanger divided	11
Joist hanger folded	12
Joist hanger light	12
Joist hanger	13

ANGLE BRACKET

Application: Basic angle brackets for joining wood with steel, concrete or wood.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated



Art-Nr.	dimensions[mm]				holes[mm]				weight [g]	pack [pcs]
	a	b	c	≠	ø5	ø7	ø11	ø14		
AB 1-1	50	50	35	2.5	8	—	2	—	62	20
AB 1-2	70	70	55	2.5	20	—	2	—	140	20
AB 1-3	90	90	65	2.5	16	12	2	—	211	20
AB 1-4	100	100	35	2.5	16	—	4	—	124	20
AB 1-5	105	105	90	2.5	36	—	—	2	347	20
AB 1-6	140	140	55	2.5	36	—	4	—	276	20


Art-Nr.	dimensions[mm]				holes[mm]				weight [g]	pack [pcs]
	a	b	c	≠	ø5	ø7	ø11	ø14		
AB 2-1	40	40	20	2.0	7	—	1	—	21	20
AB 2-2	50	50	35	2.5	8	—	2	—	62	20
AB 2-3	70	70	55	2.5	20	—	2	—	138	20
AB 2-4	150	50	35	2.5	16	—	4	—	124	20
AB 2-5	90	90	65	2.5	16	12	2	—	208	20
AB 2-6	105	105	90	2.5	36	—	—	2	349	20
AB 2-6	102	102	35	2.5	16	—	4	—	122	20

PERFORATED ANGLE BRACKET

Application: Basic angle brackets with universal perforation.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]				holes[mm]		weight [g]	pack [pcs]
	a	b	c	≠	ø5	ø7		
PAB-1	40	40	20	2.0	4	—	24	50
PAB-2	40	40	40	2.0	8	—	46	50
PAB-3	40	40	60	2.0	12	—	72	50
PAB-4	60	60	40	2.0	12	—	70	20
PAB-5	60	60	60	2.0	18	—	106	20
PAB-6	60	60	80	2.0	24	—	142	20
PAB-7	60	60	100	2.0	30	—	179	20
PAB-8	80	80	40	2.0	16	—	94	20
PAB-9	80	80	60	2.0	24	—	140	20
PAB-10	80	80	80	2.0	32	—	187	20
PAB-11	80	80	100	2.0	40	—	237	20
PAB-12	100	100	60	2.0	30	—	177	20
PAB-13	100	100	80	2.0	40	—	232	20
PAB-14	100	100	100	2.0	50	—	294	20
PAB-15	40	40	100	2.0	20	—	115	20
PAB-16	40	40	200	2.0	40	—	239	20
PAB-17	90	90	40	2.0	16	—	107	20
PAB-18	50	50	40	2.0	8	—	51	20
PAB-19	60	60	50	2.0	12	—	92	20
PAB-20	120	90	40	3.0	18	—	191	20
PAB-21	60	60	25	2.0	6	—	51	20

ANGLE BRACKET WITH REINFORCEMENTS


Application: Angle brackets with reinforcement have a very high bending strength.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated



Art-Nr.	dimensions[mm]				holes[mm]						weight [g]	pack [pcs]
	a	b	c	≠	ø5	ø7	ø11	ø12	ø14			
ABR 1-1	90	90	65	1.5	16	12	2	—	—		119	20
ABR 1-2	105	105	90	1.5	36	—	—	—	2		207	20
ABR 1-3	90	50	55	1.5	20	—	2	—	—		83	20
ABR 1-4	70	70	55	1.5	20	—	2	—	—		82	20
ABR 1-5	90	90	65	2	16	12	2	—	—		166	20
ABR 1-6	105	105	90	2	36	—	—	—	2		276	20
ABR 1-7	90	50	55	2	20	—	2	—	—		108	20
ABR 1-8	70	70	55	2	20	—	2	—	—	ø11×11	109	20
ABR 1-9	50	50	35	2	8	—	2	—	—	ø14×14	49	20
ABR 1-10	60	60	45	2	12	—	2	—	—		76	20
ABR 1-11	90	90	65	2	13	—	5	—	—		160	20
ABR 1-12	105	105	90	2	28	—	4	—	1		269	20
ABR 1-13	140	140	65	2	24	—	—	4	—		260	20
ABR 1-14	90	90	65	2.5	16	12	2	—	—	—	208	20
ABR 1-15	105	105	90	2.5	36	—	—	—	2	—	345	20
ABR 1-16	105	105	90	3.0	36	—	—	—	2	—	412	20
ABR 1-17	90	50	55	2.5	20	—	2	—	—	—	134	20
ABR 1-18	70	70	55	2.5	20	—	2	—	—	—	139	20
ABR 1-19	140	140	65	2.5	26	—	2	—	—	—	344	10
ABR 1-20	172	105	90	3.0	44	—	7	—	2	ø14×14	517	10
ABR 1-21	145	145	90	2.5	56	—	—	—	8	—	450	10
ABR 1-22	145	70	90	2.5	17	—	—	—	4	—	342	10
ABR 1-23	128.5	128.5	45	2.5	12	4	1	—	—	ø11×9	213	20
ABR 1-24	90	90	65	2.5	13	9	5	—	—	ø11×11	206	20
ABR 1-25	105	105	90	2.5	28	—	4	—	1	ø14×14	337	20




Art-Nr.	dimensions[mm]				holes[mm]				weight [g]	pack [pcs]
	a	b	c	≠	ø5	ø11	ø7×15	ø7×20		
ABR 2-1	65	65	100	2.5	22	—	—	—	232	20
ABR 2-2	95	53	45	2.5	11	3	—	—	112	20
ABR 2-3	95	53	75	2.5	17	5	—	—	189	20
ABR 2-4	95	53	110	2.5	25	6	—	—	281	20
ABR 2-5	95	65	65	2.5	14	3	1	1	178	20

PERFORATED ANGLE BRACKET

Application: Basic angle brackets with universal perforation. Designed ribs increase the bending strength.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




name	dimensions[mm]				holes[mm]		weight [g]	pack [pcs]
	a	b	c	≠	ø5			
PABR-1	40	40	40	1.5	8		35	50
PABR-2	40	40	60	1.5	12		52	50
PABR-3	40	40	80	1.5	16		72	20
PABR-4	60	60	40	1.5	12		54	20
PABR-5	60	60	60	1.5	18		78	20
PABR-6	60	60	80	1.5	24		107	20
PABR-7	60	60	40	1.5	16		71	20
PABR-8	80	80	60	1.5	24		107	20
PABR-9	80	80	80	1.5	32		145	20

ADJUSTABLE ANGLE BRACKET


Application: They have adjustable holes, which facilitates the installation of non-standard elements.

Material: DX51D+Z275/S235/DC01


Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated



name	dimensions[mm]				holes[mm]		weight [g]	pack [pcs]
	a	b	c	≠	ø5			
ASAB 1-1	50	55	30	2.0	8	ø6.5×23.5; ø8.5×21.5	39	20
ASAB 1-2	70	55	30	2.0	9	ø6.5×23.5; ø8.5×21.5	50	20
ASAB 1-3	80	55	30	2.0	10	ø6.5×23.5; ø8.5×21.5	50	20
ASAB 1-4	120	55	30	2.0	10	ø6.5×58.5; ø8.5×21.5	68	20
ASAB 1-5	60	30	56	2.0	27	ø6.5×23.5	60	20
ASAB 1-6	60	34	56	2.0	27	ø8.5×21.5	58	20



name	dimensions[mm]				holes[mm]						weight [g]	pack [pcs]
	a	b	c	≠	ø5	ø6	ø9	ø11	ø13			
ASAB 2-1	75	65	20	3.0	—	2	—	—	—	ø5×45	59	20
ASAB 2-2	60	40	60	2.5	12	—	2	1	—	ø11×19	100	20
ASAB 2-3	75	45	65	4.0	—	3	—	—	—	ø6.5×50 ø6.5×23.5	193	20
ASAB 2-4	90	50	50	3.0	12	—	—	—	2	ø11×19	135	10




name	dimensions[mm]				holes[mm]			weight [g]	pack [pcs]
	a	b	c	≠	ø4.5	ø4.5×9.5	ø4.3×12		
ASAB 3-1	25	25	29	1.0	2	1	—	12	20
ASAB 3-2	40	28	22	1.0	1	—	1	11	20

PERFORATED ADJUSTABLE ANGLE BRACKET

Application: Basic angle brackets with universal perforation. Use adjustable holes facilitates the installation of non-standard elements.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]				holes[mm]			weight [g]	pack [pcs]
	a	b	c	≠	ø5	ø5×20	ø10×20		
PAAB-1	80	60	60	2.0	9	3	—	140	20
PAAB-2	80	60	60	2.0	9	3	—	140	20
PAAB-3	60	60	60	2.0	6	—	1	104	20
PAAB-4	80	80	80	2.0	12	—	1	189	20

ANCHOR ANGLE BRACKET

Application: Anchor angle brackets are intended for anchoring wood to concrete.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated

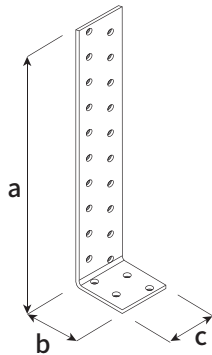


Art-Nr.	dimensions[mm]				holes[mm]				weight [g]	pack [pcs]
	a	b	c	≠	ø5	ø9	ø12	ø13		
AAB-1	200	40	40	2.0	24	—	—	—	140	20
AAB-2	300	40	40	2.0	34	—	—	—	198	20
AAB-3	400	40	40	2.0	44	—	—	—	258	20
AAB-4	210	43	40	4.0	19	—	—	1	288	10
AAB-5	300	43	40	4.0	27	1	—	—	392	10
AAB-6	200	40	40	2.0	20	—	1	—	140	20
AAB-7	300	40	40	2.0	30	—	1	—	198	20
AAB-8	400	40	40	2.0	40	—	1	—	258	20

CONCRETE ANGLE BRACKET

Application: Concrete angle bracket are mainly for fixing the wall board and ground beams for anchoring columns.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]				holes[mm]			weight [g]	pack [pcs]
	a	b	c	≠	ø5	ø11	ø13.5		
CAB-1	95	65	85	4.0	11	1	1	365	10
CAB-2	135	65	85	4.0	16	1	2	445	10
CAB-3	285	65	85	4.0	27	1	4	755	10

NARROW ANGLE BRACKET


Application: Brackets for small carpentry and furniture work.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated



Art-Nr.	dimensions[mm]				holes[mm]		weight [g]	pack [pcs]
	a	b	c	≠	ø4.5	ø6		
NAB 1-1	25	25	17	1.5	4	—	9	50
NAB 1-2	40	40	17	1.5	4	—	14	50
NAB 1-3	50	50	17	2.0	4	—	24	20
NAB 1-4	75	75	17	2.0	4	—	40	20
NAB 1-5	100	100	20	4.0	—	4	116	20
NAB 1-6	125	125	20	4.0	—	4	146	20
NAB 1-7	150	150	25	5.0	—	4	274	20




Art-Nr.	dimensions[mm]				holes[mm]	weight [g]	pack [pcs]
	a	b	c	≠	ø4.5		
NAB 2-1	25	25	14	1.5	4	9	50
NAB 2-2	30	30	14	1.5	4	9	50
NAB 2-3	40	40	15	1.5	4	13	50
NAB 2-4	50	50	15	1.5	4	23	50
NAB 2-5	60	60	15	1.5	4	37	50
NAB 2-6	80	80	19	2.0	6	45	20
NAB 2-7	100	100	19	2.0	6	57	20
NAB 2-7	125	125	22	2.0	6	83	20
NAB 2-7	150	150	22	2.0	6	101	20

ROUNDED ANGLE BRACKET

Application: Brackets for small carpentry and furniture work.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]				holes[mm]	weight [g]	pack [pcs]
	a	b	c	≠	ø6.5		
RAB-1	20	20	13	2.0	2	24	4 à 25 pcs.
RAB-2	30	30	13	2.0	4	35	4 à 25 pcs.
RAB-3	40	40	13	2.0	4	52	4 à 25 pcs.
RAB-4	50	50	13	2.0	4	68	4 à 25 pcs.

CONSTRUCTION ANGLE BRACKET

Application: Strong brackets made from thick material.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]				holes[mm]			weight [g]	pack [pcs]
	a	b	c	≠	ø4	ø7	ø7.5		
CAB-1	100	75	30	3.0	5	—	—	121	20
CAB-2	120	80	35	4.0	—	7	—	201	10
CAB-3	180	120	40	5.0	—	—	8	440	10
CAB-4	150	150	40	5.0	—	8	—	440	5

WIDE ANGLE BRACKET

Application: Universal brackets for small carpentry and furniture work.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]				holes[mm]		weight [g]	pack [pcs]
	a	b	c	≠	ø4.5			
WAB-1	30	30	30	1.5	4		21	50
WAB-2	40	40	40	1.5	4		37	50
WAB-3	60	60	60	2.0	8		113	20

WIDE ROUNDED ANGLE BRACKET

Application: Universal brackets for small carpentry and furniture work.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]				holes[mm]		weight [g]	pack [pcs]
	a	b	c	≠	ø4.5			
WRAB-1	20	19	40	1.5	4		13	20

BEAM CLAMP

Application: Universal beam connectors.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]		holes[mm]	weight [g]	packaging [pcs]
	a	≠	ø5		
BC-1	250	5.0	2	273	10

FLAT CONNECTOR

Application: Can be used both in standard and individual solutions.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]			holes[mm]				weight [g]	pack [pcs]
	a	b	≠	ø5	ø7	ø11	ø14		
FLC-1	100	35	2.5	8	—	2	—	62	20
FLC-2	140	55	2.5	20	—	2	—	139	20
FLC-3	200	35	2.5	16	—	4	—	122	20
FLC-4	280	55	2.5	36	—	4	—	279	20
FLC-5	180	65	2.5	16	12	2	—	210	20
FLC-6	210	90	2.5	36	—	—	2	341	20

NARROW FLAT CONNECTOR

Application: Narrow flat connectors for small carpentry and furniture work.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]			holes[mm]		weight [g]	pack [pcs]
	a	b	≠	ø4.5	ø6		
NFC-1	193	20	4.0	—	4	116	20
NFC-2	243	20	4.0	—	4	144	20
NFC-3	293	25	5.0	—	4	273	20
NFC-4	48	14	1.5	4	—	9	50
NFC-5	58	14	1.5	4	—	9	50
NFC-6	78	15	1.5	4	—	14	50
NFC-7	98	15	1.5	4	—	24	50
NFC-8	118	15	1.5	4	—	37	50
NFC-9	156	19	2.0	6	—	45	20
NFC-10	196	19	2.0	6	—	57	20
NFC-11	246	22	2.0	6	—	83	20
NFC-12	296	22	2.0	6	—	100	20

FOLDED CONNECTOR

Application: Connector for mounting at a non-standard angle of angled wooden elements.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]				holes[mm]		weight [g]	pack [pcs]
	a	b	c	≠	ø3	ø5		
FC-1	40	120	50	1.5	14	4	85	50

RAFTER CONNECTOR

Application: Specially designed connector for fixing rafters.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	side	dimensions[mm]			holes[mm]	weight [g]	pack [pcs]
		a	b	≠	ø5		
RC-1	L	170	32	2.0	20	98	20
RC-2	R	170	32	2.0	20	94	20
RC-3	L	210	32	2.0	28	132	20
RC-4	R	210	32	2.0	28	132	20
RC-5	L	250	32	2.0	36	172	20
RC-6	R	250	32	2.0	36	171	20
RC-7	L	290	32	2.0	44	208	20
RC-8	R	290	32	2.0	44	208	20

THICK CONNECTOR

Application: Made of thick material. Can be used both in standard and individual solutions.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]			holes[mm]				weight [g]	pack [pcs]
	a	b	≠	ø4	ø5	ø6.8	ø7.5		
TC-1	170	30	2.0	—	8	—	—	77	25
TC-2	172	30	3.0	5	—	—	—	119	20
TC-3	193	35	4.0	—	—	7	—	2017	20
TC-4	293	40	5.0	—	—	—	8	437	20

ROUNDED ASSEMBLY CONNECTOR

Application: Flat connectors for small carpentry and furniture works.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]			holes[mm]	weight [g]	pack [pcs]
	a	b	≠	ø6.5		
RAC-1	36.5	13	2.0	2	24	4 à 25 pcs.
RAC-2	56.5	13	2.0	4	35	4 à 25 pcs.
RAC-3	76.5	13	2.0	4	52	4 à 25 pcs.
RAC-4	96.5	13	2.0	4	68	4 à 25 pcs.

Z-TYPE CONNECTOR

Application: Connector for fixing perpendicular connections, with nails hammered in one direction.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated





Art-Nr.	dimensions[mm]				holes[mm]		weight [g]	pack [pcs]
	a	b	c	≠	ø5	ø11		
ZTC-1	21	70	10	2.5	9	1	100	20
ZTC-2	41	85	30	2.5	14	3	153	20
ZTC-3	51	85	30	2.5	14	3	163	20

T-TYPE CONNECTOR

Application: Used to fix horizontal beams on top of columns.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated



Art-Nr.	dimensions[mm]				holes[mm]					weight [g]	pack [pcs]
	a	b	c	≠	ø3.5	ø4.5	ø5	ø10	ø11		
TC-1	70	50	16	2.0	6	—	—	—	—	24	50
TC-2	150	127	38	2.0	—	—	10	—	3	131	20
TC-3	140	110	30	2.0	—	6	—	—	—	101	10
TC-4	160	140	45	2.5	—	20	—	—	—	212	10


Art-Nr.	dimensions[mm]			holes[mm]	weight [g]	packaging [pcs]
	a	b	≠	ø11		
TC-5	170	255	2.5	6	555	8

T-TYPE MOUNTING CONNECTOR

Application: Narrow T-type flat bars for small carpentry carpentry and furniture work.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated




Art-Nr.	dimensions[mm]				holes[mm]	weight [g]	pack [pcs]
	a	b	c	≠	ø6.5		
TMC-1	70	50	13	2.0	6	71	10

CORNER PLATE

Application: Connectors used for the assembly of window and door frames.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated

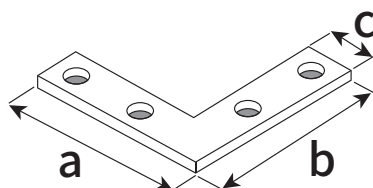


Art-Nr.	dimensions[mm]				holes[mm]					weight [g]	pack [pcs]
	a	b	c	≠	ø3.5	ø4	ø4.5	ø5.5	ø6		
CP 1-1	150	150	25	2.5	—	—	4	—	—	136	10
CP 1-2	200	200	30	2.5	—	—	—	6	—	218	10
CP 1-3	250	250	30	3.0	—	—	—	6	—	325	10
CP 1-4	300	300	40	4.0	—	—	—	—	6	697	10
CP 1-5	25	25	10	1.5	4	—	—	—	—	17	4 à 25
CP 1-6	30	30	10	1.5	4	—	—	—	—	22	4 à 25
CP 1-7	40	40	10	1.5	4	—	—	—	—	32	4 à 25
CP 1-8	50	50	10	2.0	—	4	—	—	—	14	50
CP 1-9	60	60	10	2.0	—	4	—	—	—	17	50
CP 1-10	75	75	12	2.0	—	4	—	—	—	26	50
CP 1-11	100	100	15	2.0	—	—	5	—	—	43	10

Application: A corner used to connect two mutually perpendicular beams.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated

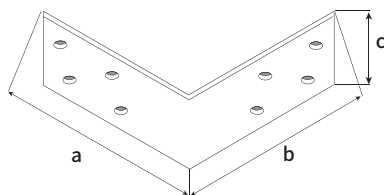


Art-Nr.	dimensions[mm]				holes[mm]	weight [g]	pack [pcs]
	a	b	c	≠	ø5		
CP 2-1	120	120	35	2.0	8	94	10
CP 2-2	150	150	35	2.0	10	123	10

DECORATIVE CORNER PLATE

Application: Flat connectors used for the assembly of window and door frames and door frames.

Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated

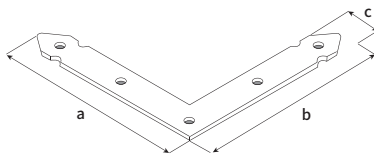


Art-Nr.	dimensions[mm]				holes[mm]			weight [g]	pack [pcs]
	a	b	c	≠	ø4.5	ø5	□7		
DCP-1	150	150	25	2	5	—	—	76	10
DCP-2	150	150	25	2.5	—	5	—	109	10
DCP-3	200	200	30	3.0	—	4	2	180	10
DCP-4	300	300	40	4.0	—	4	2	610	10
DCP-5	100	100	15	2.0	—	5	—	46	10

JOIST HANGER DIVIDED

Application: Joist hangers are used to fix ceiling joists.


Material: DX51D+Z275/S235/DC01

Coating: DX51D+Z275MAC, Hot-Dip Galvanization, Silver Zinc Plated, Yellow Zinc Plated

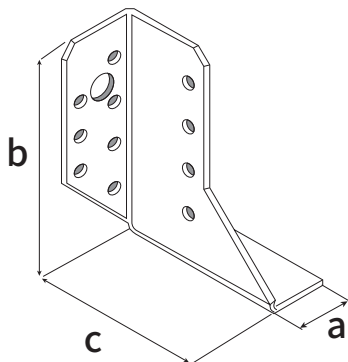


Art-Nr.	dimensions[mm]				holes[mm]		weight [g]	packaging [pcs]
	a	b	c	≠	ø5	ø11		
JHD-1	25	105	75	2.0	13	1	145	10
JHD-2	25	105	75	2.0	13	1	145	10
JHD-3	28	130	75	2.0	16	2	183	10
JHD-4	28	130	75	2.0	16	2	183	10
JHD-5	50	140	75	2.0	19	2	215	10
JHD-6	50	140	75	2.0	19	2	215	10
JHD-7	50	170	75	2.0	22	2	245	10
JHD-8	50	170	75	2.0	22	2	245	10
JHD-9	50	200	75	2.0	25	3	280	10
JHD-10	50	200	75	2.0	25	3	280	10

JOIST HANGER FOLDED




Art-Nr.	dimensions[mm]				holes[mm]		Weight [g]	packaging [pcs]	beam width (mm)
	a	b	c	≠	ø5	ø11			
JHF-1	45	97	75	2.0	16	2	241	10	45
JHF-2	48	96	75	2.0	16	2	241	10	48
JHF-3	48	136	75	2.0	20	2	321	10	
JHF-4	60	100	75	2.0	16	2	267	10	60
JHF-5	70	125	75	2.0	28	4	363	10	70
JHF-6	70	155	75	2.0	34	4	432	10	
JHF-7	76	122	75	2.0	28	4	361	10	76
JHF-8	76	152	75	2.0	34	4	434	10	
JHF-9	76	182	75	2.0	40	6	501	10	80
JHF-10	80	120	75	2.0	28	4	357	10	
JHF-11	80	150	75	2.0	34	4	429	10	
JHF-12	80	180	75	2.0	40	6	499	10	
JHF-13	80	210	75	2.0	46	6	568	10	100
JHF-14	100	140	75	2.0	34	4	430	10	
JHF-15	100	170	75	2.0	40	6	499	10	
JHF-16	100	200	75	2.0	46	6	568	10	
JHF-17	115	163	75	2.0	40	6	490	10	115
JHF-18	115	193	75	2.0	46	6	578	10	
JHF-19	120	160	75	2.0	40	6	496	10	120
JHF-20	120	190	75	2.0	46	6	583	10	
JHF-21	140	180	75	2.0	46	6	575	10	140
JHF-21	160	170	75	2.0	46	6	567	10	160

JOIST HANGER LIGHT




Art-Nr.	dimensions[mm]				holes[mm]		weight [g]	packaging [pcs]
	a	b	c	≠	ø5	ø11		
JHL-1	25	77	45	1.0	14	2	91	10
JHL-2	38	71	45	1.0	14	2	91	10
JHL-3	41	70	45	1.0	14	2	91	10
JHL-4	51	65	45	1.0	14	2	91	10
JHL-5	60	60	45	1.0	14	2	91	10

JOIST HANGER

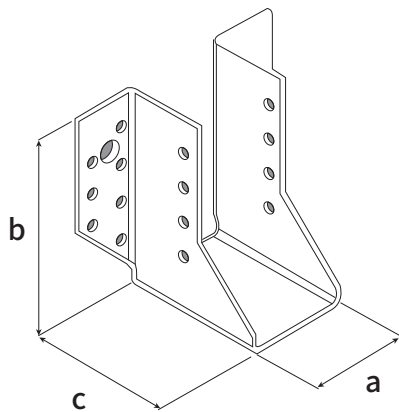

Art-Nr.	dimensions[mm]				holes[mm]		Weight [g]	packaging [pcs]	beam width (mm)
	a	b	c	≠	ø5	ø11			
JH-1	25	107	75	2.0	22	2	274	10	25
JH-2	25	118	75	2.0	22	2	295	10	
JH-3	25	146	75	2.0	28	4	363	10	
JH-4	28	176	75	2.0	34	4	432	10	28
JH-5	32	104	75	2.0	22	2	274	10	32
JH-6	32	114	75	2.0	22	2	297	10	
JH-7	32	144	75	2.0	28	4	363	10	
JH-8	32	174	75	2.0	34	4	432	10	
JH-9	38	101	75	2.0	22	2	274	10	38
JH-10	38	111	75	2.0	22	2	297	10	
JH-11	38	141	75	2.0	28	4	356	10	
JH-12	38	171	75	2.0	34	4	435	10	
JH-13	41	99	75	2.0	22	2	274	10	41
JH-14	41	110	75	2.0	22	2	297	10	
JH-15	41	140	75	2.0	28	4	361	10	
JH-16	41	170	75	2.0	34	4	427	10	
JH-17	45	97	75	2.0	22	2	274	10	45
JH-18	45	108	75	2.0	22	2	299	10	
JH-19	45	138	75	2.0	28	4	367	10	
JH-20	45	167	75	2.0	34	4	432	10	
JH-21	45	197	75	2.0	40	6	498	10	48
JH-22	48	96	75	2.0	22	2	274	10	
JH-23	48	106	75	2.0	22	2	297	10	
JH-24	48	136	75	2.0	28	4	363	10	
JH-25	48	166	75	2.0	34	4	432	10	51
JH-26	48	226	75	2.0	46	6	567	10	
JH-27	51	94	75	2.0	22	2	274	10	
JH-28	51	105	75	2.0	22	2	298	10	
JH-29	51	135	75	2.0	28	4	368	10	60
JH-30	51	165	75	2.0	34	4	430	10	
JH-31	51	195	75	2.0	40	6	496	10	
JH-32	60	100	75	2.0	22	2	297	10	
JH-33	60	130	75	2.0	28	4	368	10	64
JH-34	60	160	75	2.0	34	4	437	10	
JH-35	60	190	75	2.0	40	6	496	10	
JH-36	60	220	75	2.0	46	6	568	10	
JH-37	64	98	75	2.0	22	2	299	10	66
JH-38	64	128	75	2.0	28	4	363	10	
JH-39	66	217	75	2.0	46	6	567	10	70
JH-40	70	125	75	2.0	28	4	371	10	
JH-41	70	155	75	2.0	34	4	428	10	
JH-42	73	123	75	2.0	28	4	363	10	73
JH-43	73	153	75	2.0	34	4	432	10	
JH-44	73	183	75	2.0	40	6	498	10	
JH-45	76	122	75	2.0	28	4	376	10	76
JH-46	76	152	75	2.0	34	4	432	10	
JH-47	76	182	75	2.0	40	6	499	10	

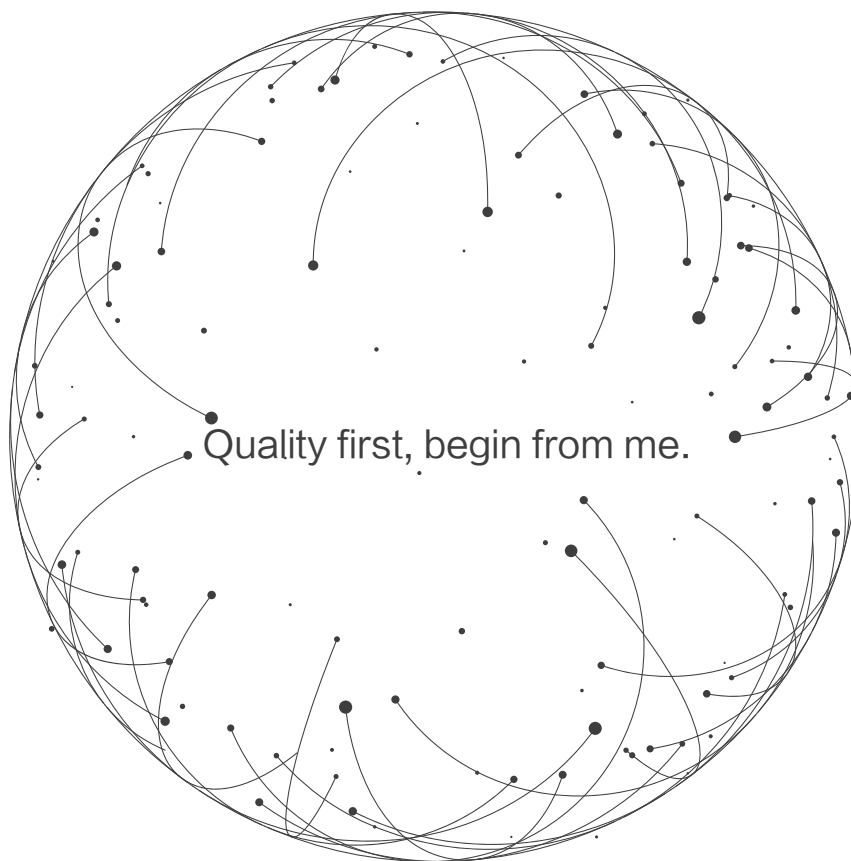

SSF INDUSTRIAL CO., LIMITED

Web: www.ssfwashers.com

Add: Zhengjia Town, Liaocheng City,
Shandong Province, China.

Sales dept.

Lilian Zheng

Mob: 0086 13475717117

Email: lilian@ssfwashers.com