

linear dimension (Tolerances Standard GB/T 14486-2008)	—											
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 160
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行	CLF	21.03.15	



UL/CUL 技术参数
UL/CUL Technical Data




等级	Use Group	B	C	D
额定电压	Rated Voltage	V	300	-
额定电流	Rated Current	A	8	-
接线范围	Wire Range			
单/多芯线	Solid/Stranded	AWG	28-16	
耐电压	Withstanding Voltage		1600V/1Min	

IEC 技术参数
IEC Technical Data

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	-	2	2
额定电压	Rated Voltage	V	160	320
额定电流	Rated Current	A	7	7
额定冲击电压	Rated impulse withstand voltage	kV	-	2.5
导线截面积	Conductor cross section	mm ²	1.5	
硬质/柔性导线	Solid/flexible			

材料	Material	
绝缘材料	Insulation Material	PA66
阻燃等级	Inflammability	UL94V-0
导体材料	Conductor Material	铜合金 Copper alloy
导体表面镀层	Conductive Coating	镀镍 Ni plated

间距	Pitch	mm	3.5
极数	Poles	p	2*24
剥线长度	Stripping Length	mm	7-8
螺丝	Screw/扭矩 Torque(Max)	Nm	M20/2
工作温度	Operating temperatur	°C	-40~+105
引脚尺寸	Pin Dimensions	mm	-
PCB板孔径	PCB Hole Diameter	mm	-

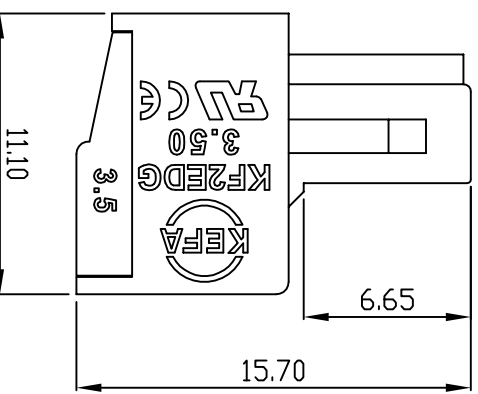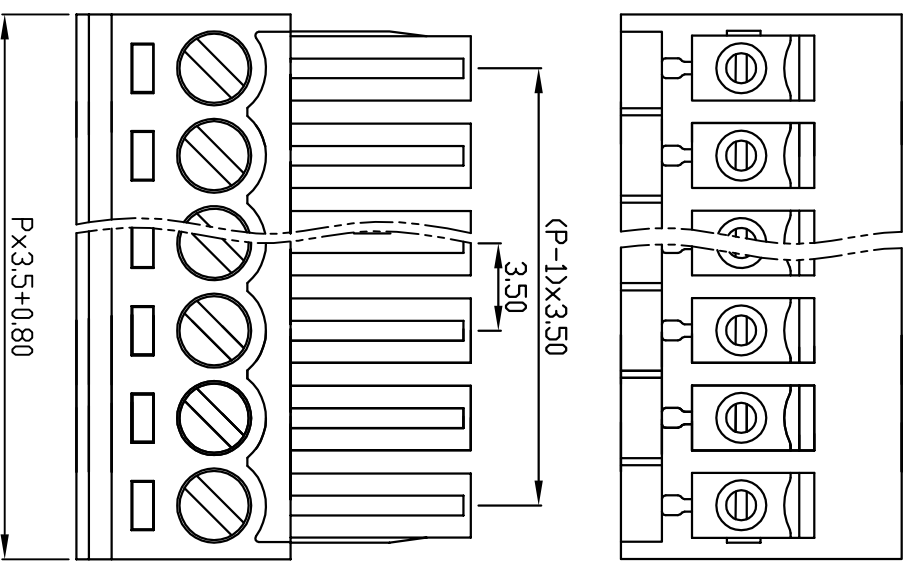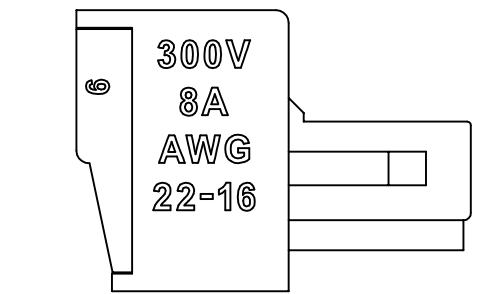

名称 / TITLE	KF2EDGK-3.5
------------	-------------

DES.	FZM	DATE	21.03.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	SY	DATE	21.03.15	APP.	CLF	DATE	21.03.15	慈溪市科发电子有限公司 CXI KEFA ELECTRONIC CO., LTD				