
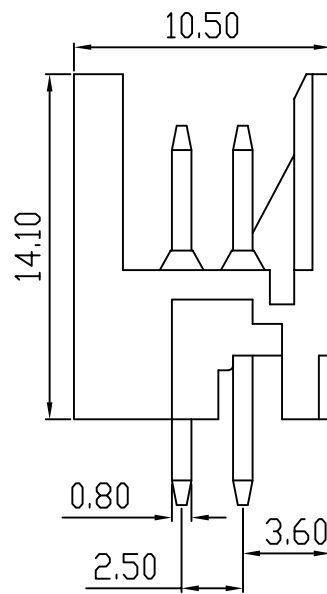
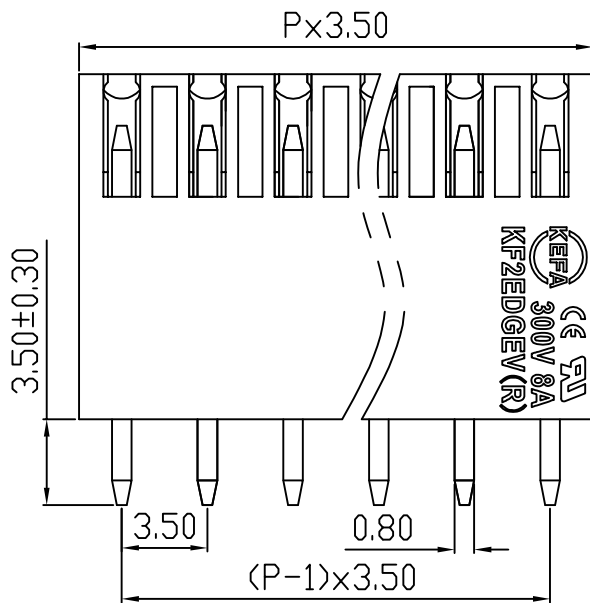
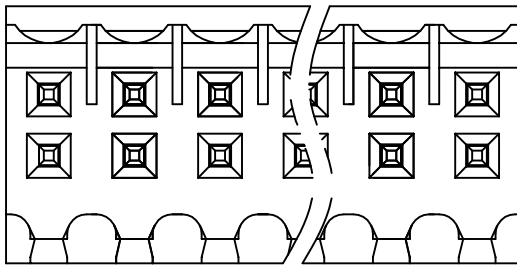


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

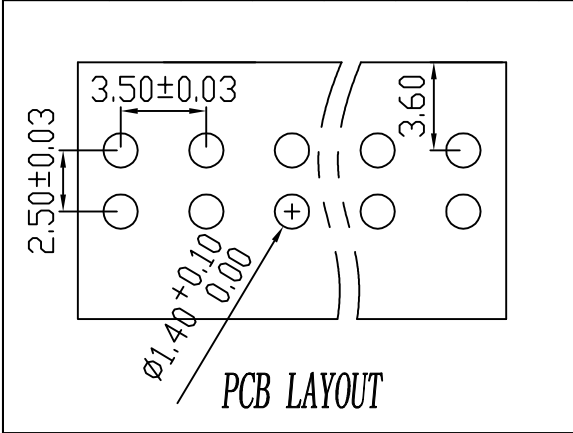

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		GLF	21.03.15

UL/CUL 技术参数 UL/CUL Technical Data						
等级	Use Group		B	C	D	
额定电压	Rated Voltage [V]		300	-	300	
额定电流	Rated Current [A]		8	-	10	
接线范围	Wire Range					
单/多芯线	Solid/Stranded [AWG]					
耐电压	Withstanding Voltage		1600V/1Min			
IEC 技术参数 IEC Technical Data						
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage [V]		-	160	320	
额定电流	Rated Current [A]		-	7	7	
额定冲击电压	Impulse withstand voltage <sup>a</sup> [KV]		-	2.5	2.5	
导线截面积	Conductor cross section					
硬质/柔性导线	Solid/flexible [mm <sup>2</sup> ]					
材料 Material						
绝缘材料	Insulation Material		PA66			
阻燃等级	Imflammability		UL94V-0			
导体材料	Contacting Material		铜合金 Copper alloy			
导体表面镀层	Contactive Coating		镀锡 Tin Plated			
一般参数 Other Data						
间距	Pitch [mm]		3.5			
极数	Poles [P]		2x(2-24)			
剥线长度	Stripping Length [mm]		-			
螺丝	Screw/扭矩 Torque(Max) [N.m]		-			
工作温度	Operating temperatur [°C]		-40~+105			
引针尺寸	Pin Dimensions [mm]		3.5			
PCB板孔径	PCB Hole Diameter [mm]		1.4			

DES.	FZM	DATE	21.03.15
CHK.	SY	DATE	21.03.15
APP.	CLF	DATE	21.03.15

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1
慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD					

第三视角/THIRD ANGLE PROJECTION		版本/REV	A
		名称/TITLE	KF2EDGEV-3.5