
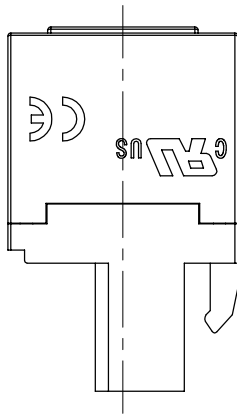
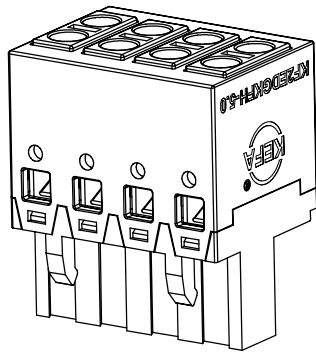
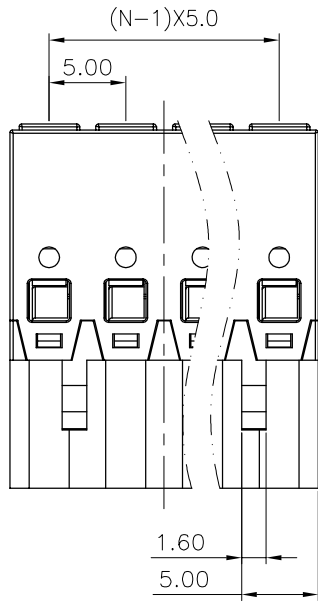
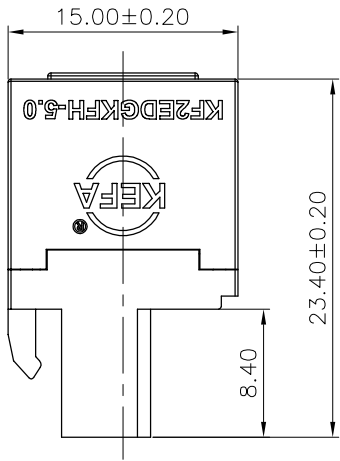


linear dimension(Tolerances Standard GB/T 14486-2008)										—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

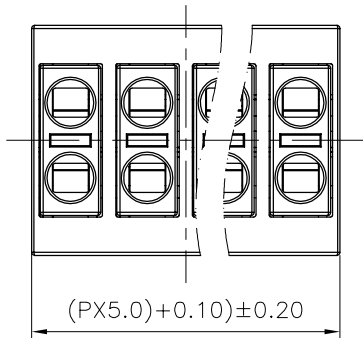

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术 参数				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围	Wire Range	24-16		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	AC 1.6KV/ 1 min		

IEC 技术参数				
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltagea [KV]	4	4	4
导线截面积 Conductor cross section				
柔性导线	Flexible conductor [mm²]	1.5		
柔性导线带端子	Flexible wire with terminal [mm²]	0.2-1.0		
硬质导线				

材料	Material
绝缘材料	Insulation Material
阻燃等级	Imflammability
导体材料	Contactur Material
导体表面镀层	Contactive Coating
材料	
绝缘材料	Insulation Material
阻燃等级	Imflammability
导体材料	Contactur Material
导体表面镀层	Contactive Coating

一般参数		Other Data
间距	Pitch [mm]	5.0
极数	Poles [P]	2~24P
剥线长度	Stripping Length [mm]	7~8
螺丝	Screw/扭矩 Torque(Max) [N.m]	/
工作温度	Operating temperatur [°C]	-40°C~ +105°C
引针尺寸	Pin Dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

DES.	FGG	DATE	2025.12.04
CHK.	LZH	DATE	2025.12.04
APP.	CSX	DATE	2025.12.04

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD					

第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
名称 / TITLE	KF2EDGKFH-5.0-XXP		