
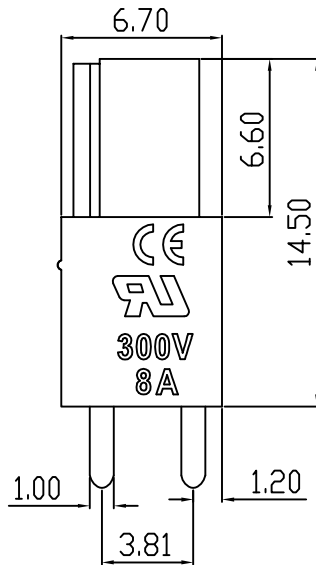
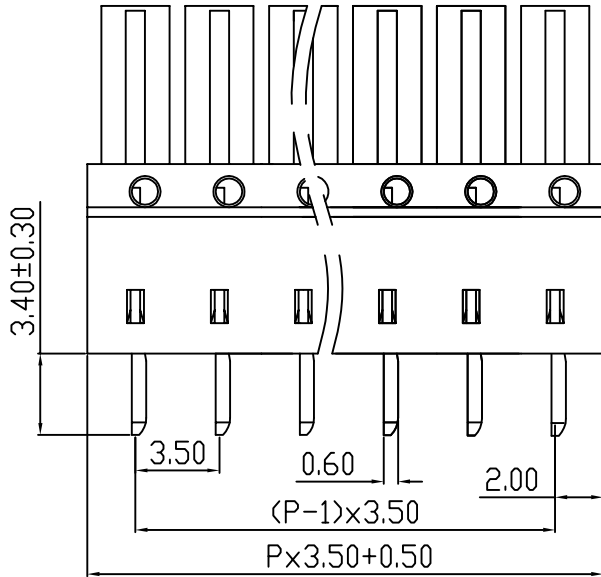
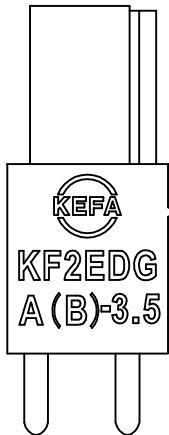
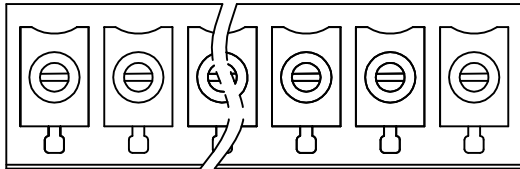


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

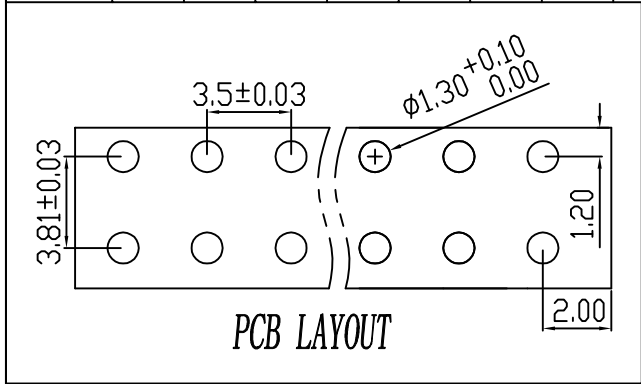


REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03.15

UL/CUL 技术 参数						
UL/CUL Technical Data						
等 级		Use Group	B	C	D	
额定电压		Rated Voltage	[V]	300	-	300
额定电流		Rated Current	[A]	8	-	10
接线范围		Wire Range	-			
单/多芯线		Solid/Stranded [AWG]				
耐电压		Withstanding Voltage	AC1600V/1Min			
IEC 技术参数						
IEC Technical Data						
过电压类别		Overvoltage Category	III	III	II	
污染等级		Contamination Class	3	2	2	
额定电压		Rated Voltage	[V]	-	160	320
额定电流		Rated Current	[A]	-	7	7
额定冲击电压		Impulse withstand voltagea	[KV]	-	2.5	2.5
导线截面积		Conductor cross section	-			
硬质/柔性导线		Solid/ flexible [mm ²]				
材 料						
绝缘材料		Insulation Material	热塑性材料 Thermoplastic			
导体材料		Contactor Material	铜合金 Copper alloy			
导体表面镀层		Contactive Coating	镀锡 Tin Plated			
一般参数 Other Data						
间距 Pitch		[mm]	3.5			
极数 Poles		[P]	2-24			
剥线长度 Stripping Length		[mm]	-			
螺丝 Screw/扭矩 Torque(Max)		[N.m]	-			
工作温度 Operating temperatur		[°C]	-40~+105			
引针尺寸 Pin Dimensions		[mm]	3.4			
PCB板孔径 PCB Hole Diameter		[mm]	1.3			
安装类型 Mounting type			波峰焊 Wave soldering			

DES.	FZM	DATE	21.03.15
CHK.	SY	DATE	21.03.15
APP.	CLF	DATE	21.03.15

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD					

第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
		名称 / TITLE	KF2EDGB-3.5