



Application

Wet chamber lamps operate within a temperature range of -25 ° C to 45 ° C, making them suitable for almost all areas. For example, in basements, studios, hobby rooms, cold storage rooms, kitchens, garages, and garden sheds.

Wet Room Light LED 36W 4320lm 4000 K Waterproof IP65 Ceiling LED Batten for Garage, Basement, Workshop

Description

LED lights guarantee IP65 certification and have dual protection against dust and water. The beam angle of the lamp tube is up to 120 °, without shadows or noise, flicker or glare. Made of PC material, sturdy and durable. There are junction boxes installed at both ends, and the tube lamp is equipped with installation materials, making the assembly process very convenient.



3-Year warranty




IP65

Microwave Motion Sensor/Photocell Function


The daylight threshold is set to "10Lux/25Lux/50Lux, stand-by period is set to "10s/10min"




With sufficient daylight, even when motion detected, light remains OFF.




With insufficient ambient brightness, light dims to 100% when motion was detected.




Light keeps on 100% within the holdtime.



Light dims to standby level if no motion detected after holdtime.



After the stand-by period, light OFF.

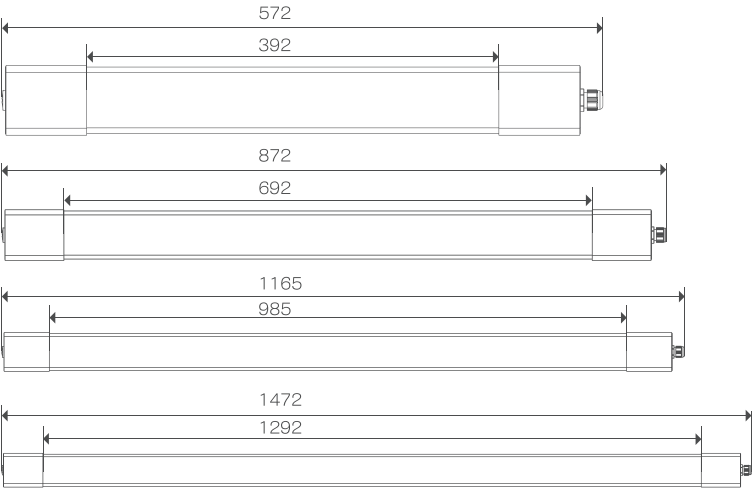

Specification

Input Voltage	PF	SDCM	CRI	Beam angle	Beam angle	Function
AC220-240V 50/60Hz	>0.5	<5	>80Ra	30,000Hrs	120°	On/Off / Photocell Motion Sensor

Model No.	Power	Lumen	Luminous Efficacy	CCT(K)	L*W*H(mm)
TP023-06C018	18W	Max 2160lm	>120lm/W	3000K/4000K/5000K/6000K	600x67x37
TP023-12C036	36W	Max 4320lm	>120lm/W	3000K/4000K/5000K/6000K	1200x67x37
TP023-15C046	46W	Max 5520lm	>120lm/W	3000K/4000K/5000K/6000K	1500x67x37