

# A SERIES

High-end smart LED poster



## A SERIES

- Aluminum frame, super lightweight and ultra slim
- Easy for plug-in with USB
- Internet cable and WIFI control available
- Front/rear access
- Intelligent group management
- Multi installation (standing, hanging, wall mounting)
- Adjustable standing angle can be 0°, 5°, 10°, 15°
- IP65, creative DIY



Rental



Profiled Stitching



Noise Free





High  
Definition




Ultra Slim

CE ETL RoHS EMC





FEATURES

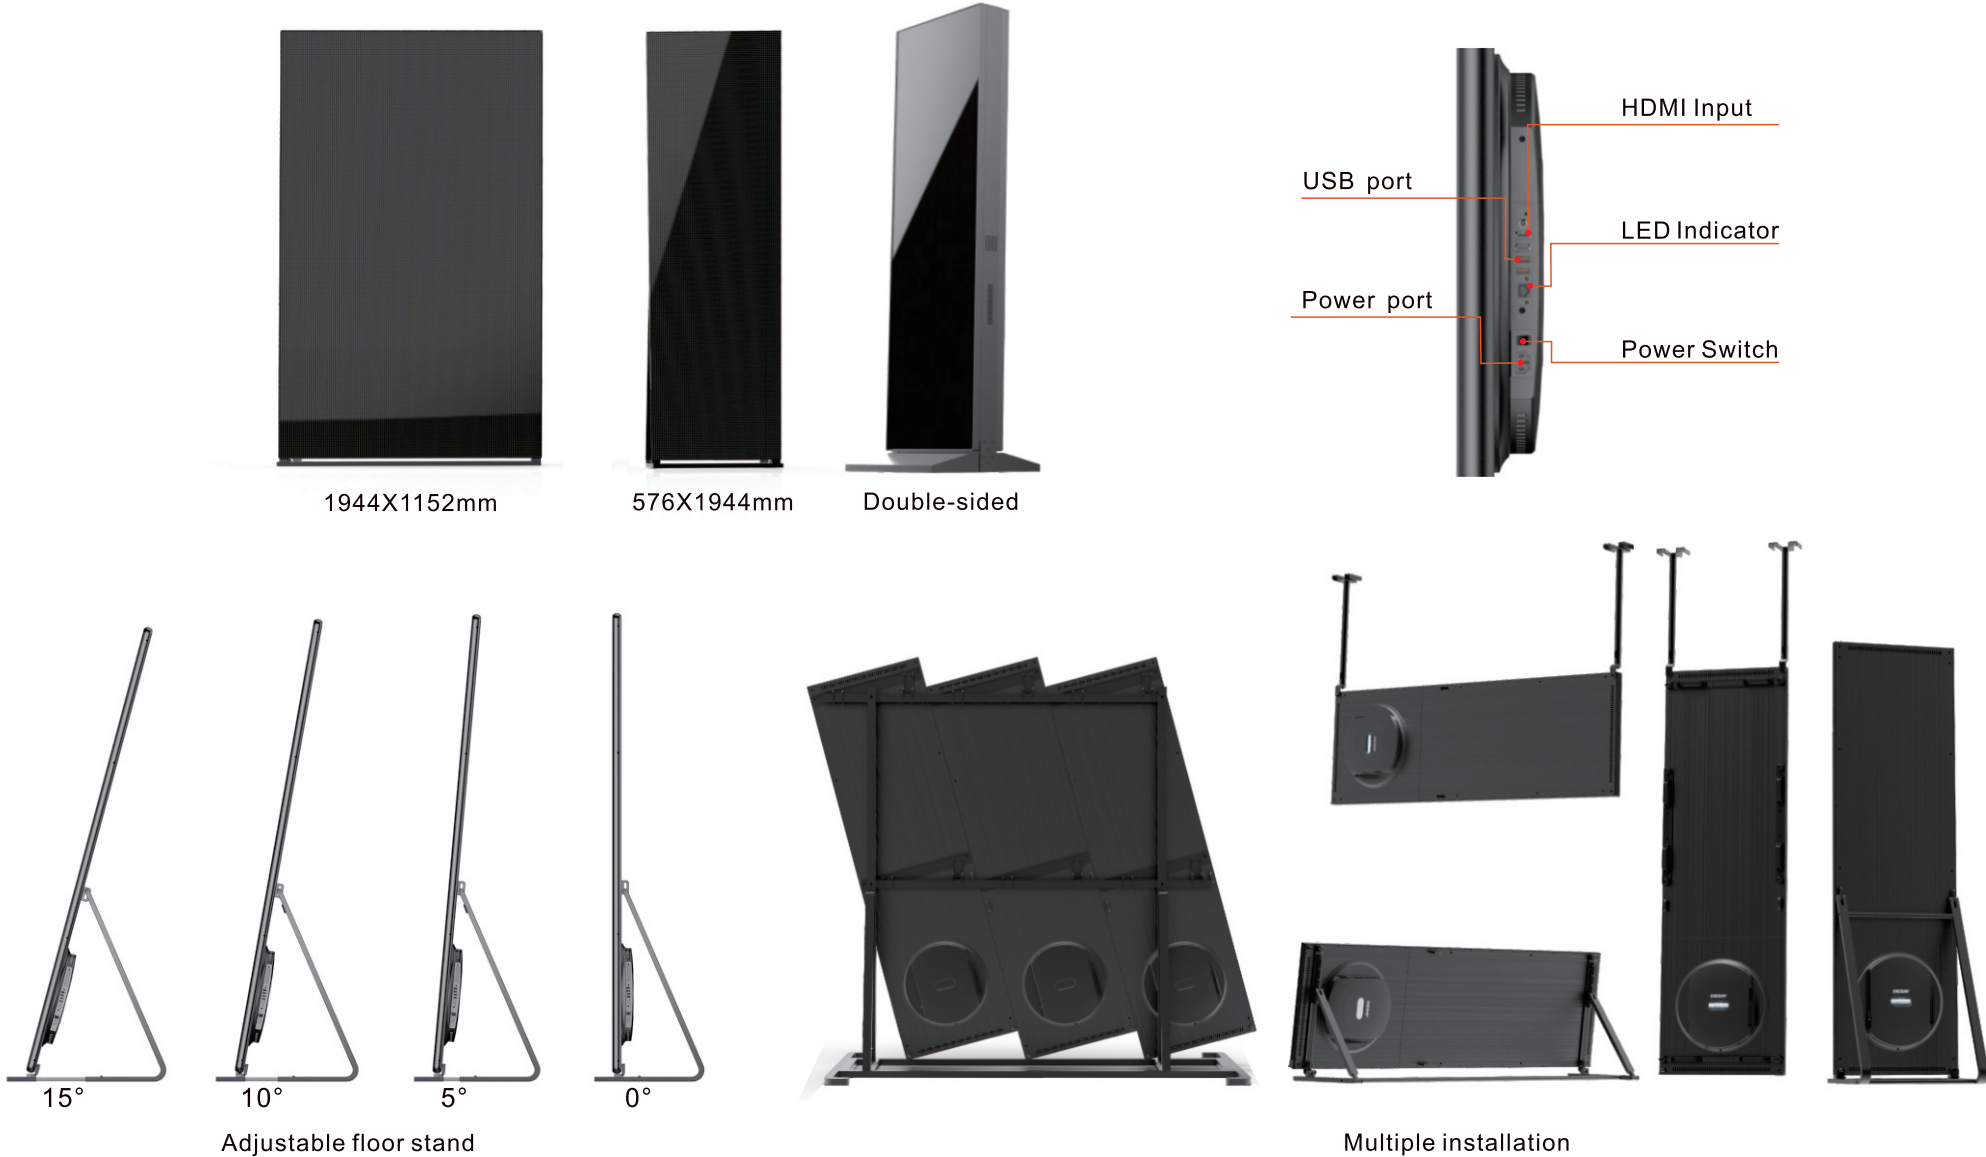

SPECIFICATIONS

| Parameter                               | Unit  | A1.9i         | A2.5i   | A1.9       | A2.5    |
|-----------------------------------------|-------|---------------|---------|------------|---------|
| Pixel pitch                             | mm    | 1.995         | 2.571   | 1.995      | 2.571   |
| Brightness                              | nits  | 800           | 1000    | 3000       | 3500    |
| Pixel configuration                     | R/G/B | SMD3 in 1     |         |            |         |
| Colourtemperature                       | deg.K | 6500          |         |            |         |
| Viewingangle-Horizontal(50% brightness) | deg.  | 160 (+70/-70) |         |            |         |
| Viewingangle-Vertical (50% brightness)  | deg.  | 140 (+70/-70) |         |            |         |
| Recommendedminimumviewingdistance       | m     | 1.9           | 2.5     | 1.9        | 2.5     |
| Panel width                             | mm    | 585.4         |         | 657        |         |
| Panel height                            | mm    | 1950.1        |         | 2250       |         |
| Panel depth                             | mm    | 40            |         | 85         |         |
| Panel area                              | m²    | 1.2169        |         | 1.4783     |         |
| Panel material                          |       | Aluminum      |         | Aluminum   |         |
| Panel weight                            | Kg    | 35            |         | 67         |         |
| Ingress protection (front/rear)         | IP    | 41/30         |         | 65/54      |         |
| Pixel matrix per panel                  |       | 288x972       | 224x756 | 288x972    | 224x756 |
| Brightnesscontrol                       |       | 255           |         |            |         |
| Digital processing                      | bit   | 13            |         |            |         |
| Frame rate                              | Hertz | 50/60         |         |            |         |
| Display refresh rate                    | Hertz | 1920          |         |            |         |
| Input voltage                           | VAC   | 100~240       |         |            |         |
| Input power frequency                   | Hertz | 50~60         |         |            |         |
| Input power (Max.)                      | W/m²  | 590           | 492     | 600        | 620     |
| Input power (Avg.)                      | W/m²  | 206           | 172     | 210        | 217     |
| Operating temperature range             | deg.C | - 10 ~ +40    |         | - 20 ~ +45 |         |
| Lifetime (50% brightness)               | Hour  | 100,000       |         |            |         |