


Product Introduction

Transparent film LED display is a new display technology with high transparency, bright colours and high brightness. Extremely easy to install. No need for steel frame structure, can be attached to the glass surface.

Widely used in glass curtain wall, glass window, glass railing, transportation hub, enterprise exhibition hall, automatic doors and windows, indoor partition, hanging banner and other scenes.



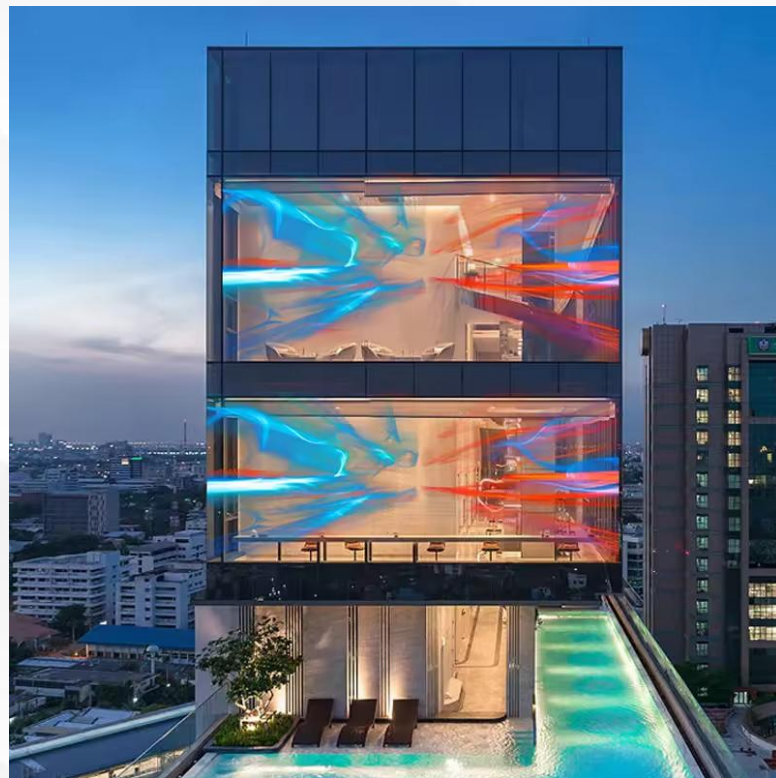

Product Parameters

Product	P4-8	P6.5	P5-10	P10	P12
Pixel pitch	4-8mm	6.5mm	5-10mm	10mm	12mm
Module size	1200mm*256mm	996mm*208mm	960*320mm	960mm*320mm	960mm*192mm
Display thickness	5mm	5mm	5mm	5mm	5mm
LED Type	SMD2121	SMD2121	SMD2121	SMD2121	SMD2121
Brightness	4000cd/m2	4500cd/m2	4500cd/m2	4500cd/m2	4500cd/m2
Pixel Density(pixel/m ²)	31250point/m2	23716dots/m2	20000dots/m2	10000dots/m2	6889dots/m2
Transparency	65%	55%	82%	82%	85%
Max Power	800W/m2	800W/m2	700W/m2	700W/m2	700W/m2
Average Power	300W/m2	300W/m2	280W/m2	260W/m2	260W/m2
Viewing Distance	4m~100m	6.5m~100m	5m~100m	10m~100m	10m~100m
Light-emitting components	National Star				
Control system	Calet, Moses, Nova synchronous/asynchronous				
Input Voltage	AC100-240V(50-60HZ)				
Protection Level	IP61				
Color Temperature(K)	6500~9500				
Refresh Rate	3840Hz				
Contrast	2000:1				
Life span	≥100,000 hours				
View Angle	H:140° V:140°				
Temperature-operating	-30°~ 65°				
Humidity-operating	10%~90%RH				



Product Parameters

Product	P16	P20	P25	P31.25	P40
Pixel pitch	16mm	20mm	25mm	31.25mm	40mm
Module size	960mm*256mm	960mm*320mm	960*320mm	960mm*320mm	960mm*320mm
Display thickness	5mm	5mm	5mm	5mm	5mm
LED Type	SMD2121	SMD2121	SMD2121	SMD2121	SMD2121
Brightness	3000cd/m2	2500cd/m2	1800cd/m2	1000cd/m2	600cd/m2
Pixel Density(pixel/m ²)	3906dots/m2	2500dots/m2	1600dots/m2	1024dots/m2	625dots/m2
Transparency	88%	90%	90%	92%	95%
Max Power	300W/m2	280W/m2	280W/m2	280W/m2	280W/m2
Average Power	150W/m2	120W/m2	120W/m2	120W/m2	120W/m2
Viewing Distance	16m~100m	20m~100m	20m~100m	20m~100m	20m~100m
Light-emitting components	National Star				
Control system	Calet, Moses, Nova synchronous/asynchronous				
Input Voltage	AC100-240V(50-60HZ)				
Protection Level	IP61				
Color Temperature(K)	6500~9500				
Refresh Rate	3840Hz				
Contrast	2000:1				
Life span	≥100,000 hours				
View Angle	H:140° V:140°				
Temperature-operating	-30°~ 65°				
Humidity-operating	10%~90%RH				




Product Features

1. Light weight, no pressure on glass
2. High permeability, does not affect viewing line of sight, permeability is as high as 85% or more
3. It can be bent and cut without size restrictions and can be flexibly customized according to customer needs;
4. Horizontal and vertical viewing angles of 140° , wide viewing range, no blind spots and no color cast
5. Easy to install, just attach it directly to the glass surface
6. Needle tip cooling principle, strong heat dissipation, no need for fans, air conditioners or separate cooling systems.




Film mounting

After attaching the cable, connect the power cable and signal cable to complete the installation.

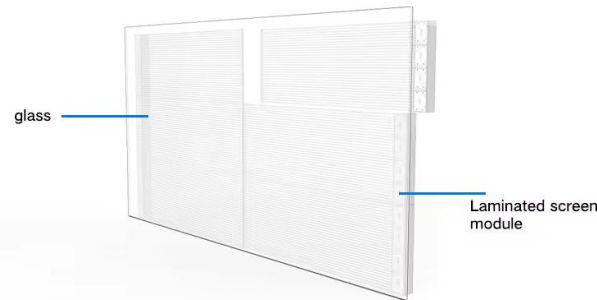


Application

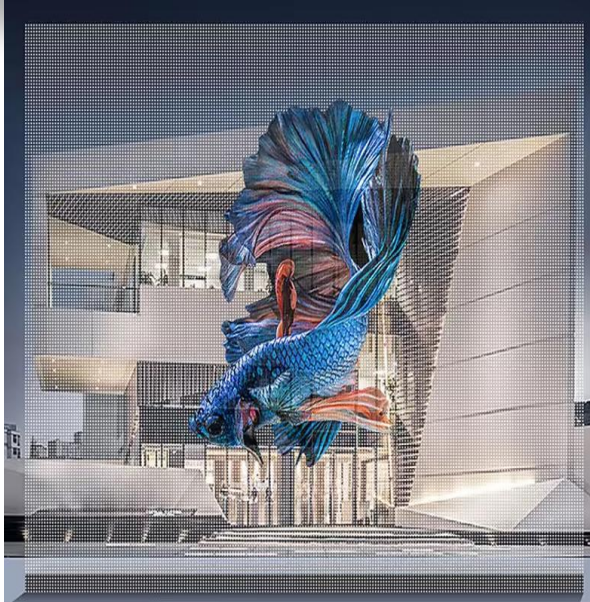

Project Case



Project Case

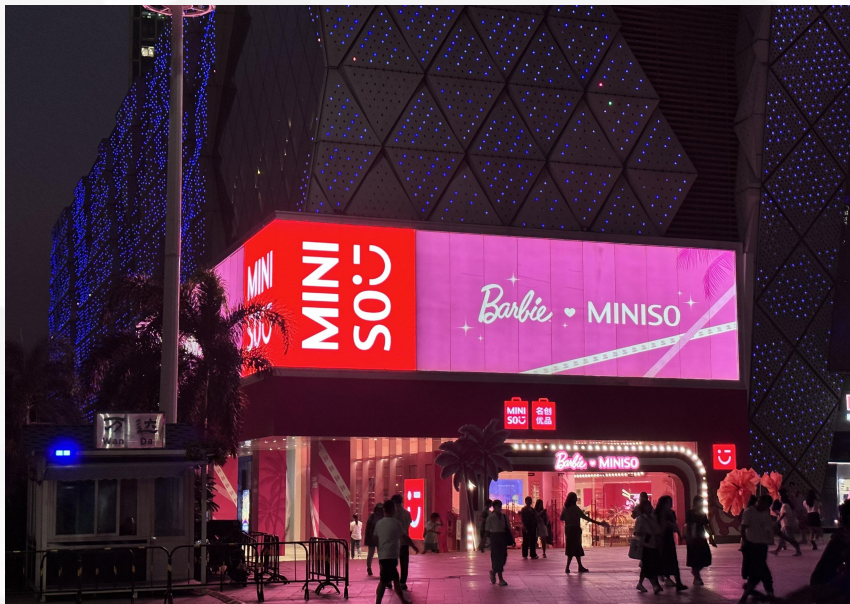

Service

Quality: we have a strict quality control system. All displays will undergo aging tests for 24hours at least.

Logo : your logo can be printed on the cabinet

Package: support for wooden package and flight case both.

MOQ: we accept sample order in small sqm , such as 2sqm , 4sqm.

Warranty: 3 years , free spare parts & free technical support

Lead time: 12 days after initial payment deposited

Payment method: T/T, Western Union

