

# Customized cube screen Series

**Guangzhou JunChen Group Purchase Co,Ltd.**

Website: [www.ledscreenwholesale.com](http://www.ledscreenwholesale.com)

Whatsapp: +86 18818901997

e-mail: [admin@ledscreenwholesale.com](mailto:admin@ledscreenwholesale.com)





# Customized cube screen Series

PRODUCT



## Features

- Two locks on each side
- New generation curve lock
- Both concave and convex curve
- Front and rear maintenance
- User-friendly handle
- 45 degrees cabinet angle, can make a cube out of 4 cabinets



# Customized cube screen Series


Pixel pitch	1.25mm	1.538mm	1.86mm	2mm	2.5mm
Module size	320mm*160mm				
Scan mode	1/43scan	1/43scan	1/43scan	1/40scan	1/32scan
Package mode	SMD1010	SMD1010	SMD1515	SMD1515	SMD2121
Pixel resolution	256dots(W)*128dots(H)	208dots(W)*104dots(H)	172dots(W)*86dots(H)	160dots(W)*80dots(H)	128dots(W)*64dots(H)
Drive type	Constant drive (IC:MBI5124/ICN2153)				
Color Configuration	SMD 3 in 1 1R1G1B				
Control system	Nova star				
Input Voltage	AC220V/50Hz or AC110V/60Hz				
Average Power consumption	330W/m <sup>2</sup>				
Cabinet size	customized				
Pixel density	640000dots/m <sup>2</sup>	422500dots/m <sup>2</sup>	289444dots/m <sup>2</sup>	250000dots/m <sup>2</sup>	160000dots/m <sup>2</sup>
Material	Die-casting Aluminum				
LED	Kinglight/ Nationstar				
Refresh Rate	2880/3840hz				
Colors	549 Billion				
Brightness	≥5000cd/m <sup>2</sup>				
Life span	≥100,000 hours				
IP rating(Front/Rear)	IP34				
Min. Viewing Distance	≥1.25m	≥1.538m	≥1.86m	≥2m	≥2.5m
View Angle	160°(W) 120°(H)				
Temperature-operating	-30°C ~ +60°C				
Humidity-operating	10%-95%				
Source compatibility	AV,DVI,HDMI,SDI,S-Video,DP etc				
Thickness	85mm				

# Customized cube screen Series

Application  
Venue




Match display

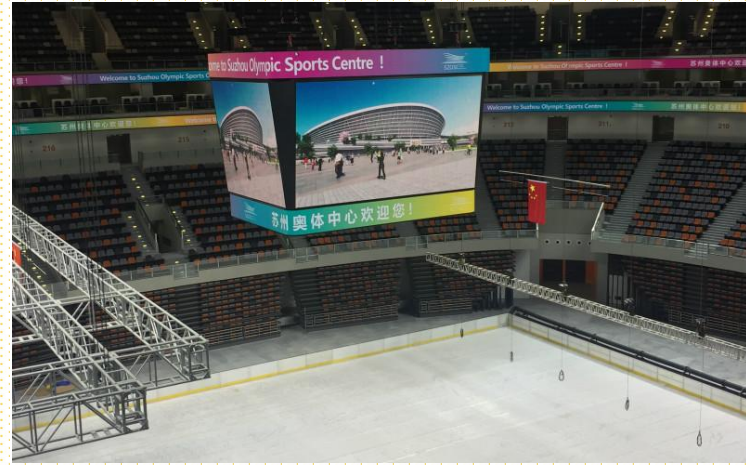

Sports event display



Welcome display

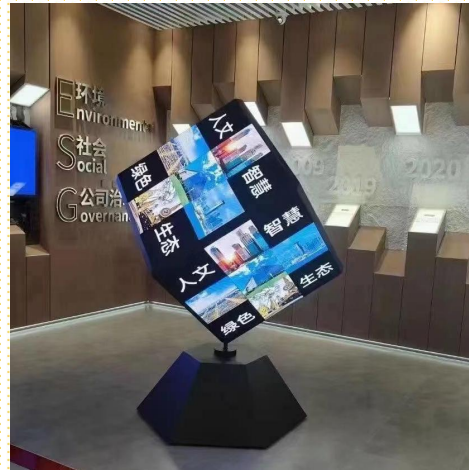

Exhibition hall



Entertainment square