



**QINGDAO NEW KETER TYRE CO., LTD**

ADD: A-25FL, Darron Center, No.180 Haier Road, Qingdao, China

Tel: 86-532-55579147, 86-532-55579148

Fax: 86-532-55579145

E-mail: info@ketertyre.com



**KETER**  
Your Care, Our Care

PROFESSIONAL • QUALITY • SAFETY



COMMERCIAL USE  
**TRUCK TYRE  
BROCHURE**

2024 – 2025

[www.keterglobal.com](http://www.keterglobal.com)

[www.keterglobal.com](http://www.keterglobal.com)





# ABOUT KETER TBR

Qingdao New Keter Tyre CO. Ltd., established in 2009, is a professional global tire resourcing Group. With a dedicated technical team, and excellent product development capabilities, KETER has garnered widespread recognition in the market, serving partners in over 170 countries worldwide.

In 2012, the KETER brand was launched, specializing in TBR products. KETER, positioning itself as "Excellent performance, quality choice" focuses on delivering high-performance products at competitive prices. Through close cooperation with state-owned suppliers, we guarantee consistent quality and supply reliability. Our product range includes over 30 patterns and more than 100 Sizes, covering a wide range of tyre types such as Long Haul, Regional, Mixed, Off-Road, and Winter.

Choose KETER as a trusted ally in your transportation.



· professional ·



· quality ·



· Safety ·

# The Exclusive KETER Production Line



Rubber Mix Lines  
KOBELCO(Japan)



Rubber Calender Lines  
IHI(Japan)



Extrusion Lines  
TROESTER(Germany)

**KETER** exclusive production line is located in the northwest of China.


The year-round dry climate is conducive to tyre manufacturing process and greatly reduces the quality problems caused by moisture.



One-Time  
Extrusion Aggregates  
TROESTER(Germany)



The Building Machine  
TOYO(Japan)

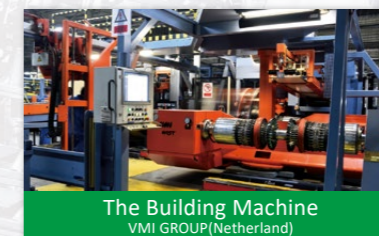

The Building Machine  
VMI GROUP(Netherland)



Cord Cutting lines  
KARL EUGEN FISCHER(Germany)



Dynamic  
Balance Machine



X-Ray  
Testing Machine



Tyre Uniformity Machine



Holographic Laser Nondestructive  
Bubble Testing Machine





# TRUCK & BUS TYRE

## How to Read the Pattern Name

K T H D 1


**KETER TYRES**

**H M O S W**  
Long Haul Mixed Off-Road Snow


**D S A T**  
Drive Steer All Trailer position

Product Version


KETER TBR




Long Haul






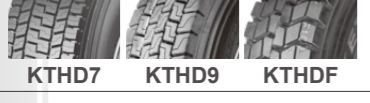

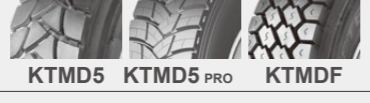


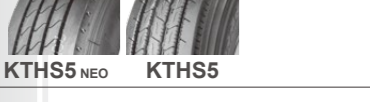





Mixed



Off-Road



Winter & 4S

Steer	 KTHS1 ECO KTHS1 KTHS2  KTHS5 NEO KTHS5 HS3			
Drive	 KTHD1 KTHD2 KTHD3  KTHD7 KTHD9 KTHDF	 KTMD1 KTMD2 KTMD3  KTMD5 KTMD5 PRO KTMDF	 KTSW KT4S	
Trailer	 KTHS1 ECO KTHS1 KTHS2  KTHS5 NEO KTHS5	 KTMT1 KTMT2		
All position	 KTHA1 KTHA2	 KTMA1 KTMA2	 KTOD1 KTOD6  KTOD8 KTODF	

# CONTENTS

## LONG HAUL 01




KTHD1	02
KTHD2	03
KTHD3	04
KTHD7	05
KTHD9	06
KTHDF	07
KTHS1 ECO	08
KTHS1	09
KTHS2	10
KTHS5 NEO	11
KTHS5	12
KTHA1	13
KTHA2	14

## MIXED 15



KTMD1	16
KTMD2	17
KTMD3	18
KTMD5	19
KTMD5 PRO	20
KTMDF	21
KTMT1	22
KTMT2	23
KTMA1	24
KTMA2	25

## WINTER & 4S 26



KTSW	27
KT4S	28

## OFF-ROAD 29




KTOD1	30
KTOD6	31
KTOD8	32
KTODF	33





# LONG HAUL

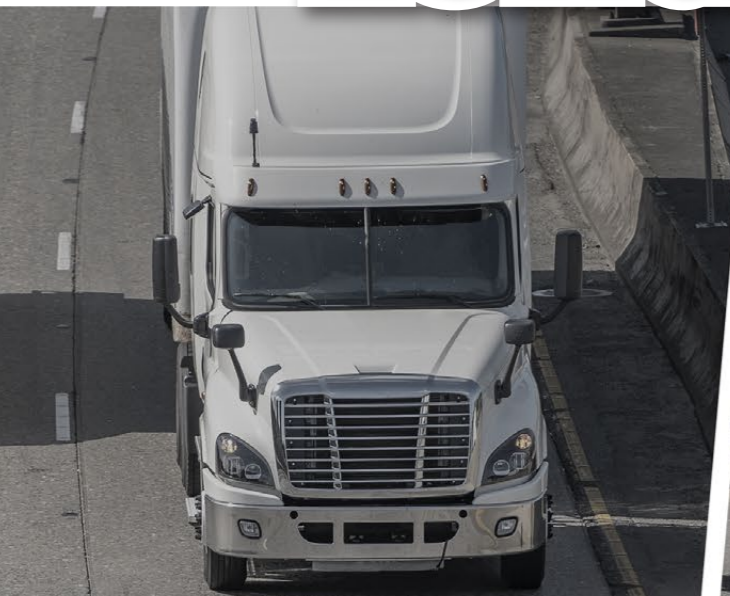

# KTHD1

LONG HAUL



- Special compound maintains good irregular wear resistance.
- Special pattern design provides good anti eccentric wear.



Drive 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
295/80R22.5	18	152/149 K	9.00	1044 / 41.1	298 / 11.7	3550/3250	900 / 131	22 / 28	TL
315/80R22.5	20	157/154 K	9.00	1078 / 42.4	315 / 12.3	4125/3750	900 / 131	21.5 / 27	TL



# KTHD2

LONG HAUL



- Widened tread design provides excellent driving and gripping power.
- Extra deep tread provides powerful traction and a long tread life.
- Closed shoulder maintains good irregular wear resistance.
- Excellent crack and tear resistance character.




**Drive** 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
295/75R22.5	16	146/143 K	9.00	1014 / 39.9	298 / 11.7	3000/2725	830 / 120	22 / 28	TL
285/75R24.5	16	147/144 K	8.25	1050 / 41.3	283 / 11.1	3075/2800	830 / 120	22 / 28	TL

# KTHD3

LONG HAUL



- Widened tread design provides excellent driving and gripping power.
- Extra deep tread provides powerful traction and a long tread life.
- Closed shoulder maintains good irregular wear resistance.
- Excellent crack and tear resistance character.



**Drive** 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
11R22.5	16	146/143 K	8.25	1054 / 41.5	279 / 11.0	3000/2725	830 / 120	20.5 / 26	TL
11R24.5	16	149/146 K	8.25	1104 / 43.5	279 / 11.0	3250/3000	830 / 120	21 / 26	TL
295/75R22.5	16	146/143 K	9.00	1014 / 39.9	298 / 11.7	3000/2725	830 / 120	23 / 29	TL



# KTHD7

LONG HAUL



- Wide and deep tread design extends tread life.
- Special tread pattern deliver a smooth and consistent wear
- Uniform block and lug design brings efficient traction on wet and dry roads.



**Drive** 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
12R22.5	18	152/149 K	9.00	1085 / 42.7	300 / 11.8	3550/3250	930 / 135	21 / 26	TL

# KTHD9

LONG HAUL



- Wide and deep tread design extends tread life.
- Special tread pattern deliver a smooth and consistent wear
- Uniform block and lug design brings efficient traction on wet and dry roads.



**Drive** 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
295/80R22.5	18	152/149 M	9.00	1044 / 41.1	298 / 11.7	3550/3250	900 / 131	19.5 / 25	TL



# KTHDF

LONG HAUL



- Good traction performance.
- Excellent resistance of groove cracking.
- Excellent anti-clamping stone and self-cleaning performance.
- Excellent durability.



**Drive**

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
9.5R17.5	18	143/141 J	6.75	842 / 33.1	240 / 9.4	2725/2575	875 / 127	15.5 / 20	TL
225/80R17.5	18	123/122 L	6.75	805 / 31.7	226 / 8.9	1550/1500	700 / 102	14 / 18	TL
235/75R17.5	18	143/141 J	6.75	797 / 31.4	233 / 9.2	2725/2575	875 / 127	15.5 / 20	TL
315/80R22.5	20	157/154 K	9.00	1044 / 41.1	312 / 12.3	4125/3750	900 / 131	20 / 25	TL

# KTHS1 ECO

LONG HAUL



- Improved tread design, high wear resistance and eccentric wear resistance.
- Low rolling resistance, Less fuel consumption, good handling quality.
- Four-groove design contributes to excellent drainage performance.



**Steer/Trailer**

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
295/80R22.5	18	148/145 K	8.25	958 / 37.7	276 / 10.9	3150/2900	900 / 131	14.5 / 18	TL



# KTHS1

LONG HAUL



- Tiny grooves, less noise and rolling resistance.
- Better braking, higher safety.
- Concave on the shoulder combined with low-heat-building formula makes better heat dissipation.



**Steer/Trailer** 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
285/75R24.5	16	147/144 L	8.25	1050 / 41.3	283 / 11.1	3075/2800	830 / 120	14 / 18	TL
295/80R22.5	18	152/149 L	9.00	1044 / 41.1	298 / 11.7	3550/3250	900 / 131	15 / 19	TL
315/80R22.5	20	157/154 L	9.00	1078 / 42.4	312 / 12.3	4125/3750	900 / 131	15 / 19	TL

# KTHS2

LONG HAUL



- Suitable for medium/long-haul vehicles running on high-grade road.
- Excellent load capacity, straight shallow grooves.
- Straight ride and Anti-sidewall-scuffing performance.



**Steer/Trailer** 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
12R22.5	18	152/149 L	9.00	1085 / 42.7	300 / 11.8	3550/3250	930 / 135	16.5 / 21	TL



# KTHS5 NEO

LONG HAUL



- Improved tread design, high wear resistance and eccentric wear resistance.
- Low rolling resistance, Less fuel consumption, good handling quality.



**Steer/Trailer**



SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
9.5R17.5	18	143/141 J	6.75	842 / 33.1	240 / 9.4	2069/1950	830 / 120	14 / 18	TL
11R22.5	16	146/143 M	8.25	1054 / 41.5	279 / 11.0	3000/2725	830 / 120	15.5 / 19.5	TL
12R22.5	18	152/149 L	9.00	1078 / 42.4	296 / 11.7	3550/3250	930 / 135	16.5 / 21	TL
11R24.5	16	149/146 L	8.25	1099 / 43.3	274 / 10.8	3250/3000	830 / 120	15.5 / 20	TL
215/75R17.5	16	127/124 L	6.00	766 / 30.2	216 / 8.5	1750/1600	830 / 120	12 / 15	TL
225/80R17.5	18	123/122 L	6.75	842 / 33.1	226 / 8.9	1550/1500	830 / 120	14 / 18	TL
235/75R17.5	16	132/129 L	6.75	797 / 31.4	233 / 9.2	2000/1850	830 / 120	13 / 16	TL
245/70R19.5	16	135/133 L	7.50	840 / 33.1	256 / 10.1	2180/2060	830 / 120	14 / 18	TL
255/70R22.5	16	140/137 L	7.50	930 / 36.6	255 / 10.0	2500/2300	830 / 120	13 / 16	TL
275/70R22.5	18	148/145 M	8.25	958 / 37.7	276 / 10.9	3150/2900	900 / 131	14 / 18	TL
275/80R22.5	18	149/146 L	8.25	1008 / 39.7	280 / 11.0	3250/3000	900 / 131	15 / 19	TL
295/60R22.5	18	150/147 M	9.00	926 / 36.5	292 / 11.5	3350/3075	900 / 131	16 / 20	TL
295/75R22.5	16	146/143 L	9.00	1010 / 39.8	294 / 11.6	3000/2725	830 / 120	15 / 19	TL
295/80R22.5	18	152/149 L	9.00	1044 / 41.1	298 / 11.7	3550/3250	900 / 131	15.5 / 20	TL
315/80R22.5	20	157/154 L	9.00	1044/41.1	312 / 12.3	4125/3750	900 / 131	16 / 20	TL

# KTHS5

LONG HAUL



- Improved tread design, high wear resistance and eccentric wear resistance.
- Low rolling resistance, Less fuel consumption, good handling quality.



**Steer/Trailer**



SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
11R22.5	16	146/143 M	8.25	1054 / 41.5	279 / 11.0	3000/2725	830 / 120	15 / 19	TL
11R22.5	18	149/146 L	8.25	1054 / 41.5	279 / 11.0	3250/3000	930 / 135	15 / 19	TL
11R24.5	16	149/146 M	8.25	1104 / 43.5	279 / 11.0	3250/3000	830 / 120	15 / 19	TL
295/75R22.5	16	146/143 M	9.00	1014 / 39.9	298 / 11.7	3000/2725	830 / 120	15 / 19	TL



# KTHA1

LONG HAUL



- High mileage.
- Reinforced skeleton material design.
- Optimized tyre grounding design prevents irregular wear.



All Position



SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
245/70R19.5	16	135/133 L	7.50	840 / 33.1	256 / 10.1	2180/2060	830 / 120	14 / 18	TL

# KTHA2

LONG HAUL



- Anti-wear performance.
- Good anti-clamping stone performance.
- Good grip performance.



All Position



SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
225/70R19.5	16	130/128 L	6.75	842 / 33.1	226 / 8.9	1900/1800	830 / 120	14 / 18	TL





**MIXED**



# KTMD1

MIXED SERVICE



- Big deep blocks provide strong traction and braking power.
- Open groove and bottom design given excellent self-cleaning performance  
Reinforced bead and body strengthen the puncture resistance, tear resistance.



Drive



SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
11.00R20	18	152/149 K	8.00	1085 / 42.7	293 / 11.5	3500/3250	930 / 135	20.5 / 26	TT



# KTMD2

MIXED SERVICE



- Big deep blocks provide strong traction and braking power.
- Open groove and bottom design given excellent self-cleaning performance  
Reinforced bead and body strengthen the puncture resistance, tear resistance.



**Drive** 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
7.50R16	14	122/118 K	6.00G	809 / 31.9	212 / 8.3	1500/1320	770 / 112	15.5 / 20	TT
8.25R16	18	132/128 K	6.50H	855 / 33.7	230 / 9.1	2000/1800	870 / 126	15 / 19	TT
9.00R20	16	144/142 K	7.0	1019 / 40.1	259 / 10.2	2800/2650	900 / 131	18.5 / 23	TT
10.00R20	18	149/146 K	7.5	1054 / 41.5	278 / 10.9	3250/3000	930 / 135	19 / 24	TT
315/80R22.5	20	157/154 K	9.00	1078 / 42.4	312 / 12.3	4125/3750	900 / 131	18 / 23	TL

# KTMD3

MIXED SERVICE



- Excellent puncture and tear resistance of the tread, great driving and braking performance.
- Deeper pattern, longer mileage.



**Drive** 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
9.00R20	16	144/142 K	7.0	1019 / 40.1	259 / 10.2	2800/2650	900 / 131	18.5 / 23	TT
10.00R20	18	149/146 K	7.5	1054 / 41.5	278 / 10.9	3250/3000	930 / 135	18.5 / 23	TT
11.00R20	18	152/149 K	8.0	1085 / 42.7	293 / 11.5	3550/3250	930 / 135	20 / 25	TT
12.00R20	20	156/153 K	8.5	1125 / 44.3	315 / 12.4	4000/3650	900 / 131	20.5 / 26	TT



# KTMD5

MIXED SERVICE



- Big deep blocks provide strong traction and braking power.
- Open groove and bottom design given excellent self-cleaning performance  
Reinforced bead and body strengthen the puncture resistance, tear resistance.



SIZE	PR	LOAD INDEX/SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
11R22.5	18	149/146 K	8.25	1054 / 41.5	279 / 11.0	3250/3000	930 / 135	22 / 28	TL
315/80R22.5	20	157/154 K	9.00	1078 / 42.4	312 / 12.3	4125/3750	900 / 131	20.5 / 26	TL

# KTMD5 PRO

MIXED SERVICE



- Super wide driving surface with stronger driving stability.
- Large tread block design with excellent driving and braking performance, safer handling
- Reinforced case and bead design with excellent durability and loading performance.



SIZE	PR	LOAD INDEX/SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
295/80R22.5	18	152/149 K	9.00	1044 / 41.1	298 / 11.7	3550/3250	900 / 131	21 / 26	TL



# KT MDF

MIXED SERVICE



- Wide and deep tread pattern provides long tread life.
- Aggressive diagonal block and lug pattern brings highly effective traction and braking performance.
- Tapered grooves and open shoulder prevent stone retention and provide self-cleaning capability.
- Special tread compound prevent tread cutting, chipping and chunking.



**Drive** 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
11R22.5	16	146/143 M	8.25	1054 / 41.5	279 / 11.0	3000/2725	830 / 120	21 / 26.5	TL
11R24.5	26	149/146 M	8.25	1104 / 43.5	279 / 11.0	3250/3000	830 / 120	23 / 29	TL

# KT MT1

MIXED SERVICE



- Good handling and traction and super abrasion resistance.
- Excellent heat disipation performance and excellent fuel efficiency.
- longer mileage.



**Trailer** 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
385/65R22.5	20	160 K	11.75	1072 / 42.2	389 / 15.3	4500/3250	900 / 131	26 / 20	TL



# KTMT2

MIXED SERVICE



- Excellent wear resistance.
- Low fuel consumption.
- Special tread formula to avoid heat increasing quickly.



**Trailer**



SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
385/65R22.5	20	160 K	11.75	1072 / 42.2	389 / 15.3	4500	900 / 131	16.7 / 21	TL

# KTMA1

MIXED SERVICE



- Good handling and traction and super abrasion resistance.
- Excellent heat dissipation performance and excellent fuel efficiency.
- longer mileage.

**All Position**



SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
6.50R16	12	110/105 K	5.50F	750 / 29.5	185 / 7.3	1060/925	670 / 97	10 / 13	TT
7.50R16	14	122/118 L	6.00G	802 / 31.6	212 / 8.3	1500/1320	770 / 112	13 / 16	TT
8.25R16	16	132/128 K	6.50H	802 / 31.6	212 / 8.3	2000/1800	870 / 126	13 / 16	TT
9.00R20	16	144/142 K	7.0	1019 / 40.1	259 / 10.2	2800/2650	900 / 131	15 / 19	TT
10.00R20	18	149/146 K	7.5	1054 / 41.5	278 / 10.9	3250/3000	930 / 135	15.5 / 20	TT
11.00R20	18	152/149 K	8.0	1085 / 42.7	293 / 11.5	3550/3250	930 / 135	16.5 / 21	TT
12.00R20	20	156/153 K	8.5	1125 / 44.3	315 / 12.4	4000/3650	900 / 131	17 / 21	TT
11R22.5	16	146/143 K	8.25	1054 / 41.5	279 / 11.0	3000/2725	830 / 120	15 / 19	TL
11R22.5	18	149/146 M	8.25	1054 / 41.5	279 / 11.0	3250/3000	930 / 135	-	TL
12R22.5	18	152/149 L	9.00	1044 / 41.1	304 / 12.0	3550/3250	900 / 131	16/20	TL
13R22.5	18	154/151 K	9.75	1124 / 44.3	320 / 12.6	3750/3450	930 / 135	17 / 21	TL
315/80R22.5	20	157/154 K	9.00	1078 / 42.4	312 / 12.3	4125/3750	900 / 131	15 / 19	TL



# KTMA2

MIXED SERVICE



- Optimized tread blocks improves the grip ability and makes the tyre stay agile in case of sudden movement.
- Air scoop shoulder ensures cool running at high speed, and it ensures longer mileage.
- This technology ensures long tread life under the condition of overloading and long-time running.



All Position



SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
7.00R16	14	118/114 L	5.50F	770 / 30.3	196 / 7.7	1320/1180	770 / 112	11.5 / 14	TT
9.00R20	16	144/142 K	7.0	1019 / 40.1	259 / 10.2	2800/2650	900 / 131	15.5 / 20	TT
10.00R20	18	149/146 K	7.5	1054 / 41.5	278 / 10.9	3250/3000	930 / 135	15.5 / 20	TT
11.00R20	18	152/149 K	8.0	1085 / 42.7	293 / 11.5	3550/3250	930 / 135	16 / 20	TT
12.00R20	20	156/153 K	8.5	1125 / 44.3	315 / 12.4	4000/3650	900 / 131	16.5 / 21	TT
12.00R24	20	160/157 K	8.5	1226 / 48.3	315 / 12.4	4500/4125	900 / 131	17.5 / 22	TT
11R22.5	18	149/146 M	8.25	1054 / 41.5	279 / 11.0	3250/3000	930 / 135	16 / 20	TL
11R24.5	16	149/146 L	8.25	1054 / 41.5	279 / 11.0	3250/3000	930 / 135	15.5 / 20	TL
13R22.5	20	156/153 L	9.75	1119 / 44.1	318 / 12.5	4000/3650	930 / 135	18 / 23	TL
295/80R22.5	18	152/149 L	9.00	1044 / 41.1	292 / 11.5	3550/3250	900 / 131	16 / 20	TL
315/80R22.5	20	157/154 L	9.00	1044 / 41.1	312 / 12.3	4125/3750	900 / 131	16 / 20	TL

# WINTER & 4S



# KT SW

WINTER & 4S



- Special pattern design meets different roads demands, offering longer mileage and saving more cost.
- Unique 3D sipe design provides extra blocks bite during running, enhancing the stability of the whole tread.
- 3D Sipe and common sipe layout on order can be used in different road situations.



Drive 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
11R22.5	16	146/143 K	8.25	1060 / 41.7	274 / 10.8	3000/2725	830 / 120	21 / 26	TL
11R24.5	16	149/146 K	8.25	1110 / 43.7	274 / 10.8	3250/3000	830 / 120	21 / 26	TL
295/75R22.5	16	146/143 L	9.00	1022 / 40.2	294 / 11.6	3000/2725	830 / 120	23 / 29	TL

# KT 4S

WINTER & 4S



- Deep tread design maximizes longevity.
- 'Snow-World' Design gives the tyres extra bite in snow and mud, avoiding the grip power decreased on snow and mud road condition.
- 'Open Shoulder' Design provides an excellent self-cleaning performance during running.



Drive 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
11R22.5	16	146/143 K	8.25	1056 / 41.6	284 / 11.2	3000/2725	720 / 104	22 / 28	TL
11R24.5	26	149/146 K	8.25	1112 / 43.8	274 / 10.8	3250/3000	830 / 120	22 / 28	TL





# OFF-ROAD



# KTOD1

OFF-ROAD



- Transverse big block type and deepened pattern design, provides superior driving performance.
- The open type groove design has a good self-cleaning ability.
- In particular, reinforced carcass design, provide greater carrying capacity.



All Position 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
9.00R20	16	144/142 D	7.0	1026 / 40.4	260 / 10.2	2800/2650	900 / 131	22.5 / 28	TT
10.00R20	18	149/146 D	7.5	1054 / 41.5	274 / 10.8	3250/3000	930 / 135	23 / 29	TT
12.00R20	20	156/153 G	8.5	1125 / 44.3	315 / 12.4	4000/3650	900 / 131	23.5 / 30	TT



# KTOD6

OFF-ROAD



- Excellent grip and driving performance.
- Excellent durability.
- Tear resistance pattern groove.



All Position 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
12R22.5	18	152/149 D	9.00	1044 / 41.1	298 / 11.7	3550/3250	900 / 131	16 / 20	TL

# KTOD8

OFF-ROAD



- Transverse big block type and deepened pattern design, provides superior driving performance.
- The open type groove design has a good self-cleaning ability.
- In particular, reinforced carcass design, provide greater carrying capacity.



All Position 

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
11.00R20	18	152/149 D	8.00	1098 / 43.2	288 / 11.3	3550/3250	930 / 135	24 / 30	TT



# KTODF

OFF-ROAD



- Open shoulder design with lower heat dissipation during driving.
- Connecting ribs between pattern blocks increase rigidity and combat groove bottom tearing.
- Deepened traverse pattern groove provides strong driving force on tough road.



All Position



SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
295/80R22.5	18	152/149 J	9.00	1044 / 41.1	298 / 11.7	3550/3250	900 / 131	22 / 28	TL

# KTODE

OFF-ROAD



- Block pattern design can improve better traction and braking function.
- Special compound can provides good tear and puncture resistance.
- The open groove design can avoid heat building and increase the service life of the tyre.



All Position



SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm)/inch	SECTION WIDTH (mm)/inch	LOAD Single/Dual	PRESSURE (kpa/psi)	O.T.D (mm)/32nds	TT/TL
11R22.5	18	149/146 G	8.00	-	-	3250/3000	930 / 135	-	-