

功率放大器产品目录

Power Amplifier Series Catalog

01-03 **C series professional power amplifier**
C系列专业功率放大器(2通道/4通道)

04-07 **DH series professional power amplifier**
DH系列专业功率放大器(2通道/4通道)

08 **H series professional power amplifier**
H系列专业功率放大器

09 **MA series professional power amplifier**
MA系列专业功率放大器

10 **TD series professional power amplifier**
TD系列专业功率放大器

LET MUSIC LIGHT UP LIFE
让音乐点亮生活

C SERIES

Professional power amplifier
专业功率放大器

产品参数

Combination parameters



C series two channels
C 系列 2 通道

C系列是我公司打造的一款精品放大器。它具有强大的功率性能和超低的失真度，能够轻松支持4Ω负载工作，广泛应用于酒吧DJ表演、会议展示、婚礼现场、舞台表演等场合。


The C Series is a premium amplifier meticulously crafted by our company. Boasting robust power performance and ultra-low distortion, it effortlessly supports 4Ω load operations and is widely used in various scenarios such as bar DJ performances, conference presentations, wedding receptions, and stage shows.

主要特点

- * 2U机箱设计，适用于不同场合下的机柜安装
- * 全新的电路以及极简的安装设计，产品具备高性价比
- * 三种工作模式：单声道、立体声和桥接模式
- * 具备硬件限压功能，可增加输入动态范围

Product performance

- * 2U chassis design, suitable for cabinet installation on different occasions.
- * New circuit and minimalist installation design, products with high cost performance.
- * Three working modes: mono, stereo and bridge.
- * With hardware pressure limit function, increase the input dynamic range.

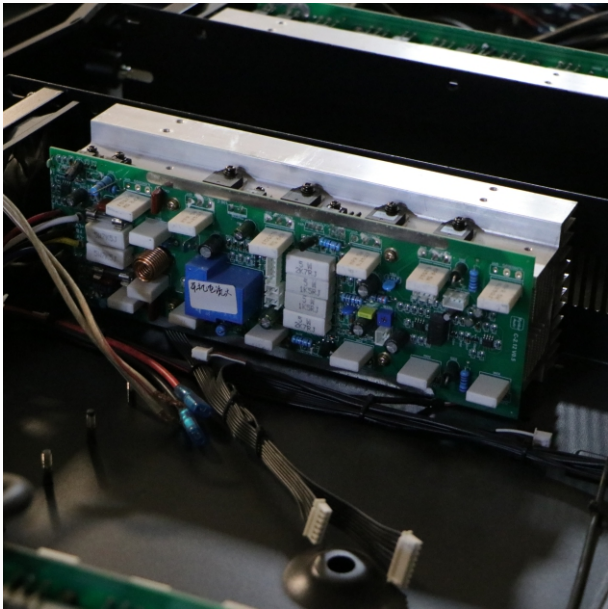

型号 Model	C2500	C2600	C2800	C21000
8Ω 立体声功率 Stereo power	8Ω 500W*2	8Ω 650W*2	8Ω 850W*2	8Ω 1000W*2
4Ω 立体声功率 Stereo power	4Ω 750W*2	4Ω 975W*2	4Ω 1275W*2	4Ω 1500W*2
总谐波失真 THD	0.05%1/8	0.05%1/8	0.05%1/8	0.05%1/8
桥接功率 Bridge power	1500W	1950W	2550W	3000W
信噪比 SNR	103dB	105dB	105dB	105dB
转换速率 Conversion rate	60V/us	60V/us	60V/us	80V/us
阻尼系数 Damping coefficient	400:1	500:1	500:1	500:1
频率响应 Frequency response	20Hz-20KHz(±0.3dB)			
输入灵敏度 Input sensitivity	0.775V/1V/1.44V			
输入阻抗 Input impedance	10K ohms(unbalanced) -20K ohms(balanced)			
最大功耗 Maximum power consumption	1800W	2700W	3500W	4200W
尺寸 Size	(D)450mm*(W)483mm*(H)88mm			
净重 Net weight	15.5kg	16.5kg	18.5kg	18.5kg

C SERIES

Professional power amplifier
专业功率放大器

产品参数

Combination parameters



C series two channels
C 系列 2 通道

C系列是我公司打造的一款精品放大器。它具有强大的功率性能和超低的失真度，能够轻松支持4Ω负载工作，广泛应用于酒吧DJ表演、会议展示、婚礼现场、舞台表演等场合。

The C Series is a premium amplifier meticulously crafted by our company. Boasting robust power performance and ultra-low distortion, it effortlessly supports 4Ω load operations and is widely used in various scenarios such as bar DJ performances, conference presentations, wedding receptions, and stage shows.

主要特点

- * 2U机箱设计，适用于不同场合下的机柜安装
- * 全新的电路以及极简的安装设计，产品具备高性价比
- * 三种工作模式：单声道、立体声和桥接模式
- * 具备硬件限压功能，可增加输入动态范围

Product performance

- * 2U chassis design, suitable for cabinet installation on different occasions.
- * New circuit and minimalist installation design, products with high cost performance.
- * Three working modes: mono, stereo and bridge.
- * With hardware pressure limit function, increase the input dynamic range.



型号 Model	C21200	C21600	C21800
8Ω 立体声功率 Stereo power	8Ω 1200W*2	8Ω 1600W*2	8Ω 1800W*2
4Ω 立体声功率 Stereo power	4Ω 1800W*2	4Ω 2250W*2	4Ω 2700W*2
总谐波失真 THD	0.01%1/8	0.01%1/8	0.01%1/8
桥接功率 Bridge power	3600W	4200W	4600W
信噪比 SNR	108dB	108dB	108dB
转换速率 Conversion rate	80V/us	80V/us	80V/us
阻尼系数 Damping coefficient	550:1	550:1	550:1
频率响应 Frequency response	20Hz-20KHz(±0.3dB)		
输入灵敏度 Input sensitivity	0.775V/1V/1.55V		
输入阻抗 Input impedance	10K ohms(unbalanced) -20K ohms(balanced)		
最大功耗 Maximum power consumption	5000W	5800W	6200W
净重 Net weight	22.5kg	24.5kg	26.5kg
尺寸 Size	(D)450mm*(W)483mm*(H)88mm		

C SERIES Professional power amplifier
专业功率放大器

产品参数Combination parameters



C series four channels
C 系列 4 通道

C系列是我公司打造的一款精品放大器。它具有强大的功率性能和超低的失真度，能够轻松支持4Ω负载工作，广泛应用于酒吧DJ表演、会议展示、婚礼现场、舞台表演等场合。

The C Series is a premium amplifier meticulously crafted by our company. Boasting robust power performance and ultra-low distortion, it effortlessly supports 4Ω load operations and is widely used in various scenarios such as bar DJ performances, conference presentations, wedding receptions, and stage shows.

主要特点

- * 2U机箱设计，适用于不同场合下的机柜安装
- * 全新的电路以及极简的安装设计，产品具备高性价比
- * 三种工作模式：单声道、立体声和桥接模式
- * 具备硬件限压功能，可增加输入动态范围

Product performance

- * 2U chassis design, suitable for cabinet installation on different occasions.
- * New circuit and minimalist installation design, products with high cost performance.
- * Three working modes: mono, stereo and bridge.
- * With hardware pressure limit function, increase the input dynamic range.



型号 Model	C4500	C4600	C4800	C41000	C41300
8Ω 立体声功率 Stereo power	8Ω 400W*4	8Ω 600W*4	8Ω 800W*4	8Ω 1000W*4	8Ω 1300W*4
4Ω 立体声功率 Stereo power	4Ω 600W*4	4Ω 900W*4	4Ω 1200W*4	4Ω 1400W*4	4Ω 1800W*4
频率响应 Frequency response	20Hz-20KHz	20Hz-20KHz	20Hz-20KHz	20Hz-20KHz	20Hz-20KHz
输入灵敏度 Input sensitivity	0.775V/	0.775V/	0.775V/	0.775V/	0.775V/
输入阻抗 Input impedance	20Kohms, 10Kohms				
面板指示灯 The panel light	Signal, dctive, clip/limiting,				
最大功耗 Maximum power consumption	2800VA/8.5A.5A	3500VA/10A	3800VA/10A	4200VA/13A	4600VA/13A
产品尺寸 Product size	483 (W) ×88 (H) ×450 (D) mm				
包装尺寸 Packing size	565mm*(W)535mm*(H)145mm				
净重 Net weight	22kg	26kg	28kg	30kg	32kg
尺寸 Size	24kg	28kg	30kg	32kg	34kg

DH SERIESProfessional power amplifier
专业功率放大器

产品参数

Combination parameters



DH series two channels
DH 系列 2 通道

DH系列是本公司超高性价比的专业数字功放。它采用先进的D类功率放大模块和高效的开关电源(SMPS)模块。内置DSP处理器，配备FIR滤波器，并设有多种调试端口(包括USB接口)。每个输入和输出通道均可设置总计31段均衡，均衡模式包括：参量均衡(PEQ)/低频搁架滤波(Lo - Shelf)/高频搁架滤波(Hi - Shelf)。

广泛应用于酒吧DJ表演、会议展示、婚礼现场、舞台表演等场合。

The DH Series represents our company's professional digital power amplifiers featuring exceptional cost - effectiveness. These amplifiers incorporate advanced Class - D power amplifier modules and high - efficiency switching mode power supply (SMPS) modules. They come with a built - in DSP processor, are equipped with FIR filters, and are provided with various debugging ports (including a USB interface). Each input and output channel can be configured with a total of 31 equalization bands. The equalization modes include parametric equalization (PEQ), low - shelf filtering (Lo - Shelf), and high - shelf filtering (Hi - Shelf).


Widely used in applications such as bar DJ performances, conference presentations, wedding receptions, stage performances, and other events.

主要特点

- * TFT屏幕显示：配备TFT高清显示屏
- * 最大输入电平：+17dBu(5.5V)
- * 分频器：低通滤波器、高通滤波器、滤波类型
- * 释放时间：10毫秒至3000毫秒，步长为1毫秒

Product performance

- * TFT Screen Display: Equipped with a high-definition TFT display
- * Maximum Input Level: +17dBu (5.5V)
- * Crossover: Low-pass filter (LPF), High-pass filter (HPF), Filter Type (PF Mode)
- * Release Time: 10ms-3000ms, Step: 1ms

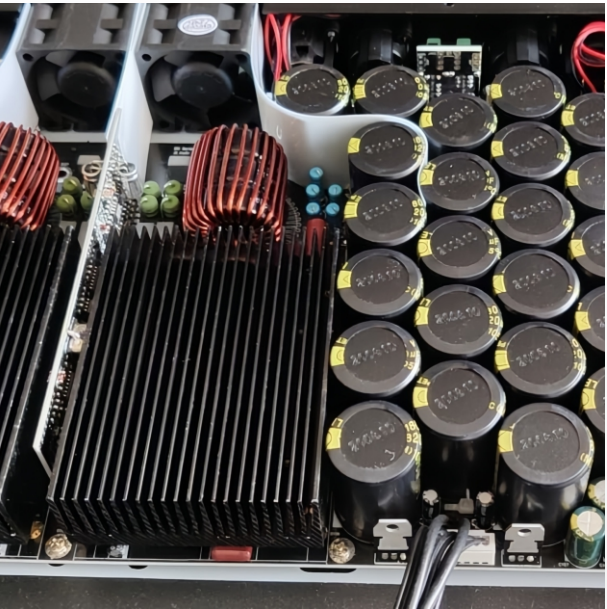

型号 Model	DH2-350	DH2-500	DH2-650	DH2-800	DH2-1000
8Ω 输出功率 Output power	8Ω 350W×2	8Ω 500W×2	8Ω 650W×2	8Ω 800W×2	8Ω 110W×2
4Ω 输出功率 Output power	4Ω 580W×2	4Ω 800W×2	4Ω 1050W×2	4Ω 1300W×2	4Ω 1800W×2
2Ω 输出功率 Output power	2Ω 800W×2	2Ω 1100W×2	2Ω 1400W×2	2Ω 1750W×2	2Ω 2000W×2
8Ω 桥接功率 Bridge power	1160W×1	1600W×1	2100W×1	2600W×1	3600W×1
4Ω 桥接功率 Bridge power	1600W×1	2200W×1	2800W×1	3500W×1	4000W×1
频率响应 Frequency response	20Hz-25kHz±0.5dB				
电源 Power supply	90V-265V/50Hz-60Hz				
阻尼系数 Damping coefficient:	> 600				
总谐波失真 THD	≤ 0.05%	≤ 0.05%	≤ 0.05%	≤ 0.05%	≤ 0.035%
信噪比 SNR	> 104dB	> 104dB	> 104dB	> 104dB	> 106dB
输入阻抗 Input impedance	Balance 20K/unbalance10K				
尺寸 Size	(W*L*H)483*228*45mm				
净重 Net weight	5.1kg	5.5kg	5.8kg	6. 2kg	7kg



DH series two channels
DH 系列 2 通道

DH系列是本公司超高性价比的专业数字功放。它采用先进的D类功率放大模块和高效的开关电源(SMPS)模块。内置DSP处理器，配备FIR滤波器，并设有多种调试端口(包括USB接口)。每个输入和输出通道均可设置总计31段均衡，均衡模式包括：参量均衡(PEQ)/低频搁架滤波(Lo - Shelf)/高频搁架滤波(Hi - Shelf)。

广泛应用于酒吧DJ表演、会议展示、婚礼现场、舞台表演等场合。

The DH Series represents our company's professional digital power amplifiers featuring exceptional cost - effectiveness. These amplifiers incorporate advanced Class - D power amplifier modules and high - efficiency switching mode power supply (SMPS) modules. They come with a built - in DSP processor, are equipped with FIR filters, and are provided with various debugging ports (including a USB interface). Each input and output channel can be configured with a total of 31 equalization bands. The equalization modes include parametric equalization (PEQ), low - shelf filtering (Lo - Shelf), and high - shelf filtering (Hi - Shelf).

Widely used in applications such as bar DJ performances, conference presentations, wedding receptions, stage performances, and other events.

主要特点

- * TFT屏幕显示： 配备TFT高清显示屏
- * 最大输入电平： +17dBu(5.5V)
- * 分频器： 低通滤波器、高通滤波器、滤波类型
- * 释放时间： 10毫秒至3000毫秒，步长为1毫秒

Product performance

- * TFT Screen Display: Equipped with a high-definition TFT display
- * Maximum Input Level: +17dBu (5.5V)
- * Crossover: Low-pass filter (LPF), High-pass filter (HPF), Filter Type (PF Mode)
- * Release Time: 10ms-3000ms, Step: 1ms



型号 Model	DH2-1500	DH2-2000	DH2-2500	DH2-3000
8Ω 输出功率 Output power	8Ω 1500W×2	8Ω 2000W×2	8Ω 2500W×2	8Ω 3000W×2
4Ω 输出功率 Output power	4Ω 2800W×2	4Ω 3400W×2	4Ω 3800W×2	4Ω/4500W×2
2Ω 输出功率 Output power	2Ω 3600W×2	2Ω 4000W×2	7600W×1	9000W×1
8Ω 桥接功率 Bridge power	5600W×1	6800W×1		
4Ω 桥接功率 Bridge power	7200W×1	8000W×1		
频率响应 Frequency response	20Hz-25kHz<±0.5dB			
电源 Power supply	90V-265V/50Hz-60Hz			
阻尼系数 Damping coefficient:				
总谐波失真 THD	≤ 0.035%	≤ 0.035%	≤ 0.035%	≤ 0.035%
信噪比 SNR	> 106dB	> 106dB	> 106dB	> 106dB
输入阻抗 Input impedance	Balance 20K/unbalance10K			
尺寸 Size	(W*L*H)483*228*45mm			
净重 Net weight	7.7kg	7.8kg	8. 1kg	8. 8kg

DH SERIESProfessional power amplifier
专业功率放大器

产品参数

Combination parameters



DH series four channels
DH 系列 4 通道

DH系列是本公司超高性价比的专业数字功放。它采用先进的D类功率放大模块和高效的开关电源(SMPS)模块。内置DSP处理器，配备FIR滤波器，并设有多种调试端口(包括USB接口)。每个输入和输出通道均可设置总计31段均衡，均衡模式包括：参量均衡(PEQ)/低频搁架滤波(Lo - Shelf)/高频搁架滤波(Hi - Shelf)。

广泛应用于酒吧DJ表演、会议展示、婚礼现场、舞台表演等场合。

The DH Series represents our company's professional digital power amplifiers featuring exceptional cost - effectiveness. These amplifiers incorporate advanced Class - D power amplifier modules and high - efficiency switching mode power supply (SMPS) modules. They come with a built - in DSP processor, are equipped with FIR filters, and are provided with various debugging ports (including a USB interface). Each input and output channel can be configured with a total of 31 equalization bands. The equalization modes include parametric equalization (PEQ), low - shelf filtering (Lo - Shelf), and high - shelf filtering (Hi - Shelf).

Widely used in applications such as bar DJ performances, conference presentations, wedding receptions, stage performances, and other events.

主要特点

- * TFT屏幕显示： 配备TFT高清显示屏
- * 最大输入电平： +17dBu(5.5V)
- * 分频器： 低通滤波器、高通滤波器、滤波类型
- * 释放时间： 10毫秒至3000毫秒，步长为1毫秒

Product performance

- * TFT Screen Display: Equipped with a high-definition TFT display
- * Maximum Input Level: +17dBu (5.5V)
- * Crossover: Low-pass filter (LPF), High-pass filter (HPF), Filter Type (PF Mode)
- * Release Time: 10ms-3000ms, Step: 1ms



型号 Model	DH4-350	DH4-500	DH4-650	DH4-800
8Ω 输出功率 Output power	8Ω 350W×4	8Ω 500W×4	8Ω 650W×4	8Ω 800W×4
4Ω 输出功率 Output power	4Ω 580W×4	4Ω 800W×4	4Ω 1050W×4	4Ω1300W×4
8Ω 桥接功率 Bridge power	1160W×2	1600W×2	2100W×2	2600W×2
频率响应 Frequency response	20Hz-25kHz≤±0.5dB			
电源 Power supply	90V-265V/50Hz-60Hz			
阻尼系数 Damping coefficient:	> 600			
总谐波失真 THD	≤ 0.05%	≤ 0.05%	≤ 0.05%	≤ 0.05%
信噪比 SNR	> 104dB	> 104dB	> 104dB	> 104dB
输入阻抗 Input impedance	Balance 20K/unbalance10K			
尺寸 Size	(W*L*H)483*228*45mm			
净重 Net weight	6kg	6.2kg	6.5kg	6.8kg

DH SERIESProfessional power amplifier
专业功率放大器

产品参数

Combination parameters



DH series four channels
DH 系列4 通道

DH系列是本公司超高性价比的专业数字功放。它采用先进的D类功率放大模块和高效的开关电源(SMPS)模块。内置DSP处理器，配备FIR滤波器，并设有多种调试端口(包括USB接口)。每个输入和输出通道均可设置总计31段均衡，均衡模式包括：参量均衡(PEQ)/低频搁架滤波(Lo - Shelf)/高频搁架滤波(Hi - Shelf)。

广泛应用于酒吧DJ表演、会议展示、婚礼现场、舞台表演等场合。

The DH Series represents our company's professional digital power amplifiers featuring exceptional cost - effectiveness. These amplifiers incorporate advanced Class - D power amplifier modules and high - efficiency switching mode power supply (SMPS) modules. They come with a built - in DSP processor, are equipped with FIR filters, and are provided with various debugging ports (including a USB interface). Each input and output channel can be configured with a total of 31 equalization bands. The equalization modes include parametric equalization (PEQ), low - shelf filtering (Lo - Shelf), and high - shelf filtering (Hi - Shelf).

Widely used in applications such as bar DJ performances, conference presentations, wedding receptions, stage performances, and other events.

主要特点

- * TFT屏幕显示： 配备TFT高清显示屏
- * 最大输入电平： +17dBu(5.5V)
- * 分频器： 低通滤波器、高通滤波器、滤波类型
- * 释放时间： 10毫秒至3000毫秒，步长为1毫秒

Product performance

- * TFT Screen Display: Equipped with a high-definition TFT display
- * Maximum Input Level: +17dBu (5.5V)
- * Crossover: Low-pass filter (LPF), High-pass filter (HPF), Filter Type (PF Mode)
- * Release Time: 10ms-3000ms, Step: 1ms



型号 Model	DH4-1000	DH4-1500	DH4-2000
8Ω 输出功率 Output power	8Ω 1000W×4	8Ω 1500W×4	8Ω 1800W×4
4Ω 输出功率 Output power	4Ω 1700W×4	4Ω 2300W×4	4Ω 2300W×4
8Ω 桥接功率 Bridge power	3400W×2	4600W×2	4600W×2
频率响应 Frequency response	20Hz-25kHz±0.5dB		
电源 Power supply	90V-265V/50Hz-60Hz		
阻尼系数 Damping coefficient:	> 600		
总谐波失真 THD	≤ 0.05%	≤ 0.035%	≤ 0.035%
信噪比 SNR	> 104dB	> 106dB	> 106dB
输入阻抗 Input impedance	Balance 20K/unbalance10K		
尺寸 Size	(W*L*H)483*381*45mm		
净重 Net weight	7kg	10. 2kg	10. 2kg

H SERIES

Professional power amplifier
专业功率放大器

产品参数

Combination parameters



主要特点

- * 配备TFT高清显示屏
- * 多重保护功能
- * 支持多设备输入
- * 内置纯铜环形变压器

Product performance

- * Equipped with a high-definition TFT display
- * Multiple protection functions
- * Support for multi-device input
- * Built-in pure copper toroidal transformer



此系列功率放大器是一款电路成熟，效率高强，设计新颖，性能稳定的功放。简洁大方的布局令您喜心悦目。采用了特殊的轨道式结构的大型散热系统，结合了可变速风扇进行器件冷却，大大加强了散热能力；完善的各类保护包括了直流输出保护，过载保护，短路保护，过热保护，保证了设备的安全可靠；精心挑选匹配的高精度元器件，使本机的音质表现的饱满，细腻，完美。是您高品质音箱的理想搭档。
广泛应用于酒吧DJ表演、会议展示、婚礼现场、舞台表演等场合。

This series of power amplifiers features a mature circuit design, high efficiency, novel aesthetics, and stable performance. Its clean and elegant layout is visually appealing. The amplifiers are equipped with a special large - scale rail - type heat dissipation system combined with variable - speed fans for component cooling, which greatly enhances heat dissipation capacity. A comprehensive protection system includes DC output protection, overload protection, short - circuit protection, and over - heat protection, ensuring the safety and reliability of the equipment. The carefully selected and matched high - precision components enable the amplifier to deliver full, delicate, and perfect sound quality, making it an ideal partner for your high - quality speakers.
Widely used in applications such as bar DJ performances, conference presentations, wedding receptions, stage performances, and other events.

型号 Model	H300	H500	H600	H800	H1000	H1200
8Ω 立体声功率 Stereo power	350W*2	500W*2	650W*2	850W*2	1000W*2	1200W*2
4Ω 立体声功率 Stereo power	525W*2	750W*2	975W*2	1500W*2	1500W*2	1800W*2
8Ω 桥接功率 Bridge power	1050W	1050W	1950W	2550W	3000W	3600W
信噪比 SNR	103dB	103dB	105dB	105dB	105dB	108dB
转换速率 Conversion rate	60V/us	60V/us	60V/us	60V/us	80V/us	80V/us
阻尼系数 Damping coefficient	400:1	400:1	500:1	500:1	550:1	550:1
频率响应 Frequency response	20Hz-20KHz(±0.3dB)					
输入灵敏度 Input sensitivity	0.775V/1V/1.44V					
输入阻抗 Input impedance	10K ohms(unbalanced) -20K ohms(balanced)					
最大功耗 Maximum power consumption	1100W	1800W	2700W	3500W	4200W	5000W
尺寸 Size	(D)450mm*(W)483mm*(H)88mm					
净重 Net weight	14.5kg	15.5kg	16.5kg	18.5kg	20.5kg	22.5kg

MA SERIES

Professional power amplifier
专业功率放大器

产品参数

Combination parameters




主要特点

- * 强力双风扇散热
- * 多重保护功能
- * 支持多设备输入
- * 内置进口大功率管

Product performance

- * Strong dual-fan heat dissipation
- * Multiple protection functions
- * Support for multi-device input
- * Built-in high-power imported tubes

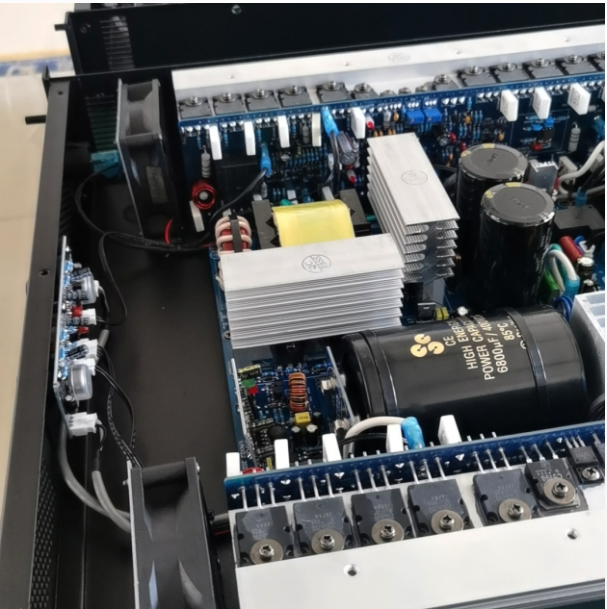

MA 系列是本公司打造的高品质功率放大器。具备超强功率性能与超低失真度；拥有过流保护、直流保护、短路保护、限幅保护等五种保护功能。温控风扇可实现无级变速。广泛应用于酒吧DJ表演、会议展示、婚礼现场、舞台表演等场合。

MA series is the company to create the high-quality power amplifier. Super power performance, ultra-low distortion; It has over current protection, DC protection, short circuit protection, limiting protection 5 kinds of protection. Temperature control fan stepless speed change. Widely used in applications such as bar DJ performances, conference presentations, wedding receptions, stage performances, and other events.

型号 Model	MA800	MA1000	MA1300	MA1600	MA1800	MA2000
8Ω 立体声功率 Stereo power	8Ω 800W*2	8Ω 1000W*2	8Ω 1300W*2	8Ω 1500W*2	8Ω 1800W*2	8Ω 2000W*2
4Ω 立体声功率 Stereo power	4Ω 1550W*2	4Ω 1800W*2	4Ω 2250W*2	4Ω 2550W*2	4Ω 2850W*2	4Ω 3250W*2
8Ω 桥接功率 Bridge power	8Ω 2260W	8Ω 2800W	8Ω 3600W	8Ω 4200W	8Ω 3800W	8Ω 5500W
输入灵敏度 Input sensitivity	0.775V/1V/1.44V	0.775V/1V/1.44V	0.775V/1V/1.44V	0.775V/1V/1.44V	8dBV/32dBV/26dBV	38dBV/32dBV/26dBV
输入阻抗 Input impedance	10K unbalanced, 20K balanced					
频率响应 Frequency response	20-20KHZ/± 1db6					
总谐波失真 THD	≤0.008%	≤0.008%	≤0.01%	≤0.01%	≤0.01%	≤0.01%
信噪比 SNR	≥ 104db	≥ 100db	≥ 97db	≥ 96db	≥ 96db	≥ 96db
阻尼系数 Damping coefficient	≥ 900@8 Ohms	≥ 1000@8 Ohms	≥ 900@8 Ohms	≥ 1000@8 Ohms	≥ 1000@8 Ohms	≥ 1000@8 Ohms
最大功耗 Maximum power consumption	1900W	2300W	2600W	2800W	3000W	3200W
尺寸 Size	(L*W*H)482*420*88mm					
重量 Net weight	12kg	13kg	14kg	17kg	18kg	19kg




主要特点

- * 强力双风扇散热
- * 多重保护功能
- * 支持多设备输入
- * 内置纯铜环形变压器

Product performance

- * Strong dual-fan heat dissipation
- * Multiple protection functions
- * Support for multi-device input
- * Built-in pure copper toroidal transformer

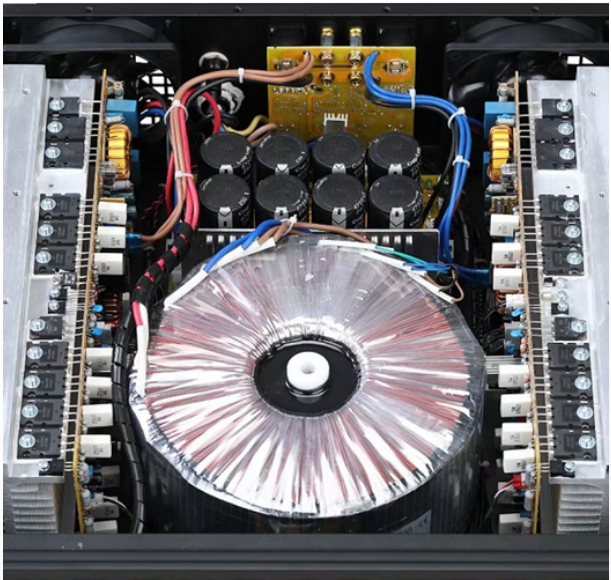

TD 系列是我公司打造的一款高品质功率放大器。具有超强的功率性能和超低的失真度；拥有完善的电子保护装置，极大地提升了音质；属于国内高端产品。广泛应用于酒吧DJ表演、会议展示、婚礼现场、舞台表演等场合。

TD series is a high quality power amplifier built by our company.Super power performance, ultra-low distortion;Perfect electronic protection device, greatly improved sound quality;Belongs to the domestic high-end products. Widely used in applications such as bar DJ performances, conference presentations, wedding receptions, stage performances, and other events.

型号 Model	TD-1300	TD-1500	TD-1800	TD-2000	TD-2500
8Ω 立体声功率 Stereo power	1300W*2	1500W*2	1800W*2	2000W*2	2500W*2
4Ω 立体声功率 Stereo power	1950W*2	2400W*2	2700W*2	3000W*2	3750W*2
8Ω 桥接功率 Bridge power	2600W	3200W	3600W	5000W	6250W
频率响应 Frequency response	20~20kHz(-0.5dB)	20~20kHz(-0.5dB)	20~20kHz(-0.5dB)	20~20kHz(-0.5dB)	20~20kHz(-0.5dB)
总谐波失真 THD	<0.1%20Hz-20KHz	<0.1%20Hz-20KHz	<0.05	<0.1%20Hz-20KHz	<0.1%20Hz-20KHz
信噪比 SNR	>103dB	>103dB	>104dB	>103dB	>103dB
阻尼系数 Damping coefficient	>400	>400	>600	>400	>400
分离度 Separation degree	>60dB	>60dB	>60dB	>60dB	>60dB
转换速率 Conversion rate	>13v/μs	>13v/μs	>13v/μs	>13v/μs	>13v/μs
输入灵敏度 Input sensitivity	32dB/1v/1.4v	32dB/1v/1.4v	32dB/1v/1.4v	32dB/1v/1.4v	32dB/1v/1.4v
输入阻抗 Input impedance	20k/10k	20k/10k	20k/10k	20k/10k	20k/10k
尺寸 Size	483x440x133	483x440x133mm	483x430x133mm	483x440x133mm	483x440x133mm

让音乐点亮生活

LET MUSIC LIGHT UP LIFE

广州市智泓电子有限公司

Aa1 Technology Electronic Co., Limited

电话 Phone: +8620-3473-9857; +8620-3473-9957

传真 Fax: +8620-3105-2198

邮箱 Email: info@aa1audio.com; tracyli@aa1audio.com

邮编 Postcode: 511483

地址: 广州市番禺区沙湾镇龙湾村龙古路22号之五

Address: No.22, Longgu road, Longwan, Shawan town, Panyu, Guangzhou, China

网址 Website: www.chordiosoundsystem.com www.aa1audio.com www.chordio-tech.com

