



上海万狐实业有限公司

Shanghai Foxygen Industrial Co., Ltd.

国家高新技术企业

追求品质让我们质量赢得客户

Company Name: Shanghai Foxygen Industrial Co., Ltd.

Operational Address: Songjiang District, Shanghai, China

Website: <https://foxygentech.com>

+86-15821951626 - Katherina Huang

+86-18317033075 - Melody Wang

+86-15900703866 - Lurita Yang



FX双头脚踏式高周波机 Treadle style with two heads of high-frequency



- 采用高Q值电子振荡管，输出稳定可靠
- 双道杆结构，进度高，操作灵活
- 时间预设，机械互锁，机头交替工作
- 采用高密度火花防止器，有效防止损模
- 杠杆肘节式传动加压，省力，压力均匀
- 优质进口元器件组装
- Using a high "Q" value vibration tube is used in this machine so it is stable and reliable in output
- With a structure of double guide rod, it is precise and flexible.
- Time can be pre-set up, and the circuit can Counter-action of two circuits, the head of machine work alternately.
- A high sensitive spark preventing gadget is installed in this machine, it can prevent effectively wearing mould.
- Biving pressure by a level elbow joint, it can save the strength and give even pressure.
- It is made of a whole set high-quality imported components

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-5000T	FX-8000T
POWER	高周波功率	5000W	8000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	8kVA	11KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T85	7T69
MAXPRESSUERE	最大压力	200kg	200kg
MAX GAP OF ELECTRODES	最大电极间隔	160~220mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	60mm	
SIZE OF PLAT	工作台面尺寸	350*700mm	
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
SIZE OF SHAPE	外形尺寸	1720*1100*1520mm	
NET WEIGHT	净重	330kg	350kg

FX双头油压式高周波机 Oil pressure style with two heads of high-frequency



- 采用高Q值电子振荡管，输出稳定可靠
- 双道杆结构，进度高，操作灵活
- 时间预设，机械互锁，机头交替工作
- 采用高密度火花防止器，有效防止损模
- 杠杆肘节式传动加压，省力，压力均匀
- 优质进口元器件组装
- Using a high "Q" value vibration tube is used in this machine, so it is stable and reliable in output.
- With a structure of double guide rod, it is precise and flexible.
- Time can be pre-set up, and the circuit can counter-action of two circuits, the head of machine work alternately.
- A high sensitive spark preventing gadget is installed in this machine, it can prevent effectively wearing mould.
- Biving pressure by a level elbow joint, it can save the strength and give even pressure.
- It is made of a whole set high-quality imported components

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-5000TY	FX-8000TY
POWER	高周波功率	5000W	8000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	9KVA	13KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T85RB	7T69RB
MAXPRESSUERE	最大压力	1000kg	
MAX GAP OF ELECTRODES	最大电极间隔	160~220mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	60mm	
SIZE OF PLAT	工作台面尺寸	350*700mm	
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
SIZE OF SHAPE	外形尺寸	2000*1070*2000mm	
NET WEIGHT	净重	400kg	450kg

FX双头气动式高周波机 Pneumatic style with two heads of high-frequency



- 采用高Q值振荡管，输出稳定可靠
- 气动装置，省时省力，一致性好，操作简便
- 程序预设，机械互锁，机头交替转换工作
- 采用高感度火花防止器，有效防止损模
- 高精度温度控制，保证焊接一致性
- 优质进口元器件组装
- Using a high "Q" value vibration tube is used in this machine, so it is stable and reliable in output.
- Its pneumatic fitting is good for saving time and strength with excellent coherence and easy to be operated.
- The program is pre-setting up, and the circuit can counter-action of two circuits, the head of the machine can
- Transfer work automatically.
- A high sensitive fire preventing gadget is adopted in this machine, it can prevent wearing effectively.
- The high precise temperature controlling can assure the coherence of welding.
- It is made of a whole set high-quality imported components.

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-5000TQ	FX-8000TQ
POWER	高周波功率	5000W	8000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	8kVA	11KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T85RB	7T69RB
MAXPRESSUERE	最大压力	350kg	450kg
MAX GAP OF ELECTRODES	最大电极间隔	160~220mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	60mm	
SIZE OF PLAT	工作台面尺寸	350*700mm	
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
SIZE OF SHAPE	外形尺寸	1720*1100*1580mm	
NET WEIGHT	净重	340kg	360kg

FX单头转盘式高周波机 DIAL style with single heads of high-frequency



- 高Q值电子振荡管，输出稳定可靠。
- 高灵敏度火花抑制，电路防止损坏模具。
- 转盘式结构，有效提高生产效率。
- 气缸顶出定位装置，转盘定位准确。
- 优质进口元器件组件。
- Using a high "Q" value be is installed in this machine, so it is stable and reliable in output.
- High sensitive spark depressing circuit is used for preventing mould damage.
- The dial style structure can improve the production effectively.
- The cylinder propping positioning gadget can make precise positioning of turntable.
- It is made of a whole set high-quality imported components

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-5000S	FX-8000S
POWER	高周波功率	5000W	8000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	8KVA	11KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T85RB	7T69RB
MAXPRESSUERE	最大压力	200kg	200kg
MAX GAP OF ELECTRODES	最大电极间隔	160~220mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	60mm	
SIZE OF PLAT	工作台面尺寸	350*700mm	
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
SIZE OF SHAPE	外形尺寸	1720*1100*1520mm	
NET WEIGHT	净重	330kg	350kg

▶ 单头高周波帆布熔接机 Single head high frequency canvas welding machine



特点：膜结构高周波焊机采用C字形设计，大空间压膜放料，简便优越。
用途：户外膜结构焊接、车棚顶棚焊接、充气游泳池、充气床、油囊、气膜、张拉膜、遮阳、帐篷、膜结构等。

Features:

Membrane structure of high-frequency welding machine using C-shaped design, large space film material, simple and superior.

Application range:

Outdoor membrane structure welding, roof welding, inflatable swimming pool, inflatable bed, oil sac, gas film, stretching film, sunshade, tent, membrane structure, etc.

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-12000F	FX-15000F
POWER	高周波功率	8000W	15000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	16KVA	18KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	3130RB	8T85RB
MAXPRESSUERE	最大压力	500kg	600kg
MAX GAP OF ELECTRODES	最大电极间隔	250mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	200mm	
SIZE OF PLAT	定盘尺寸	60*900mm	60*900mm
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
TYPE OF OPERATION	操作方式	全气动控制The whole pneumatic controlling	
SIZE OF SHAPE	外形尺寸	1000*750*1920mm	
NET WEIGHT	净重	800kg	1000kg

▶ FX双头气增压式高周波机 Vertical pneumatic style with two heads of high-frequency



- 采用高Q值振荡管，输出稳定可靠
- 气动装置，省时省力，一致性好，操作简便
- 程序预设，机械互锁，机头交替转换工作
- 采用高感度火花防止器，有效防止损模
- 高精度温度控制，保证焊接一致性
- 优质进口元器件组装

- Using a high "Q" value vibration tube is used in this machine, so it is stable and reliable in output.
- Its pneumatic fitting is good for saving time and strength with excellent coherence and easy to be operated.
- The program is pre-setting up, and the circuit can counter-action of two circuits, the head of the machine can transfer work automatically.
- A high sensitive fire preventing gadget is adopted in this machine, it can prevent wearing effectively.
- The high precise temperature controlling can assure the coherence of welding.
- It is made of a whole set high-quality imported components.

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-5000TQ	FX-8000TQ
POWER	高周波功率	5000W	8000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	8KVA	11KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T85RB	7T69RB
MAXPRESSUERE	最大压力	350kg	450kg
MAX GAP OF ELECTRODES	最大电极间隔	160~220mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	60mm	
SIZE OF PLAT	定盘尺寸	300*700mm	
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
SIZE OF SHAPE	外形尺寸	1720*1100*1580mm	
NET WEIGHT	净重	340kg	360kg

▶ FX高周波叠式同步熔断机

double-deck cutting and embossing machine



- 高Q值电子振荡管，输出稳定可靠。
- 高灵敏度火花抑制，电路防止损坏模具
- 滑台式结构，省时省力，操作便捷
- 机械式工作台面定位装置，定位准确
- 优质进口元器件组装

- Using a high "Q" value be is installed in this machine, so it is stable and reliable in output.
- High sensitive spark depressing circuit is used for preventing mould damage.
- With the movable table style structure, it can save time and atrength and easy to be operated.
- It is made of a whole set high-quality imported components

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-12000ZD	FX-15000ZD
POWER	高周波功率	12000W	15000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	16KVA	18KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	3130RB	8T85RB
MAXPRESSUERE	最大压力	48T	48T
MAX GAP OF ELECTRODES	最大电极间隔	250mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	200mm	
SIZE OF PLAT	定盘尺寸	500*600mm	500*600mm
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
TYPE OF OPERATION	操作方式	全气动控制The whole pneumatic controlling	
SIZE OF SHAPE	外形尺寸	1000*750*1920mm	
NET WEIGHT	净重	1500kg	1800kg

▶ FX软膜天花扣边条焊接机

strech ceiling high frequency welding machine



技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-5000RM
POWER	高周波功率	5000W
POWER SUPPLY	电源电压	380V/220V
ELETRONIC POWER	输入功率	8KVA
RECTIFIER	整流器	SILICON DIODE矽二极管
VIBRATIONAL TUBE	振荡管	7T85RB
MAXPRESSUERE	最大压力	350kg
MAX GAP OF ELECTRODES	最大电极间隔	250mm
SIZE OF ACCTIVE HORN	焊头活动尺寸	175mm
SIZE OF PLAT	定盘尺寸	400*600mm
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable
TIME CHANGE	时间调节	0~10S可调Adjustable
SIZE OF SHAPE	外形尺寸	1400*700*1750mm
NET WEIGHT	净重	420kg

- 双导轨推盘位置更精准，
- 加大号轴承，承受力更大，更稳，不易变形。
- 轴承数量8个减少了跨度，模具不会弯曲，使产品压痕一致性，更加美观
- 焊接线采用锯齿纹，软膜与扣边拉力效果更好
- 推盘上面拖盘采用pom塑胶板，不怕受潮，虫咬，不会变形，易打理清理。

- Double rail, push plate more accurate.
- Bigger size bearing, more steady, not easily deform.
- 8 bearings to made mould less damage, product indentation will more beautiful
- Sealing wire use saw-tooth, sealling effect more strict.
- Table use plastic board, forbid damp, insect-bite. Clean up easily.

FX软膜天花扣边条烫边机 stretch ceiling high frequency welding machine



- 双导轨推盘位置更精准，
- 加大号轴承，承受力更大，更稳，不易变形。
- 轴承数量8个减少了跨度，模具不会弯曲，使产品压痕一致性，更加美观
- 焊接线采用刷齿纹，软膜与扣边拉力效果更好
- 推盘上面拖盘采用pom塑胶板，不怕受潮，虫咬，不会变形，易打理清理。

- Double rail, push plate more accurate.
- Bigger size bearing, more steady, not easily deform.
- 8 bearings to made mould less damage, product indentation will more beautiful
- Sealing wire use saw-tooth, sealling effect more strict.
- Table use plastic board, forbid damp, insect-bite. Clean up easily.

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-5000RM
POWER	高周波功率	5000W
POWER SUPPLY	电源电压	380V/220V
ELETRONIC POWER	输入功率	8KVA
RECTIFIER	整流器	SILICON DIODE矽二极管
VIBRATIONAL TUBE	振荡管	7T85RB
MAXPRESSUERE	最大压力	350kg
MAX GAP OF ELECTRODES	最大电极间隔	250mm
SIZE OF ACCTIVE HORN	焊头活动尺寸	175mm
SIZE OF PLAT	定盘尺寸	400*600mm
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable
TIME CHANGE	时间调节	0~10S可调Adjustable
SIZE OF SHAPE	外形尺寸	1400*700*1750mm
NET WEIGHT	净重	420kg

FX同步滑台熔断高周波机 In-phase fusion break of high-frequency



- 高Q值电子振荡管，输出稳定可靠。
- 高灵敏度火花抑制，电路防止损坏模具
- 滑台式结构，省时省力，操作便捷
- 机械式工作台面定位装置，定位准确
- 优质进口元器件组装

- Using a high "Q" value be is installed in this machine, so it is stable and reliable in output.
- High sensitive spark depressing circuit is used for preventing mould damage.
- With the movable table style structure, it can save time and atrength and easy to be operated.
- It is made of a whole set high-quality imported components

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-8000W	FX-10KW
POWER	高周波功率	8000W	10000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	12KVA	12KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T69RB	E3069RB
MAXPRESSUERE	最大压力	15T	15T
MAX GAP OF ELECTRODES	最大电极间隔	150mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	60mm	
SIZE OF PLAT	压板尺寸	350*450mm	350*450mm
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
SIZE OF SHAPE	外形尺寸	2210*1470*2300mm	
NET WEIGHT	净重	880kg	1000kg

FX单头推盘式高周波机 Dial style with single heads of high-frequency



- 高Q值电子振荡管，输出稳定可靠。
- 高灵敏度火花抑制，电路防止损坏模具。
- 推盘式结构，省时省力，操作便捷。
- 机械式工作台面定位装置，定位准确。
- 优质进口元器件组装。

- Using a high "Q" value be is installed in this machine, so it is stable and reliable in output.
- High sensitive spark depressing circuit is used for preventing mould damage.
- With the movable table style structure, it can save time and strength and easy to be operated.
- With a double cylinder working table location fixing gadget, it can fixing location precisely
- It is made of a whole set high-quality imported components

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-8000A	FX-12000A
POWER	高周波功率	8000W	12000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	12KVA	16KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T69RB	3130RB
MAXPRESSUERE	最大压力	450kg	500kg
MAX GAP OF ELECTRODES	最大电极间隔	250mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	200mm	
SIZE OF PLAT	定盘尺寸	600*800mm	700*900mm
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
TYPE OF OPERATION	操作方式	全气动控制The whole pneumatic controlling	
SIZE OF SHAPE	外形尺寸	1000*750*1920mm	
NET WEIGHT	净重	500kg	800kg

FX单头圆盘式高周波机 Single Head Round plate type high frequency welding machine



- 高Q值电子振荡管，输出稳定可靠。
- 高灵敏度火花抑制，电路防止损坏模具。
- 圆盘式结构，三工位装模，有效提高生产效率。
- 气缸顶出定位装置，转盘定位准确。
- 优质进口元器件组装。

- Using a high "Q" value be is installed in this machine, so it is stable and reliable in output.
- High sensitive spark depressing circuit is used for preventing mould damage.
- The dial style structure can improve the production effectively.
- The cyinder propping positioning gadget can make precise positioning of tumtable.
- It is made of a whole set high-quality imported components

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-5000E	FX-8000E
POWER	高周波功率	5000W	8000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	8KVA	12KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T85RB	7T69RB
MAXPRESSUERE	最大压力	400kg	500kg
MAX GAP OF ELECTRODES	最大电极间隔	250mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	175mm	200mm
SIZE OF PLAT	压板尺寸	200*350mm	250*400mm
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
TYPE OF OPERATION	操作方式	全气动控制The whole pneumatic controlling	
SIZE OF SHAPE	外形尺寸	1000*660*1730mm	1000*720*1860mm
NET WEIGHT	净重	400kg	420kg

FX带机械手全自动转盘高周波熔断机 automatic rotating high frequency welding machine with manipulator



特点：本机器设计理念低能耗，HQ震荡回路设计，调整电力全机自动追踪装置由公司自行研发，使每一样产品连到一样的标准，比别种机器降低15-20%的电力。
用途：牙刷包装，吸塑包装，电子产品包装等

Features: lower energy consumption, HQ vibration loop, and adjustment of electric power full automatic tracking devices self developed by Hipower Company, so that all products can be produced in compliance with the Same standards, and the electric power is decreased by 15-20% compared To other machines.
Purpose: toothbrush packaging, vacuum plastic packaging and electronic Products packaging.

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-8000ZDX	FX-12000ZDX
POWER	高周波功率	8000W	12000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	12KVA	16KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T69RB	3130RB
MAXPRESSUERE	最大压力	15T	15T
MAX GAP OF ELECTRODES	最大电极间隔	250mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	200mm	
SIZE OF PLAT	定盘尺寸	300*500mm	300*500mm
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
TYPE OF OPERATION	操作方式	全气动控制The whole pneumatic controlling	
SIZE OF SHAPE	外形尺寸	1000*750*1920mm	
NET WEIGHT	净重	800kg	1000kg

单头自动转盘高周波熔断机 Single head automatic rotary table high frequency welding machine



特点：本机器设计理念低能耗，HQ震荡回路设计，调整电力全机自动追踪装置由公司自行研发，使每一样产品连到一样的标准，比别种机器降低15-20%的电力。
用途：牙刷包装，吸塑包装，电子产品包装等

Features: lower onergy consumption, HQ vibration loop, and adjustment of electric power full automatic tracking devices self developed by Hipower Company, so that all products can be produced in compliance with the Same standards, and the electric power is decreased by 15-20% compared To other machines.
Purpose: toothbrush packaging, vacuum plastic packaging and electronic Products packaging.

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-8000ZDX	FX-12000ZDX
POWER	高周波功率	8000W	12000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	12KVA	16KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T69RB	3130RB
MAXPRESSUERE	最大压力	450kg	500kg
MAX GAP OF ELECTRODES	最大电极间隔	250mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	200mm	
SIZE OF PLAT	定盘尺寸	300*500mm	300*500mm
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
TYPE OF OPERATION	操作方式	全气动控制The whole pneumatic controlling	
SIZE OF SHAPE	外形尺寸	1000*750*1920mm	
NET WEIGHT	净重	800kg	1000kg

FX单头龙门式高周波机 Moveable tablestyle with single heads of high-frequency




吹气玩具、雨衣雨具
任何PVC或PVC含量在10%以上之软硬胶熔接

Suchas:airblowingtoys,raincoat,umbrella,
Stationerylabel,mobileplasticsheath,shoetrademark,
Leatherbags,handbags,toothbrushpackage,carpet
Embossing,etc

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-25kA	FX-35kA
POWER	高周波功率	25000W	35000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	25KVA	38KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	8T25RA	8T87RB
MAXPRESSUERE	最大压力	2T	2T
NET WEIGHT	净重	2000kg	2500kg

双头跑步带高周波机 Running band forming machine

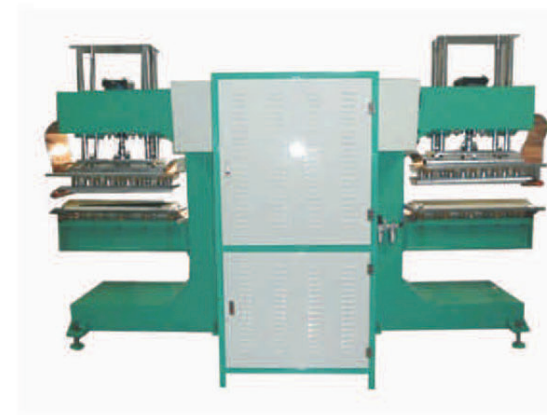

特点：保持接合平整原皮样。
用途：应用于各种后胶布的贴合与接驳

Features:to keep the original look of the raw leathers for flat joint.

Purpose:applicable to mounting and jointing of all kinds of thick adhesive plasters.

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-12kA	FX-15kA
POWER	高周波功率	8000W	15000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	16KVA	18KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	3130RB	8T85RB
MAXPRESSUERE	最大压力	500kg	600kg
MAX GAP OF ELECTRODES	最大电极间隔	250mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	200mm	
SIZE OF PLAT	压板尺寸	200*700mm	200*700mm
SCALE OF TEPRETURE	温控范围	30~300°C可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
TYPE OF OPERATION	操作方式	全气动控制The whole pneumatic controlling	
SIZE OF SHAPE	外形尺寸	1000*750*1920mm	
NET WEIGHT	净重	800kg	1000kg

FX输送带裙边挡块高周波熔接机 Conveyor stopper high frequency welding machine



特点：保持接合平整原皮样。

用途：应用于各种后胶布的贴合与接驳

Features:to keep the original look of the raw leathers for flat joint.

Purpose:applicable to mounting and jointing of all kinds of thick adhesive plasters.

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-8000A	FX-12kA
POWER	高周波功率	8000W	12000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	12KVA	16KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T69RB	3130RB
MAXPRESSUERE	最大压力	450kg	500kg
MAX GAP OF ELECTRODES	最大电极间隔	250mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	200mm	
SIZE OF PLAT	定盘尺寸	600*800mm	700*900mm
SCALE OF TEPRETURE	温控范围	30~300℃可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
TYPE OF OPERATION	操作方式	全气动控制 The whole pneumatic controlling	
SIZE OF SHAPE	外形尺寸	1000*750*1920mm	
NET WEIGHT	净重	500kg	800kg

FX单头工业皮带高周波熔接机 single head industrial belt high frequency welding machine



特点：保持接合平整原皮样。

用途：应用于各种后胶布的贴合与接驳

Features:to keep the original look of the raw leathers for flat joint.

Purpose:applicable to mounting and jointing of all kinds of thick adhesive plasters.

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-12kA	FX-15kA
POWER	高周波功率	8000W	15000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	16KVA	18KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	3130RB	8T85RB
MAXPRESSUERE	最大压力	500kg	600kg
MAX GAP OF ELECTRODES	最大电极间隔	250mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	200mm	
SIZE OF PLAT	压板尺寸	700*200mm	700*200mm
SCALE OF TEPRETURE	温控范围	30~300℃可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
TYPE OF OPERATION	操作方式	全气动控制 The whole pneumatic controlling	
SIZE OF SHAPE	外形尺寸	1000*750*1920mm	
NET WEIGHT	净重	800kg	1000kg

FX高周波自动拉料机 automatic pulling rolling high frequency machine



- 高Q值电子振荡管，输出稳定可靠。
- 高灵敏度火花抑制，电路防止损坏模具。
- 转盘式结构，有效提高生产效率。
- 气缸顶出定位装置，转盘定位准确。
- 优质进口元器件组件。

- Using a high "Q" value be is installed in this machine, so it is stable and reliable in output.
- High sensitive spark depressing circuit is used for preventing mould damage.
- The dial style structure can improve the production effectively.
- The cylinder propping positioning gadget can make precise positioning of tumtable.
- It is made of a whole set high-quality imported components

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-8000ZL	FX-12000ZL
POWER	高周波功率	8000W	12000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	12KVA	16KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	7T69RB	3130RB
MAXPRESSUERE	最大压力	450kg	500kg
MAX GAP OF ELECTRODES	最大电极间隔	250mm	
SIZE OF ACCTIVE HORN	焊头活动尺寸	200mm	
SIZE OF PLAT	定盘尺寸	600*800mm	700*900mm
SCALE OF TEPRETURE	温控范围	30~300℃可调Adjustable	
TIME CHANGE	时间调节	0~10S可调Adjustable	
TYPE OF OPERATION	操作方式	全气动控制 The whole pneumatic controlling	
SIZE OF SHAPE	外形尺寸	1000*750*1920mm	
NET WEIGHT	净重	500kg	800kg

FX单头龙门式高周波机 Moveable tablestyle with single heads of high-frequency



吹气玩具雨衣雨具

任何PVC或PVC含量在10%以上之软硬胶熔接

Shchas:airblowingtoys.raincoat,umbrella, Stationerylabel,mobileplasticsheath,shoetrademark. Leatherbags,handbags,toothbrushpackage,carpet Embossing,etc

PVCdual-sidedsuctionsealing,weldingor pVC,or Soft/hardplasticwith PVC contentof10%orabove, Genuineleather,fabricembossing,etc

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-50KA	FX-100KA
POWER	高周波功率	50000W	100000W
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	50KVA	100KVA
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	9T94A	9T94A
MAXPRESSUERE	最大压力	2T	3T
NET WEIGHT	净重	2000kg	2500kg

FX大功率超声波塑焊机 High power ultrasonic plastic welding machine



- 原装压电陶瓷换能器,输出稳定可靠.
- 直线导向轴承,精密微调装置.
- 焊头四角水平可调式结构,配有底板四角可调水平
- 日本皇牌钢变幅杆,持久耐用
- 调频及频率自动补偿电路
- 调试设备软启动电路,避免损坏模具
- Original packaging the piezoelectric ceramics transducer the
- Export is stabilized reliably
- The straight line guide bearing the precise matching device
- The horizontal zoom type structures of four comers allocate that the board four comers at
- Bottom can transfer the standard
- Japan huang paigang becomes a ware ,ang the horizontal zoom type structure of lasting
- Durable hom allocates that the board four comers at bottom can dive flatly
- Frequency modulation and the frequency automatic equalization circuit
- Debug the soft boot circuit of equipment and avoids damaging the mould

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-3215	FX-4215
OUTPUTPOWER	输出功率	3200W	4200W
FREQUENCY	频率	15KHz	
INPUTVOLTAGE	输入电压	220V	
COOLING SYSTEM	振头冷却系统	Wind coding风冷	
ROUTE HOURNEY	焊头行程	70MM	100MM
UIBRATION SYSTEM	振荡系统	自激式振荡线路Atuo~stimuiating	
OSCILLATION TIMER	输出时间	0.01-99s	
PRESS YSSTEM RNDF	气压	Pressure bound气压范围1-7bar	
WELDNG AREA	焊接面积	300	350
AIR COMPRESSOR	使用压缩机	2HP	
NET WEIGHT	净重	350KG	

FX20KHZ超声波塑焊机 Ultrasonic plastics welding machine



- 原装压电陶瓷换能器,输出稳定可靠.
- 直线导向轴承,精密微调装置.
- 焊头四角水平可调式结构,配有底板四角可调水平
- 日本皇牌钢变幅杆,持久耐用
- 调频及频率自动补偿电路
- 调试设备软启动电路,避免损坏模具
- Original packaging the piezoelectric ceramics transducer the
- Export is stabilized reliably
- The straight line guide bearing the precise matching device
- The horizontal zoom type structures of four comers allocate that the board four comers at
- Bottom can transfer the standard
- Japan huang paigang becomes a ware ,ang the horizontal zoom type structure of lasting
- Durable hom allocates that the board four comers at bottom can dive flatly
- Frequency modulation and the frequency automatic equalization circuit
- Debug the soft boot circuit of equipment and avoids damaging the mould

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-1020	FX-1220
OUTPUTPOWER	输出功率	1000W	1200W
FREQUENCY	频率	20KHz	
INPUTVOLTAGE	输入电压	220V	
COOLING SYSTEM	振头冷却系统	Wind coding风冷	
ROUTE HOURNEY	焊头行程	70MM	
UIBRATION SYSTEM	振荡系统	自激式振荡线路Atuo~stimuiating	
OSCILLATION TIMER	输出时间	0.01-99s	
PRESS YSSTEM RNDF	气压	Pressure bound气压范围1-7bar	
WELDNG AREA	焊接面积	80	90
AIR COMPRESSOR	使用压缩机	1HP	
NET WEIGHT	净重	110KG	

FX行走式高周波帆布熔接机 Walking Type Canvas High Frequency Welding Machine



特点:本机具有自动来回连续压线,熔接准,无明显压痕。
用途:车用帆布或广告电脑喷会布接驳。

Features:automatic shuttling ang continuous pressing,accurate in tusing
Without evident dent
Purpose:auto-purpose canvas orad computer canvas joining

技术规格 TECHNIQUE SPECIFICATIONS

MODEL	机型	FX-12KA	
POWER	高周波功率	12000W	
POWER SUPPLY	电源电压	380V	380V
ELETRONIC POWER	输入功率	16KVA	
RECTIFIER	整流器	SILICON DIODE矽二极管	
VIBRATIONAL TUBE	振荡管	3130RB	
MAXPRESSUERE	最大压力	1200kg	
NET WEIGHT	净重	1200kg	

公司荣誉 CERTIFICATION

