




Church lighting plays a vital role in enhancing the atmosphere during services and special events. It highlights architectural features like stained glass windows and altars, creating a spiritual ambiance. Uplighting and wall wash lights emphasize the church's grandeur, while follow spotlights focus on key moments. For modern services, moving head wash lights and LED par lights offer dynamic, customizable lighting effects. Laser lights and strobe effects can add excitement during festive occasions. Proper lighting elevates the sacred environment, providing both functional illumination and emotional depth to the ceremony.

Wash Moving Light

Moving head wash lights are ideal for creating a soft, warm atmosphere in the church. These lights offer adjustable color mixing and wide coverage, perfect for illuminating the altar or creating general ambient lighting. They can be controlled via DMX, allowing flexibility in lighting effects for weddings, mass services, and other ceremonies. The ability to change angles and colors makes them versatile for different church events.





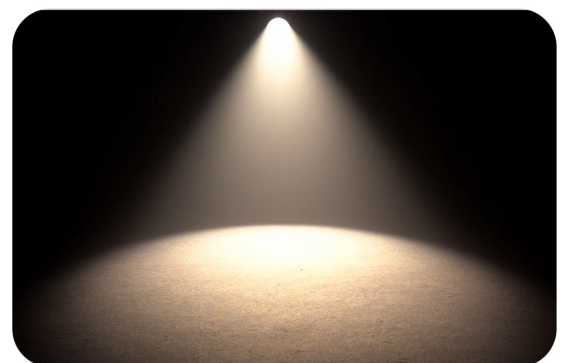

19 focusing head lights	<p>Input Voltage: AC90-240V, 50/60Hz Power consumption: 285W LED light source: 19x15W red, green, blue, white and mixed color leds DMX control channels: 16/24 DMX channels Operation Mode: DMX512, Aoturn, audio action, Strobe, stand-alone and master/slave, with a wealth of advanced built-in programs. Dimmer: 0-100% mechanical dimmer Beam Power: 15 degrees Zooms: 10-60 degrees Protection: IP20 indoor Materials: high temperature plastic + die alloy Packing Size: 46 * 26 * 40cm</p>	
3610W focus lenses	<p>Voltage: AC100V-240V, 50/60Hz Power: 450W Light source: 36x15W LED Controls: DMX512/master/slave/voice/self-walking Channel: 16CH Strobe: 1-25 beats per second Features: with focusing function, unlimited RGBW color mixing system and rainbow effect, can be automatically run through the external console control of 36 full-color LEDs Size: 450 * 340 * 380mm 1 mount 10.50 kg</p>	
150W Zoom Moving Light with Ring	<p>Voltage: AC100-240V Power: 150W Frequency: 50-60Hz LED: 1 x 120W RGBW 4in1 LED Ring: 36*0.3W RGB3in1 LED Channels: 20CH/36CH/144CH/20CH/EXTCH Control modes: DMX/master-slave/sound control/Auto, RDM Beam angle/zoom: 6.5°-50° Horizontal scan: 540° Vertical scan: 270° Strobe: 1-25 Hz Display: Color LCD screen Cooling system: High-speed temperature-controlled fan Product dimensions: 43*30*22 cm Net weight: 12kg</p>	
Mini 7x60W Bee Eye Moving Light with Ring	<p>Voltage: AC90-240V 50-60Hz Total Power: 460W Light Source: 7x60W RGBW4in1 LEDs CRI: ≥90 Color Temperature: 2800-8500K Ring: 43*0.2 RGB LEDs Strobe: 1-25 Hz strobe effect Dimming: 0-100% linear dimming Beam angle: Zoom 7-31° Control: DMX512, auto-run, sound control, RDM Channels: 21-30-42-58 ch Horizontal Scan: 540° * 16-bit Vertical Scan: 270° * 16-bit Display: Chinese and English display Effects: CTO, Wash, Beam, Zoom, Pixel Control, Rotating Flower Box Size: 53X36X30 cm Weight: 10kg</p>	
450W ZOOM Moving Light	<p>Voltage: AC100V-240V 50-60Hz Color temperature: 2550K-6700K Color temperature correction Service life: 50000 hours Color: Comes with 5 colors and white light (can be used for color rendering effects) Colors: Red, Yellow, Blue, Green, Rose Red Lens: High precision laminated optical lens Soft light effect: adjustable angle and size of the soft light spot Focusing: Linear focusing CTO function, linear color temperature adjustment Dimming: 1-100% linear adjustment Strobe: 0-25/75 CRI: 95 Number of channels: 12CH Control mode: Master-slave, Auto run, DMX512 Projection range: Pan540°, Tilt250°, with automatic calibration and positioning Spot angle: 5°-40° Number of motors: A total of 6 ultra quiet motors Appearance: High temperature resistant and flame-retardant plastic Protection level: IP20 Product size: 355*246*556mm Product weight: 12.0KG Flightcase (2 in 1): 70*43*84cm</p>	

Lighting effects



LED Par Light

LED par lights are often used for highlighting architectural features such as columns, walls, or the altar. They provide bright lighting with adjustable color temperatures, making them perfect for adjusting the mood of different services, from warm wedding ceremonies to solemn religious events. Their compact design allows for easy installation and versatility in placement.

18 LED Flat PAR		<p>Product name: 18 Straight-through Aluminum Parler lamps Input Voltage: AC90-240V 50-60Hz Power: 120W LED type: RGBW 4-in-1, RGBWA 5-in-1, RGBWA UV 6-in-1 Beam angles: 25°, 35°, 45° (optional) Control mode: DMX512, master-slave, Auto, sound DMX mode: 4/8/6/10CH Dimming: 0-100% linear dimming Strobe: 0-25 Hz Cooling system: fan cooling system Packing Size: 25 * 25 * 18cm Product weight: 3.5 kg/piece 4in1 : 53*27*39 cm</p>
24 LED Flat PAR		<p>Input Voltage: AC90-240V 50-60Hz Light Source: 24 * 10W RGBW 4in1, RGBWA 5in1, RGBWA + UV 6in1 Color: 16.7 million Control mode: DMX512, master-slave, Auto, Sound, with infrared remote control Channel: 4/8/ 5/9/6/10 DMX512 Auto mode: Strobe, Dimming, gradient, jump Dimming: 0-100% linear dimming Strobe: 0-25 Lens angles: 25°, 35°, 45° (optional) Display: 4-bit LED display Cooling system: built-in high-speed fan cooling Inner box size: 25X25X18 cm Packing Weight: 3.50 kg Inner box volume: ≈0.011 m³</p>
54 aluminum Par	 	<p>Input Voltage: AC90-240V 50-60Hz Total Power: 150W Light source: 54 * 3W RGB 3in1 LED, colorful monochrome (R12, G18, B18, W6) Color: 16.7 million Control mode: DMX512, master-slave, Auto, sound Channel: 3/7CH (full color 3-in-1), 4/8CH (RGBW monochrome) Auto mode: Strobe, Dimming, gradient, jump Lens angle: 45° Display: 4-bit LED display Cooling system: built-in high-speed fan cooling Inner box size: 25X25X36 cm Packing weight: 3.0 kg Inner box volume: ≈0.023 m³ Enclosure size: 6in179X63X38 cm Packing weight: ≈19.0 kg 6 pack an outer case volume: ≈0.16 m³</p>
7X10W Mini Par		<p>Product name: 7 pieces of cast aluminum mini handkerchief lamp Input Voltage: AC90-240V 50-60Hz Total Power: 80W Light Source: 7 * 12W RGBW 4in1, RGBWA 5in1, RGBWA + UV 6in1 Color: 16.7 million Control mode: DMX512, master-slave, Auto, sound Channel: 4/8/ 5/9/6/10 DMX512 Strobe, dimming, gradient, Slip Auto Mode: Lens angles: 25°, 35°, 45° (optional) Display: 4-bit LED display Cooling system: built-in high-speed fan cooling Inner box size: 17 * 17 * 27cm Packing Weight: 1.6 kg Inner case volume: 0.007 m³ CartonSize: 53.9*39*28.5 CM Gross weight: 8.65 kg</p>
New 18 aluminum Par		<p>Input voltage: AC90-240V 50-60Hz Total power: 150W Light source: 18 * 15w RGBW 4in1, RGBWA 5in1, RGBWA+UV 6in1 Color: 16.7 million Control mode: DMX512, Master-slave, Auto, Sound (also equipped with infrared remote control) Channel: 4/8/ 5/9/ 6/10 DMX512 channels Strobe, dimming, gradient and jump auto mode: Lens angles: 25°, 35°, 45° (optional) Display screen: 4-digit LED display screen Cooling system: Built in high-speed fan for cooling Product size: 27 * 24 * 19cm Net weight: 2.19 kg</p>

Lighting effects



Spot Light

Spotlights are used to focus attention on specific people or areas, such as the bride and groom or the altar. These lights provide a sharp, powerful beam that can follow movement, ensuring that key moments remain in the spotlight. Follow spots are ideal for weddings and special ceremonies where precision and focus are needed.

200W Profile Spotlight		<p>Input Voltage: AC100-240V, 50/60Hz Rated Power: 200W/300W Light Source: 200W/300W High Brightness LED Color Temperature: 3200K/5600K selectable, 2-in-1 Color Rendering Index: CRI>90 Lamp Life: 50,000 hours Dimming: 0%-100% linear dimming Optical Material: Glass lens Control mode: DMX512, Master/slave, Auto, Sound Protection Rating: IP20 Control Mode: Standard DMX512 signal, Self-run, Master/Slave Channel Quantity: 2 channels (monochromatic) / 4 channels (bichromatic) Product Dimensions: 35x27x65cm (LxWxH) Product Net Weight: 7kg</p>
250W/350W electronic Zoom spotlight With Barndoer		<p>Technical parameter Input Voltage: AC100-240V/50/60Hz Rated Power: 250W/350W Light source: Improved LED high brightness integrated lamp beads Source Power: 250W/350W Light Life: 5-100,000 hours Luminous flux: 3200K standard luminous flux: 5480lm/5900K standard luminous flux: 27600lm Light efficiency: 3200K standard light efficiency: 120lm/w/5600K standard light efficiency: 133lm/w Color Temperature: 3200K/5600K/3200K + 5600K/4-in-1 color (RGBW) optional Color rendering index: Ra >90 up to 95 Drive mode: constant current drive Dimming: 0-100% linear electronic dimming (16-bit no flicker dimming) Strobe: 1-20 Hz Lens: Glass Fresnel lens Spot Angle: 10-65° DMX512 electric zoom or manual potentiometer zoom adjustment Control: International standard DMX512 signal Control mode: 4CH channel (Zoom/Speed/dimming/stop/go) Operation: Color Display Control Menu Cooling system: Ultra-thin jet air-cooled copper tube cooling LAMP bead temperature: <math>45^{\circ}\text{C}</math> Lamp size: 470 * 270 * 280mm NET weight: 9.5 kg Packing size: 520 * 290 * 340mm (single set), weight: 11kg Package size: 530 * 300 * 710mm (two sets), weight: 23.5 kg FlightCase 4in1 : 63*27*19 cm weight: 60.8 kg</p>






Strobe Light

Strobe lights are typically used for special effects, particularly during celebratory or festive occasions like Easter, Christmas, or youth services. Their rapid flashing creates dramatic effects, adding excitement to church celebrations. When used in moderation, strobe lights can add a dynamic touch to events without compromising the sacred atmosphere.


Lighting effects

200W segment strobe light		<p>Input Voltage: AC100V-220V, 50-60Hz Control Mode: DMX512, Standalone, Master/Slave, Sound Active, with RDM Function Power: 200W LEDs: 48 segment with 768 RGB 3in1 LEDs + 8 segment with 96 white LEDs Channels: CH4, CH17, CH152 Dimming: 32 bit 0-100% Linear Dimming Features: 48-section running water gradient + strobe effect Strobe: 1-30Hz Color: RGB 11-color (indefinitely variable color mixing) + full white strip light Cooling: Heat sink + fan for strong air cooling Lifespan: Over 50,000 hours Product Dimensions: 44.5*28.5*21.5cm Net Weight: 2.6kg Packaging Dimensions: 44*27*11cm, Gross Weight: 3.0kg</p>
1000W strobe light		<p>Power: 1000W Voltage: AC90-240V, 50/60Hz Light color: red, green, blue 8-segment control Chassis: aluminum alloy Light source: 9605050 RGB leds Color Temperature: 6500-7500K Lamp Life: up to 50,000 hours Strobe: 1-30Hz regular strobe, random strobe, burst strobe Channels: 8 Input/output: 3 or 5 stiches Control mode: DMX/autoprogram/Master/Slave/Voice control Dimming: 0-100% linear dimming Lamp size: 42 * 24 * 14cm net weight: 5.0 kg Inner box size: 49 * 27 * 20cm weight: 5.9 kg Pack 1: 51 * 29 * 43 cm weight: 11.8 kg</p>
3000W strobe light		<p>Product name: 3000W strobe lamp Input Voltage: AC90-240V 50/60Hz Light Source: 228X3W White LED (strobe)54X0.2 W RGB LED (backlight) array Color: 8 bits for each color plus 8 bits for dimming Control mode: DMX512, master-slave, Auto. Channels: 3/4/14 Strobe: light beam strobe with variable flash rate, flash duration and flash intensity Programming mode: brightness adjustment, random flicker, flash effect, spike effect Display: monochrome backlit LED display Cooling system: built-in high-speed fan cooling Inner box size: 54x32x20.5 cm</p>
12 head-shaking strobe lights		<p>Product name: 12 head-shaking lamp strobe light Input Voltage: AC90-240V 50/60Hz Power: 400W Light source: 864led x 0.5 W RGB + cold white 96LED + 1W Control mode: DMX512, Auto, master-slave, Sound, RDM Channels: 8/20/22ch Section Control: RGB 12, cold white 12 Dimming: 32 bit 0-100% linear dimming Vertical Angle: y-axis 270° Features: Flash, Dye, head shake Operating Temperature: -30 °C-50 °C Frequency: 1-30 Hz Appearance: metal black Connection: DMX512 input/output/power input/output. Protection: IP20 Product size: 494 * 246 * 100mm Net Weight: 5.86 kg/1 pcs Size of two-pack case: 56 * 38 * 44cm Weight: 24.8 kg</p>
16+12 Strobe Moving light IP65		<p>Input Voltage: AC100-240V - 50/60Hz Power: 1000W Strobe LED Type: 768 5050-0.5 W RGB 3in1 leds 16 segments individually controllable Strobe LED Type: 76 3535-5W 6500K LED, 12 segments Y axis (degrees): 185° Control mode: 11-14-17-23-62-68 ch DMX Display: liquid crystal display with Touchscreen button, screen lock Protocols: DMX-512, RDM Cooling: Temperature Control, overheat protection Waterproof rating: IP65 Signal Connection: Sertronic365 Input/output power input: XLR 3 or 3-pin Sertronic PowerCON TRUE1 input/output Control mode: standard DMX512, RDM Signal Protocol, with four dimming mode built-in multiple effects program, sound, Auto, voice control effects Size: 56 * 33 * 23cm weight: 18kg</p>
IP65 48+12 segments Control strobe		<p>Voltage: AC 110-240V ±10%, 50-60Hz Power: 500W Power supply: 28V Color temperature: White light 6500-7500K LED model: RGB 0.2W + 768 pcs, W 2W + 96 pcs Light color: RGB + WW Lifespan: >50,000 hours Dimming: 0-100% linear adjustment Feature: RGB 48 individually controllable segments, W 12 individually controllable segments LED count: RGB 768 pcs, W 96 pcs Actual power consumption: 400W Strobe: 1-30Hz, regular strobe Control modes: DMX512, RDM, master/slave mode, color chase Channels: 4/18/156 ch Inbox: 59*37*17 cm Weight: 9.5kg 2in1 Box: 61*39*38 cm Weight: 20kg</p>

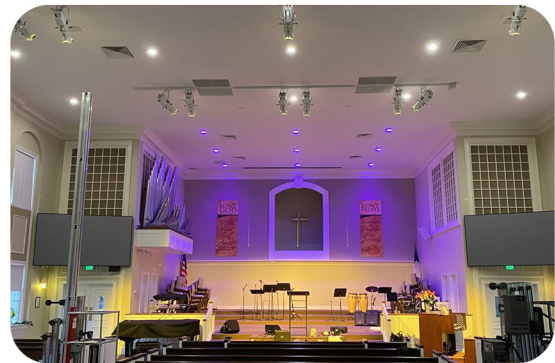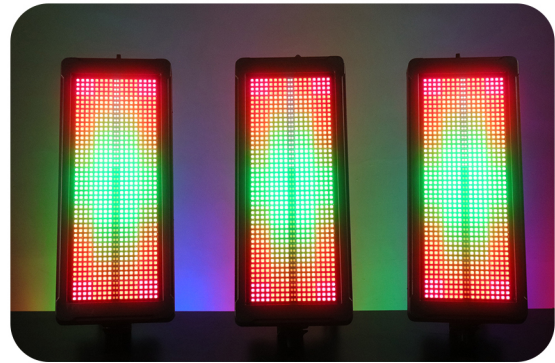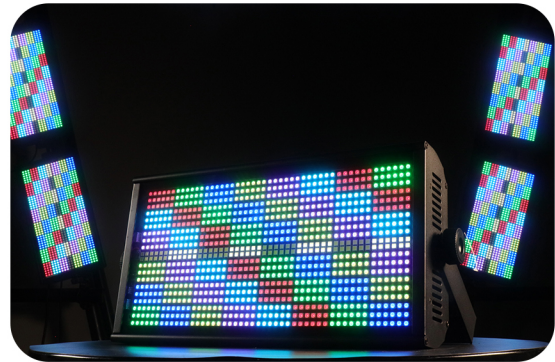

Gobo Light







Gobo projectors are used to project patterns or symbols, such as crosses, scripture, or religious icons, onto walls or the floor. This lighting effect is especially popular during major events like Christmas or Easter services, as well as weddings. The gobo projection adds artistic elements and enhances the spiritual ambiance of the church.

500W CMY CTO BSW 3in1 Moving light	<p>Input Voltage: AC110V-240V/50-60Hz Power: 500W Light Source Specifications: 400W white light LED module Color rendering: >75 Luminous: 5m 100000lm Colour Temperature: 8000K Colour Wheel: 8 colours + White Color Gobo: 8 gobos + blank, 8 rotating gobos Control: DMX512, Master/Slave, Sound and Auto, RDM Channel: 25 Channel Prism: 3-facet prism and 8-facet prism Dimming: 0-100% linear dimming Beam Angle: 3-45° zooming & Electronic Focusing Pan scan: 540° (60Hz) electric correction Tilt scan: 270° (160Hz) electric correction Independent CMY & CTO Electronic temperature-controlled overheat protection system Display: LED display Button+Touch mode IP level: IP20 Box size: 75*36*46 cm Weight: 25kg Flight Case: 2in1: 75*42*90 cm Weight: 75kg</p>	
------------------------------------	---	---



Wall Wash Light

LED wall wash lights are used to evenly illuminate large surfaces, such as walls or altars, creating a soft wash of light. These lights are ideal for highlighting intricate architectural details or religious artwork in the church. With energy-efficient LED technology, these lights provide a cost-effective solution for large-scale lighting coverage.

<p>18 bar lights</p>		<p>Input Voltage: AC90-240V 50-60Hz Light Source: 18 * 18W RGBWA + UV 6in1 LED Color: 16.7 million Control mode: DMX512, master-slave, Auto, Sound Normal Channel: 4/8, 5/9,6/10 DMX512 Pixel Control Channel:4/8/7/2, 5/9/9/0, 6/10/10/8 Auto mode: Strobe, Dimming, gradient, jump, Flash, Rainbow Lens angle: 15° Display: 4-bit LED display Cooling system: built-in high-speed cooling fan Inner box size: 104X13X19cm Packing weight: ≈5.0 kg Inner box volume: ≈0.026 m³ Enclosure size 4in1:106X28X41cm Packing weight: ≈21.0 kg 4 pack an outer case volume: ≈0.122 m³</p>
<p>18 UV bar lights</p>		<p>Product name: 18 UV bar lights Voltage/Frequency: 100-240V 50/60Hz UV wavelength: 380-420 nm Control mode: direct connection Light Source: 18 * 3w UV LED Power Cont: 1M Case: aluminum Power Plug: default European plug (Beauty Plug, plug, Australian plug) Lamp Size: 95.5 * 5 * 4.5 cm net weight: 0.75 kg Inner Box: 104 * 6.5 * 6cm gross weight: 1.0 kg (no inner box)20 pack one carton size: 106 * 28 * 33 cm gross weight: 22.50 kg (with inner box)20 pack one carton size: 106 * 33 * 27cm gross weight: 24.6 kg</p>
<p>48 double-row bar lights</p>		<p>Power supply: AC90-240V 50Hz/60Hz Rated Power: 100W Case material: aluminum profile Light source: 48*3W LED beads Color: purple, RGB Wavelength: 395-405nm Luminous Flux: 1.2-2.0 m Lifetime: more than 3,000 hours Suitable places: bars, discos, dance halls, KTV private rooms, family parties, etc. Power Connection: Power Cord Signal Connection: Signal Input/output Control channel: 7 DMX 512 signal channels Control mode: DMX 512 signal control, Sound, Auto, Strobe and master-slave mode, wireless remote control Cooling system: intelligent fan control cooling Working Environment: indoor Packaging: cartons Product size: 100 * 7.5 * 7cm Net Weight: 3.7 kg Package size: 104 * 13 * 19 cm Gross weight: 4.2 kg</p>
<p>10x30W RGBW COB Bar Light</p>		<p>Voltage: AC 90-240V, 50Hz/60Hz Certified Lifespan: 50,000 hours Total Light Power: 150 W Light Source Specification: 10x30W RGBW COB Colors: Red, green, blue, white Angles: 15°, 25°, 45°, 60° (optional) Lens Options: Frosted Lens or Clear Lens Electronic Strobe: 0.3-25 times/second Dimming: Electronic dimming with 0-100% linear adjustment Control Modes: 11/43 ch DMX512 protocol, RDM, Pixel Control Control Interface: DMX512 interface (3-pin/optional 5-pin), power cord handle socket Display Function: 0.96-inch LCD touch screen, bilingual menu in Chinese and English, sensor fault display, temperature display Installation Methods: Horizontal suspension using an Omega bracket; Horizontal installation on the floor using a tilting bracket with quick lock; Installation on the floor using a base plate; Vertical installation using a vertical adapter for vertical suspension. Split Connection: Structural connection with two quick-release pins Protection Level: IP22 Lighting Packaging: Flight Case or Cardboard box Net Weight: 9.0 kg Product Size: 952x80x106 mm</p>
<p>18x18W RGBWA+UV Bar Light</p>		<p>Voltage: AC 90-240V, 50Hz/60Hz Certified Lifespan: 50,000 hours Total Light Power: 150 W Light Source Specification: 18x18W RGBWA+UV 6-in-1 Colors: Red, green, blue, white, amber, UV Angles: 15°, 25°, 45°, 60° (optional) Lens Options: Frosted Lens or Clear Lens Electronic Strobe: 0.3-25 times/second Dimming: Electronic dimming with 0-100% linear adjustment Control Modes: 6/11/108/119 ch DMX512 protocol, RDM, Pixel Control Control Interface: DMX512 interface (3-pin/optional 5-pin), power cord handle socket Display Function: 4-bit LED Display Installation Methods: Horizontal suspension using an Omega bracket; Horizontal installation on the floor using a tilting bracket with quick lock; Installation on the floor using a base plate; Vertical installation using a vertical adapter for vertical suspension. Split Connection: Structural connection with two quick-release pins Protection Level: IP22 Lighting Packaging: Flight Case or Cardboard box Net Weight: 9.0 kg Product Dimensions: 952x80x106 mm</p>
<p>Sunstrip 10x50W Bar Light</p>		<p>Voltage: AC220v 50/60Hz Power: 450W Light source: 10pcs 50w Osram Halopar 16, GU10 25W/50W 35° (2000 hr, Beam angle: 10°) Colour Temp.: 2800K Lifetime/H: 2000 Socket: GU10 Beam angle ≈ 35° Control protocol: DMX512, RDM DMX channels: 1CH, 2CH, 3CH, 5CH, 10CH Software Upgrade: via DMX connection Signal connection: 3-pin XLR Power socket: blue and white Protection: IP20 Accessories: Mounting/Floor brackets (included) Minimum distance from flammable surfaces: 0.5m Minimum distance to lighted object: 0.8m Dimension/weight: 104x13x15 cm/5.7kg</p>

Lighting effects

