

**Features:**

- Isolated mounting base 3000V~
- Solder joint technology with increased power cycling capability
- Space and weight saving

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

V_{DRM} , V_{RRM}	Type & Outline		
800V	MFC160-08-229H3	MFC160-08-229H3B	
1000V	MFC160-10-229H3	MFC160-10-229H3B	
1200V	MFC160-12-229H3	MFC160-12-229H3B	
1400V	MFC160-14-229H3	MFC160-14-229H3B	
1600V	MFC160-16-229H3	MFC160-16-229H3B	
1800V	MFC160-18-229H3	MFC160-18-229H3B	

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_J (°C)	VALUE			UNIT	
				Min	Type	Max		
$I_{T(AV)}$	Mean on-state current		125			160	A	
$I_{T(RMS)}$	RMS on-state current	180° half sine wave 50Hz Single side cooled, $T_c=85^\circ C$	125			251	A	
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			40	mA	
I_{TSM}	Surge on-state current	10ms half sine wave	125			3.8	kA	
I^2t	I^2t for fusing coordination	$V_R=60\%V_{RRM}$				72.2	$A^2s \times 10^3$	
V_{TO}	Threshold voltage		125			0.85	V	
r_T	On-state slope resistance					1.50	mΩ	
V_{TM}	Peak on-state voltage	$I_{TM}=480A$	25			1.80	V	
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=67\%V_{DRM}$	125			1000	V/μs	
di/dt	Critical rate of rise of on-state current	Gate source 1.5A $t_r \leq 0.5\mu s$ Repetitive	125			200	A/μs	
I_{GT}	Gate trigger current		25	30		200	mA	
V_{GT}	Gate trigger voltage			0.6		2.5	V	
I_H	Holding current	$V_A=12V, I_A=1A$		10		250	mA	
I_L	Latching current					1000	mA	
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125			0.2	V	
$R_{th(j-c)}$	Thermal resistance Junction to case	Single side cooled per chip				0.17	°C /W	
$R_{th(c-h)}$	Thermal resistance case to heatsink	Single side cooled per chip				0.08	°C /W	
V_{iso}	Isolation voltage	50Hz, R.M.S, $t=1min, I_{iso}:1mA$ (MAX)	3000				V	
F_m	Terminal connection torque(M6)			2.5		4.0	N·m	
	Mounting torque(M6)			4.5		6.0	N·m	
T_{vj}	Junction temperature			-40		125	°C	
T_{stg}	Stored temperature			-40		125	°C	
W_t	Weight				165		g	
Outline	229H3/229H3B							

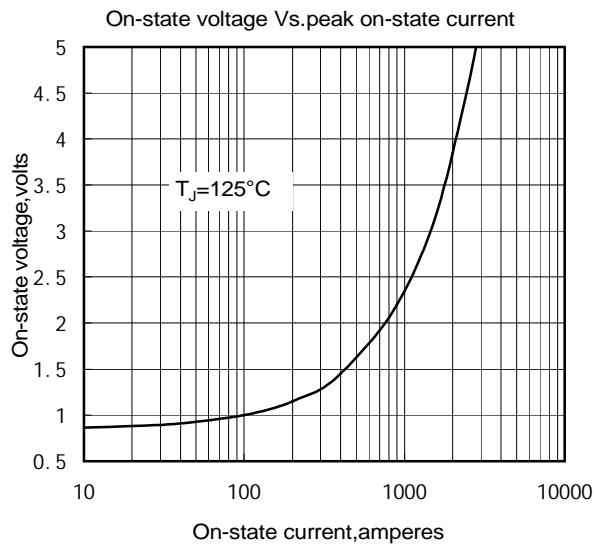


Fig1

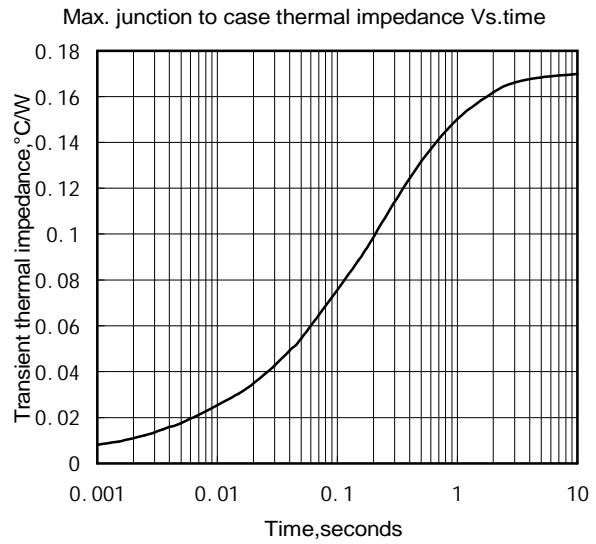


Fig2

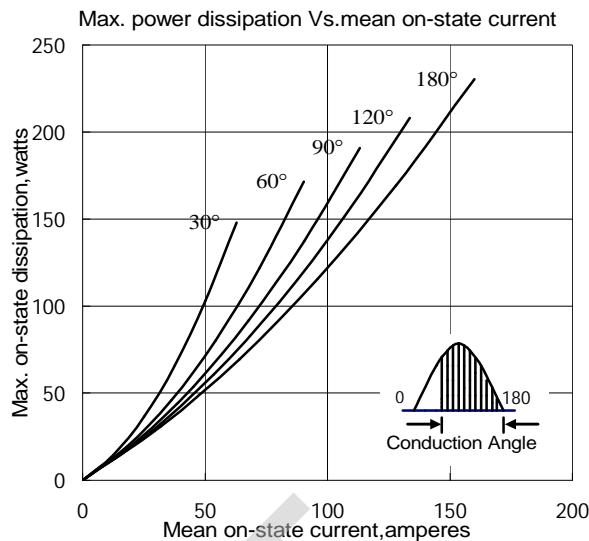


Fig3

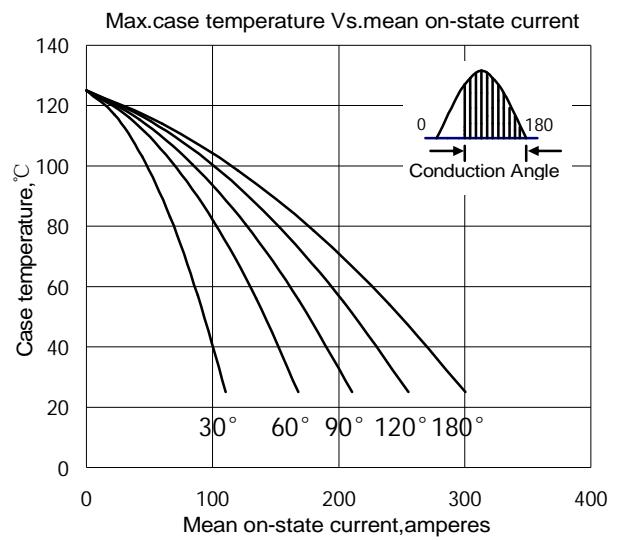


Fig4

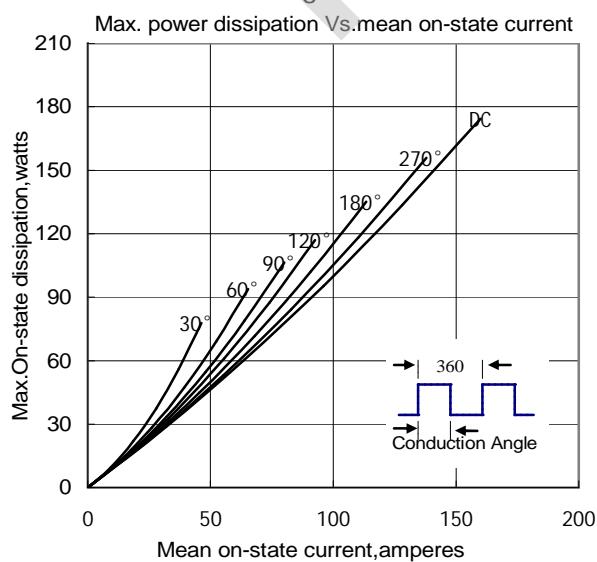


Fig5

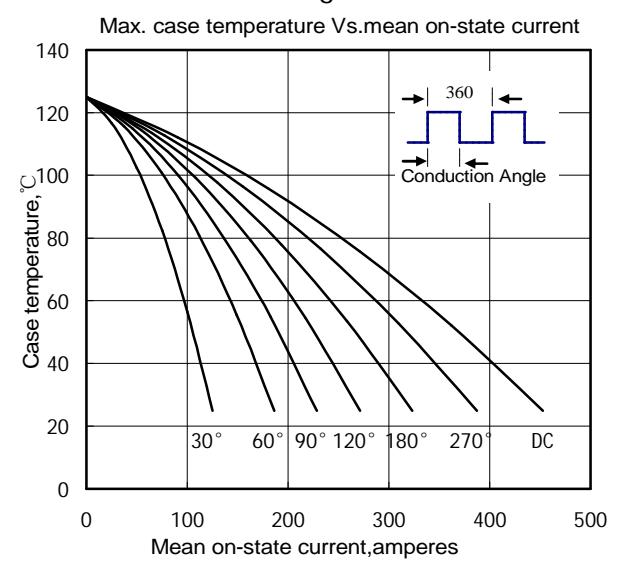


Fig6

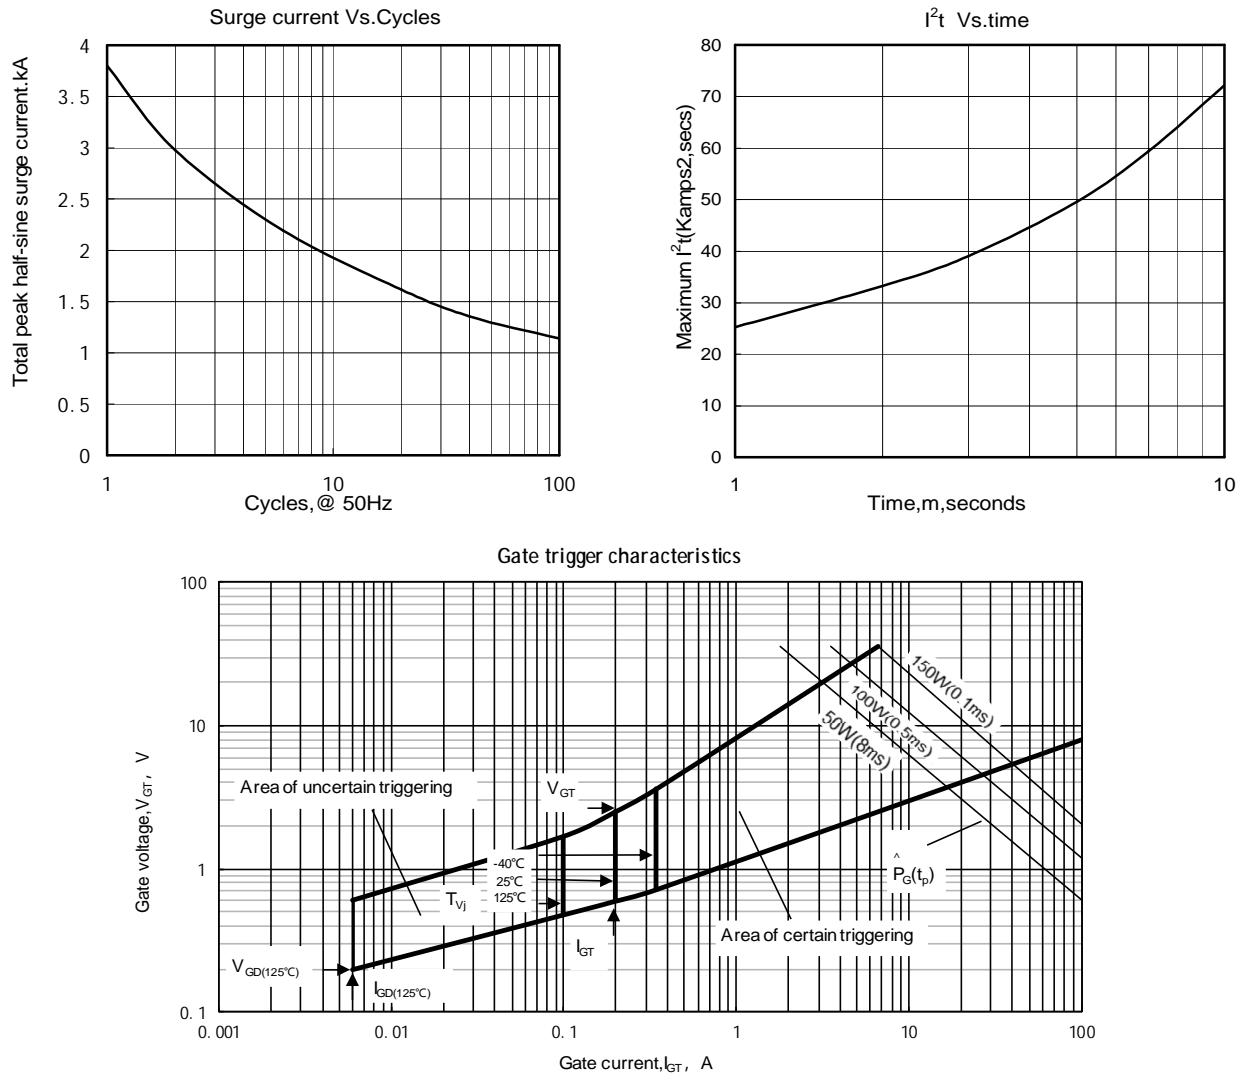
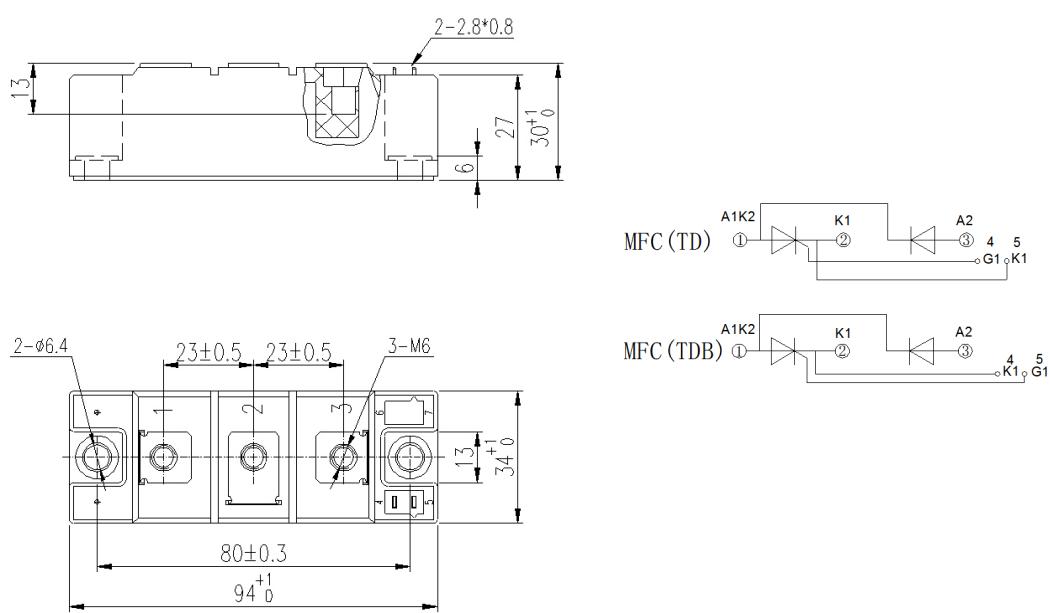


Fig.9

Outline:Unmarked dimensional tolerance: $\pm 0.5\text{mm}$

TECHSEM reserves the right to change specifications without notice.