



**Features**

- n Low forward voltage drop
- n Soft recovery
- n Hermetic metal cases with ceramic insulators

**Typical Applications**

- n Inverters and choppers
- n Motor control
- n Snubber and free-wheeling diodes

<b>Part No.H76ZYG-ZT73dT</b>		
<b>I<sub>F(AV)</sub></b>	<b>2200A</b>	
<b>V<sub>RRM</sub></b>	<b>4000V</b>	<b>4200V</b>
	<b>4500V</b>	

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T <sub>j</sub> (°C)	VALUE			UNIT
					Min	Type	Max	
I <sub>F(AV)</sub>	Mean forward current	180° half sine wave 50Hz Double side cooled,	T <sub>sink</sub> =55°C	125			2200	A
I <sub>RRM</sub>	Repetitive peak current	at V <sub>RRM</sub>		125			240	mA
I <sub>FSM</sub>	Surge forward current	10ms half sine wave		125			23	kA
I <sup>2</sup> t	I <sup>2</sup> t for fusing coordination	V <sub>R</sub> =0.6V <sub>RRM</sub>					2645	A <sup>2</sup> s*10 <sup>3</sup>
V <sub>FO</sub>	Threshold voltage			125			1.65	V
r <sub>F</sub>	Forward slope resistance						0.26	mΩ
V <sub>FM</sub>	Peak forward voltage	@I <sub>FM</sub> =3000A,	F=40kN	25			2.80	V
		@I <sub>FM</sub> =5000A		125			2.98	
V <sub>FRM</sub>	Maximum forward recovery voltage	di/dt=1000A/μs		125			80	V
				25			40	V
I <sub>rm</sub>	Reverse recovery current			125		400		A
t <sub>rr</sub>	Reverse recovery time	IFM=2000A, tp=4000μs, -di/dt=60A/μs, VR=50V				8.0		μs
Q <sub>rr</sub>	Recovery charge					2000		μC
R <sub>th(j-c)</sub>	Thermal resistance Junction to case	At 1800 sine, double side cooled Clamping force40kN					0.010	°C /W
R <sub>th(c-h)</sub>	Thermal resistance case to heat sink						0.003	
F <sub>m</sub>	Mounting force				35		47	kN
T <sub>jop</sub>	Operating temperature range				-40		125	°C
T <sub>stg</sub>	Stored temperature				-40		150	°C
W <sub>t</sub>	Weight					1460		g
Outline	ZT73dT							

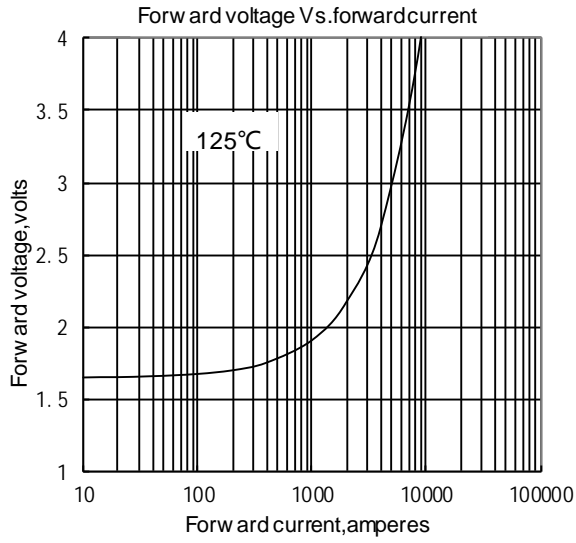


Fig.1

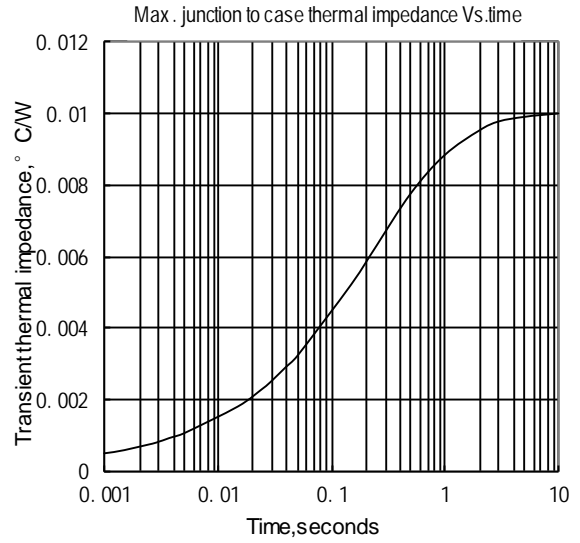


Fig.2

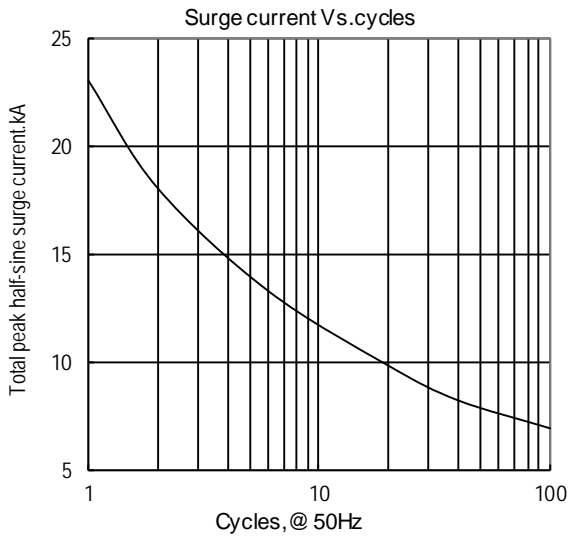


Fig.3

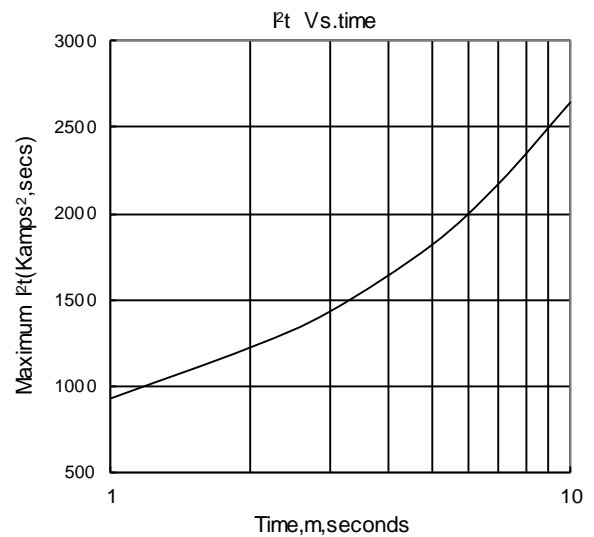


Fig.4

Outline:

