**瑞安市木森机械有限公司**
地址：瑞安市南滨街道林郑路12-A号
销售热线：13967780382
电话：0577-65591142
E-mail: Evawong@aliyun.com
WWW.MOSUNMACHINE.COM

**RUIAN MOSUN MACHINERY CO.,LTD**
Add:12-A Lingzheng Road Linyang, Nabin Street,
Ruian City, Zhejiang,China
Mobile: +86-13967780382
Tel: +86-577-65591142
E-mail: Evawong@aliyun.com
WWW.MOSUNMACHINE.COM

30+
PRODUCT
BROCHURE

# 烫金机
# HOT FOIL STAMPING MACHINE
# 压痕模切机
# DIE CUTTING AND CREASING MACHINE
# SERIES PRODUCT

# MSTL-930/1080C

## Vertical Automatic Hot Foil Stamping and Die-cutting Machine

## 立式全自动烫金模切机

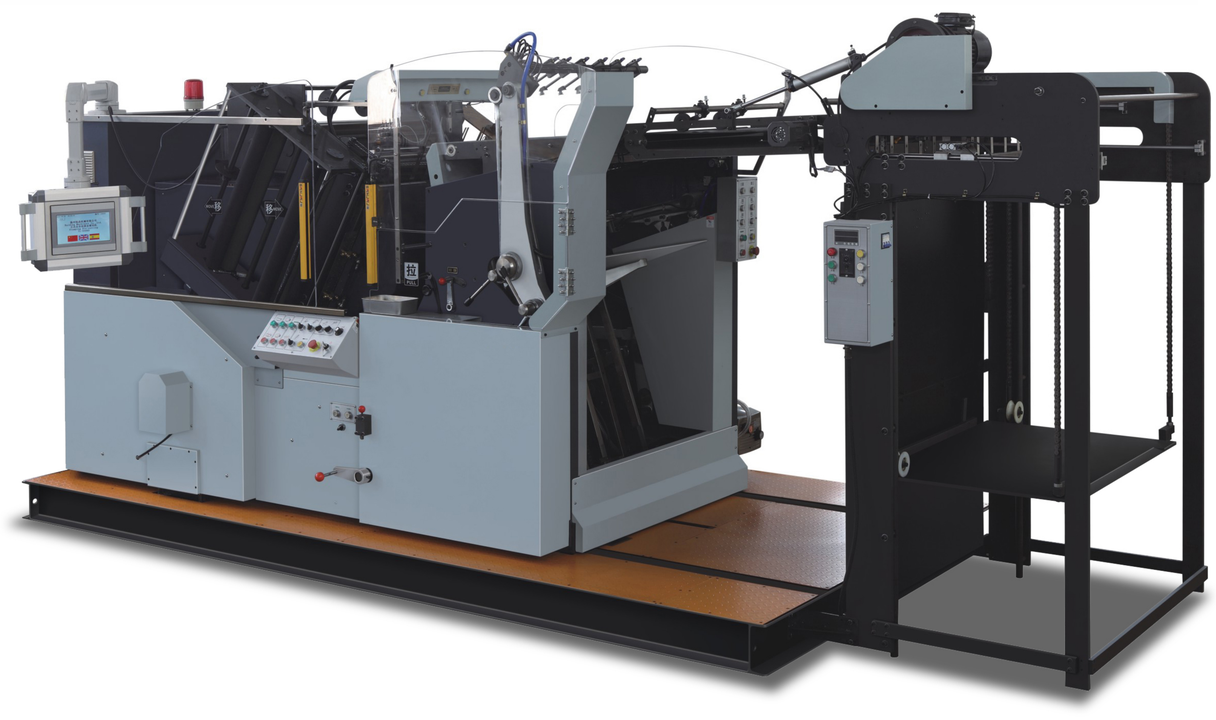

# PRODUCT OVERVIEW/产品概述

MSTL-930/1080C vertical automatic hot foil stampig die-cutting machine is designed for meet the domestic of foreign customers hot foil stamping, die-cutting, embossing indentation process.
MSTL-930/1080C has the advantages of simple opeation, accurate positioning, safe and reliable, low investment and high return.lt is the ideal equipment for small and medium-sized enterprises to make high-grade and exquisite small-volume printed materials.
MSTL-930/1080C is composed of four parts: main motor, hot foil stamping, auto feeder and electric equip.The working process of the main engine is driven by the crankshaft connecting rod mechanism for the reciprocating motion and the pressure adjusting mechanism with the completion. ln the host, the installation of hot foil stamping mechanism and automatic feeder after the connection, you can perform automatic feeding - die-cutting/ hot foil stamping - peel - the collection of the work cycle.
Electric control box uses advanced PLC control sysem,the main components provided by the famous foreign companies including stamping foil action by four groups of servo motor control.

MSTL-930/1080C 立式自动烫印模切机是为了适应国内外客户的烫印、模切、压凸、压痕工艺而设计的。综合了国内外先进的技术而自主设计的。
MSTL-930/1080C 具有操作简单、定位精确、安全可靠及低投资，高回报的优点，是中小企业制作高档、精美的小批量印品的理想设备。
MSTL-930/1080C 自动烫印模切机由主机、自动输纸机构、烫印机构及电气控制等四大部分组成。主机的作业过程是由曲轴连杆机构带动压架作往复运动和压力调整机构共同完成的。在主机上，安装烫印机构并与自动输纸机构联接后，则能执行自动输纸模切/烫金-剥离-收纸的工作循环，
电器控制箱采用了先进的PLC控制系统，其主要元件由国外著名公司提供，其中烫金拉箔动作，由四组伺服电机控制。

## 技术参数 Main Technical Parameters

| 型号 | Model | MSTL-930C | MSTL-1080C |
|---|---|---|---|
| 最大纸张幅面 | Max Sheet Size | 930x660mm | 1080x780mm |
| 最小纸张幅面 | Min Sheet Size | 300x300mm | 350x350mm |
| 输纸堆高度 | Max Feeder Pile Height | 750mm | 750mm |
| 收纸堆高度 | Max Delivery Pile Height | 1500mm | 1600mm |
| 最大工作压力 | Max Working Pressure | 160T | 200T |
| 总峰值功率 | Max Peak Power | 18kw | 20kw |
| 正常工作功率 | Steady-statePower | 9kw | 10kw |
| 气泵排气量 | Air Flow Rate | 40m3/h | 40m³/h |
| 纸板适用范围 | Shet Thickness | 120-200gsm | 120-2000gsm |
| 机器最高速度 | Speed | 1500-2500pcs/h | 1500-2000pcs/h |
| 机器重量 | Weight | 7800kg | 9300kg |
| 机器噪音 | Noise | ＜77db | ＜77db |
| 电热板功率 | Heating Plate Power | 10kw | 12kw |
| 电热板区域 | Heating Zones | 4 | 6 |
| 机器外形尺寸 | Dimension | 5200x2100x2300mm | 5300x2270x2280mm |
| 纵向电化铝走箔轴数 | Vertical Foil Axle | 2 rollers | 2 rollers |
| 横向电化铝走箔轴数 | Horizontal Foil Axle | 2 rollers | 2 rollers |

本公司有权保留对机器技术参数的修改，不另通知。
Company has the right to modify the machine parameters without further notice.

# MSTL-780/930/1080

## Vertical Automatic Hot Foil Stamping and Die-cutting Machine

## 立式全自动烫金模切机

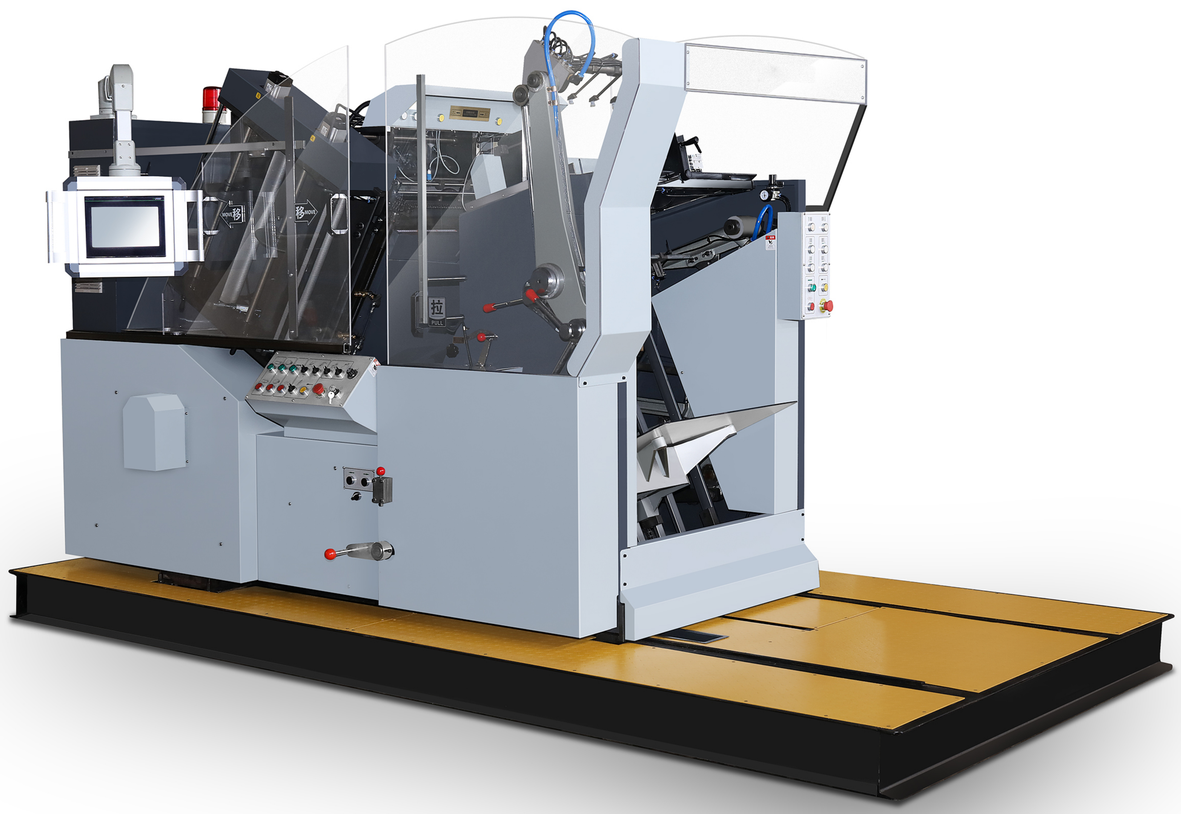

# PRODUCT OVERVIEW/产品概述

MSTL-780/920/1080 vertical automatic hot foil stamping die-cutting machine is designed for meet the domestic of foreign customers hot stamping, die-cutting,embossing, indentation process
MSTL-780/920/1080 has the advantages of simple operation, accurate positioning, safe and reliable, low investment and high return. It is the ideal equipment for small and medium-sized enterprises to make high-grade and exguisite small-volume printed materials.
MSTL-780/920/1080 is composed of four parts:main motor,hot foil stamping,auto feeder and electric equip.
The working processof the main engine is driven by the crankshaft connecting rod mechanism for the reciprocating motion and the pressureadiusting mechanism with the completion. in the host, the installation of hot foil stamping mechanism and automatic feederafter the connection, you can perform automatic feeding - die-cuting/hot foil stamping - peel - the collection of the workcycle.
Electric control box uses advanced PLC control system, the main components provided by the famous foreign companies, including stamping foil action by four groups of servo motor control.

MSTL-780/920/1080 立式自动烫印模切机是为了适应国内外客户的烫印、模切、压凸、压痕工艺而设计的。综合了国内外先进的技术而自主设计的。
MSTL-780/920/1080 具有操作简单、定位精确、安全可靠及低投资，高回报的优点，是中小企业制作高档、精美的小批量印品的理想设备。
MSTL-780/920/1080 自动烫印模切机由主机、自动输纸机构、烫印机构及电气控制等四大部分组成。主机的作业过程是由曲轴连杆机构带动压架作往复运动和压力调整机构共同完成的。在主机上，安装烫印机构并与自动输纸机构联接后，则能执行自动输纸模切/烫金-剥离-收纸的工作循环。
电气控制箱采用了先进的PLC控制系统，其主要元件由国外著名公司提供，其中烫金拉动作，由四组伺服电机控制。

## 技术参数 Main Technical Parameters

| 型号 | Model | MSTL-780 | MSTL-930 | MSTL-1080 |
|---|---|---|---|---|
| 最大纸张幅面 | Max Sheet Size | 780x560mm | 930x660mm | 1080x780mm |
| 最小纸张幅面 | Min Sheet Size | 200x200mm | 300x300mm | 350x350mm |
| 输纸堆高度 | Max Feeder Pile Height | 700mm | 700mm | 750mm |
| 收纸堆高度 | Max Delivery Pile Height | 160mm | 160mm | 160mm |
| 最大工作压力 | Max Working Pressure | 120T | 160T | 200T |
| 总峰值功率 | Max Peak Power | 15kw | 16kw | 20kw |
| 正常工作功率 | Steady-statePower | 9kw | 9kw | 10kw |
| 气泵排气量 | Air Flow Rate | $40m^3/h$ | $40m^3/h$ | $40m^3/h$ |
| 纸板适用范围 | Shet Thickness | 120-200gsm | 120-200gsm | 120-2000gsm |
| 机器最高速度 | Speed | 1500-2800pcs/h | 1500-2500pcs/h | 1500-2000pcs/h |
| 机器重量 | Weight | 6000kg | 7500kg | 9000kg |
| 机器噪音 | Noise | ＜77db | ＜77db | ＜77db |
| 电热板功率 | Heating Plate Power | 8kw | 10kw | 12kw |
| 电热板区域 | Heating Zones | 4 | 4 | 6 |
| 机器外形尺寸 | Dimension | 3850x1920x2200mm | 4120x2100x2300mm | 4230x2270x2280mm |
| 纵向电化铝走箔轴数 | Vertical Foil Axle | 2 rollers | 2 rollers | 2 rollers |
| 横向电化铝走箔轴数 | Horizontal Foil Axle | 2 rollers | 2 rollers | 2 rollers |

本公司有权保留对机器技术参数的修改，不另通知。
Company has the right to modify the machine parameters without further notice.

# MSWT-1080-H

## Vertical Automatic Hot Foil Stamping
## 立式全自动烫金机

# PRODUCT OVERVIEW/产品概述

MSWT-1080-H vertical automatic stamping machine is designed for meet the domestic of foreign customers hot stamping embossing, indentation process .Optimized structural design that integrates the characteristics of various hot stamping machines, havina the advantages of hioh-speed and hioh-precision hich-end machines, at the same time, it solves the fotadefects of traditional hot stamping electromechanical aluminum lines, such as long length and dificult winding operation.

MSWT-1080-H has the advantages of simple operation, accurate positioning, safe and reliable, low investment and high return.lt is the ideal equipment for producing high-end and exquisite prints.

MSWT-1080-H is composed of four parts: main motor, auto feeder structure and hot foil stamping structure electric equip.

The working process of the main engine is driven by the crankshaft connecting rod mechanism for the reciprocating motion and the pressure adiustina mechanism with the completion,ln the host, the installation of hot stamping mechanismand connect with the automatic paper feeding mechanism, you can perform automatic feeding/ hot stamping - peel- thecollection of the work cycle.

Electric control box uses advanced PLC control system, the main components provided by the famous foreign companies including stamping foil action by four qroups of servo motor control.

MSWT-1080-H平压平全自动烫金机是为了适应国内外客户的烫印、压凸工艺，综合了国内外各类烫印机特点优化结构设计，继承了高端机的高速、高精度优势，同时解决了传统烫金机电化铝线路长，穿绕操作难度大等致命缺陷!

MSWT-1080-H具有操作简单、定位精确、安全可靠及低投资，高回报的优点，是制作高档、精美印品的理想设备。

MSWT-1080-H平压平全自动烫金机由主机、自动输纸机构、烫印机构及电气控制等四大部分组成。

主机的作业过程是由曲轴连杆机构带动压架作往复运动和压力调整机构共同完成的。在主机上，安装烫印机构并与自动输纸机构联接后，则能执行自动输纸-烫金-收纸的工作循环。

电气控制箱采用了先进的PLC控制系统，其主要元件由国内外著名公司提供，其中烫金送拉动作，由四组伺服电机控制。

## 技术参数 Main Technical Parameters

| 型号 | Model | MSWT-1080-H |
|---|---|---|
| 最大纸张幅面 | Max Sheet Size | 1080x780mm |
| 最小纸张幅面 | Min Sheet Size | 400x380mm |
| 输纸堆高度 | Max Feeder Pile Height | 1500mm |
| 收纸堆高度 | Max Delivery Pile Height | 700mm |
| 最大工作压力 | Max Working Pressure | 300T |
| 总峰值功率 | Max Peak Power | 30kw |
| 正常工作功率 | Steady-statePower | 15kw |
| 气泵排气量 | Air Flow Rate | 80m³/h |
| 纸板适用范围 | Shet Thickness | 120-600gsm |
| 机器最高速度 | Speed | 4500pcs/h |
| 机器重量 | Weight | 11000kg |
| 机器噪音 | Noise | ＜80db |
| 电热板功率 | Heating Plate Power | 18kw |
| 电热板区域 | Heating Zones | 12 |
| 机器外形尺寸 | Dimension | 6300x2250x2680mm |
| 纵向电化铝走箔轴数 | Vertical Foil Axle | 2 rollers |
| 横向电化铝走箔轴数 | Horizontal Foil Axle | 1 rollers |

本公司有权保留对机器技术参数的修改，不另通知。
Company has the right to modify the machine parameters without further notice.

# TYMB-750

## Hot Foil Stamping And Die Cutting Machine

电脑烫金模切两用机

**USAGE**

It is the latest generation product with high precision and high efficiency. It is major suitable for ironing printing all assortments of multichromatic electrochem–ical aluminum, pressing can cavo–convex trademarks, sampling adver–tise–ment, cartoon, books, cover, post card etc. Various senior decoration, printing matter. It is an ideal equipment for printing, packaging decoration as wellas plastic industry.

### Features

- High strength due to one piece casting by using top–ranking material for machine body.
- Single plate electromagnetic clutch is sensitive and reliable.
- Computer controlled is stable.
- Operation position is reasonably arranged, moving–bed can be opened to its optimum.
- Skipping is accurate, so as to save foils.
- With three functions of continuous creasing and cutting, opening dwell operation and closing dwell operation and a large dwell adjusting range.
- Safety system is reliable.
- Central lubrication system guarantees fine lubrication and reduce friction.

CE

**主要技术参数 Main Specification:**

| 型号 Model | 最大有效压切面积 Max. Platen area available | 最大烫印面积 Max. Stamping area available | 跳步指定范围 Range of skip order | 工作压力 Working pressure | 送箔长度 Foil–delivered length |
|---|---|---|---|---|---|
| TYMK–750 | 750×520mm | 660×480mm | 微机内部处理 Built–in Processing With Computer | 150T | 520mm |

| 送箔组数 Foil–delivered group | 工作速度 Working speed | 主机功率 Main motor power | 总功率 Total power | 机器重量 Net Weight | 外形尺寸(长×宽×高) Deminsion (L×W×H) |
|---|---|---|---|---|---|
| 2组 (groups) | 1600 (strokes/h) | 2.2 kw–6H | 7 (kw) | 2200 (kg) | 1900×1450×1950mm |



# TYMB-930/1100

## Hot Foil Stamping And Die Cutting Machine

电脑烫金模切两用机

### 用 途

电脑烫金模切两用机是新一代高精度高效益创新产品，主要适用于烫印各种彩色电化铝，压制凹凸及模切各种图片商标，产品样本广告，纸盒，书刊，封面，贺年卡等各种高级装璜，印刷制品。是印刷、包装装璜及塑料行业的理想加工设备。

### 主要结构特点

- 机身采用优质材料整体铸造而成，强度高。
- 单片式电磁离合器动作灵敏可靠。
- 操作高度设计合理，压架打开角度大。
- 电脑控制稳定，烫印精美。
- 跳步准确，节省铝箔。
- 具有连续压切和打开延时闭合延时三大功能，延时调节范围大。
- 安全防护系统灵敏可靠。
- 集中润滑系统保证了良好的润滑，减少磨损。

CE

**主要技术参数 Main Specification:**

| 型号 Model | 最大有效压切面积 Max. Platen area available | 最大烫印面积 Max. Stamping area available | 跳步指定范围 Range of skip order | 工作压力 Working pressure | 送箔长度 Foil–delivered length |
|---|---|---|---|---|---|
| TYMK–930 | 930×670mm | 930×640mm | 微机内部处理 Built–in Processing With Computer | 170T | 640mm |
| TYMK–1100 | 1100×800mm | 1100×800mm | 微机内部处理 Built–in Processing With Computer | 220T | 800mm |

| 型号 Model | 送箔组数 Foil–delivered group | 工作速度 Working speed | 主机功率 Main motor power | 总功率 Total power | 机器重量 Net Weight | 外形尺寸(长×宽×高) Deminsion (L×W×H) |
|---|---|---|---|---|---|---|
| TYMK–930LS | 3组 (groups) | 1320 (strokes/h) | 4kw–4H | 13(kw) | 3500 (kg) | 1800×1900×2150mm |
| TYMK–1100LS | 3组 (groups) | 1200 (strokes/h) | 4kw–6H | 16(kw) | 4700 (kg) | 2150×2150×2300mm |

# MSZC-80

## Automatic Servo Gold Stamping Machine

全自动伺服烫金机

**USAGE**

This machine is suitable for hot stamping anodized aluminum on various paper products,all kinds of advanced fine printing,can be in this machine for concave and convex hot stamping,flat hot stamping,in order to get three-dimensional sense, exquisite and beautiful packaging,decoration products,Paper feeding pressure servo control,easy and fast operation.

## Features

- The entire machine is made of Q235 carbon steel, and the body wall panels are treated with special processes to ensure high strength and never deform, ensuring the safety of the body wall panels.
- The ball screw imported from Taiwan is used to ensure accurate machine movement. The host servo has an overload protection device, and the synchronous belt fracture protection device will automatically stop when it is impacted by external forces, reducing damage to the fuselage and suction and discharge accuracy, and avoiding the occurrence of malfunctions.
- The host uses imported original bearings.
- The entire machine uses imported electrical originals such as Omron from Japan and Schneider from France.
- The hot stamping accuracy reaches ±0.1mm, and the machine's maximum speed reaches 1800 sheets/hour.
- Equipped with pressure adjustment automatic control device to ensure fast and accurate adjustment of hot stamping pressure.
- Chinese and English touch screen operation interface.
- Using Taiwan Airtac pneumatic components to ensure the accuracy of every pneumatic action.
- The main PLC uses Xinjie Electric (stock code 603416) to ensure smooth operation of the machine.

CE

**主要技术参数 Main Specification:**

| 型号 Model | 最大纸张尺寸 Max Paper Size | 最小纸张尺寸 Min Paper Size | 最大烫金面积 Max.Hot Stamping Area | 最高工作速度 Max Working Speed | 最大堆纸高度 Max Paper Pile Height |
|---|---|---|---|---|---|
| MSZC-80 | 800x600mm | 150x150mm | 600x50mm | 30times/min | 600mm |

| 材料厚度 Thickness | 纠偏精度 Deviation Correction Accuracy | 功率 Power | 机器尺寸 Dimension | 整机重量 Weight | 机器压力 Machine Pressure |
|---|---|---|---|---|---|
| 128-3000gsm | ±0.1mm | 13kw | 2100x1800x2150mm | 2500kgs | 35ton |



# MSZC-95A

## Automatic Servo Gold Stamping Machine

全自动伺服烫金机

## Features

- The entire machine is made of Q235 carbon steel, and the body wall panels are treated with special processes to ensure high strength and never deform, ensuring the safety of the body wall panels.
- The ball screw imported from Taiwan is used to ensure accurate machine movement. The host servo has an overload protection device, and the synchronous belt fracture protection device will automatically stop when it is impacted by external forces, reducing damage to the fuselage and suction and discharge accuracy, and avoiding the occurrence of malfunctions.
- The host uses imported original bearings.
- The entire machine uses imported electrical originals such as Omron from Japan and Schneider from France.
- The hot stamping accuracy reaches ±0.1mm, and the machine's maximum speed reaches 1800 sheets/hour.
- Equipped with pressure adjustment automatic control device to ensure fast and accurate adjustment of hot stamping pressure.
- Chinese and English touch screen operation interface.
- Using Taiwan Airtac pneumatic components to ensure the accuracy of every pneumatic action.
- The main PLC uses Xinjie Electric (stock code 603416) to ensure smooth operation of the machine.

CE

**主要技术参数 Main Specification:**

| 型号 Model | 最大纸张尺寸 Max Paper Size | 最小纸张尺寸 Min Paper Size | 最大烫金面积 Max.Hot Stamping Area | 最高工作速度 Max Working Speed | 最大堆纸高度 Max Paper Pile Height |
|---|---|---|---|---|---|
| MSZC-95 | 950x650mm | 200x200mm | 800x530mm | 1500times/h | 600mm |

| 功率 Power | 机器尺寸 Dimension | 整机重量 Weight | 机器压力 Machine Pressure |
|---|---|---|---|
| 17kw | 2300x1460x2150mm | 3200kgs | 40ton |

# ML-930/1040

## Die Cutting and Creasing Machine

平压压痕切线机

### Features

- Sliding bearings are made of high quality alloy cooper, thus to get effect of anti–frietion and shake reducing.
- Flywheel is with big moment of force and large pressure.
- High strength due to one piece casting by using top–ranking material for machine body.
- Single plate electromagnetic clutch is sensitive and reliable.
- With functions of single, continuous and opening dwell operation, dwell range is adjustable.
- Operating position is reasonably arranged, moving–bed can be opened to its optimum.
- Safety system is reliable.
- Can equip inner and outer movable frame and centrailzed lubrication device.

### Usage

Creasing and Cutting Machine is a special equipment for creasing and cutting ordinary cardboard corrugated board plastic and leather ingeneral, applicable to printing packaging decoration and plastic industries. Machine is characterized by compact strrctute, fine workmanship, big pressure, high precision and easy and reliable operation, etc.

### 用 途

平压压痕切线机是压制截切各种普通纸板、瓦楞纸板、塑片、皮革制品的专用设备，适用于印刷、包装装璜、塑料行业之用。本机具有结构紧凑、制造精良压切力大、精度高、使用方便、操作安全可靠等优点。

CE

**主要技术参数 Main Specification:**

| 型 号 Model | 板框内尺寸 Inner Chase Size | 工作速度 Speed | 压痕线切长度 Max. Rule Length | 电机功率 Motor Power | 机器重量 Machine Weight | 外形尺寸 Overall Dimensions |
|---|---|---|---|---|---|---|
| ML–930 | 930×670mm | 23±3 Strokes/Min | <25m | 4kw–6H | 3000kg | 1650×1880×1700mm |
| ML–1040 | 1040×720mm | 20±3 Strokes/Min | <30m | 4kw–6H | 3500kg | 1760×2000×1750mm |



# ML-750

## Die Cutting and Creasing Machine

平压压痕切线机

### USAGE

Creasing and Cutting Machine is a special equipment for creasing and cutting ordinary cardboard corrugated board plastic and leather ingeneral, applicable to printing packaging decoration and plastic industries. Machine is characterized by compact strrctute, fine workmanship, big pressure, high precision and easy and reliable operation, etc.

### Features

- Sliding bearings are made of high quality alloy cooper, thus to get effect of anti–frietion and shake reducing.
- Flywheel is with big moment of force and large pressure.
- High strength due to one piece casting by using top–ranking material for machine body.
- Single plate electromagnetic clutch is sensitive and reliable.
- With functions of single, continuous and opening dwell operation, dwell range is adjustable.
- Operating position is reasonably arranged, moving–bed can be opened to its optimum.
- Safety system is reliable.
- Can equip inner and outer movable frame and centrailzed lubrication device.

CE

**主要技术参数 Main Specification:**

| 型 号 Model | 板框内尺寸 Inner Chase Size | 工作速度 Speed | 压痕线切长度 Max. Rule Length | 电机功率 Motor Power | 机器重量 Machine Weight | 外形尺寸 Overall Dimensions |
|---|---|---|---|---|---|---|
| ML–750 | 750×520mm | 25±3 Strokes/Min | <15m | 2.2kw–6H | 2000kg | 1450×1600×1450mm |

# ML-1300/1400/1500

## Die Cutting and Creasing Machine

平压压痕切线机

**USAGE**

Creasing and Cutting Machine is a special equipment for creasing and cutting ordinary cardboard corrugated board plastic and leather ingeneral, applicable to printing packaging decoration and plastic industries. Machine is characterized by compact strrctute, fine workmanship, big pressure, high precision and easy and reliable operation, etc.

### 用 途

平压压痕切线机是压制截切各种普通纸板、瓦楞纸板、塑片、皮革制品的专用设备，适用于印刷、包装装璜、塑料行业之用。本机具有结构紧凑、制造精良压切力大、精度高、使用方便、操作安全可靠等优点。

### 主要结构特点

- 滑动轴承采用优质铸造铜合金，耐磨减振。
- 飞轮力矩大，压切力更大。
- 机身采用高优质材料整体球墨，强度高、钢性好。
- 单片式电磁离合器动作灵敏可靠。
- 具有单张压力、连续压切和打开延时三功能，延时范围可随意调节。
- 操作高度设计合理，压架打开角度大。
- 安全防护系统可调。
- 可装置内・外活动板框和集中加油装置。

CE

**主要技术参数 Main Specification:**

| 型号 Model | 板框内尺寸 Inner Chase Size | 工作速度 Speed | 压痕线切长度 Max. Rule Length | 电机功率 Motor Power | 机器重量 Machine Weight | 外形尺寸 Overall Dimensions |
|---|---|---|---|---|---|---|
| ML-1300 | 1300×920mm | 16±2 Strokes/Min | <40m | 5.5kw-6H | 6200kg | 2350×2100×1950mm |
| ML-1400 | 1400×1000mm | 15±2 Strokes/Min | <45m | 5.5kw-6H | 6800kg | 2450×2100×2000mm |
| ML-1500 | 1500×1040mm | 14±2 Strokes/Min | <48m | 5.5kw-6H | 7500kg | 2550×2100×2100mm |



# ML-1100/1200

## Die Cutting and Creasing Machine

平压压痕切线机

**USAGE**

Compared with the same specifications, its structure is more reasonable scientific design, stable working, lower voice and great pressure for cutting, especially as to thick cartoon, plastic sheet etc products with noticeable effect.

### 用 途

1100型比同规格机型结构更加科学合理，运转平稳，噪A声低且压切力大，特别针对厚纸板、塑片等压切力过大的产品，有明显的效果。

### Features

- Sliding bearings are made of high quality alloy cooper, thus to get effect of anti-frietion and shake reducing.
- Flywheel is with big moment of force and large pressure.
- High strength due to one piece casting by using top-ranking material for machine body.
- Single plate electromagnetic clutch is sensitive and reliable.
- With functions of single, continuous and opening dwell operation, dwell range is adjustable.
- Operating position is reasonably arranged, moving-bed can be opened to its optimum.
- Safety system is reliable.
- Can equip inner and outer movable frame and centrailzed lubrication device.

CE

**主要技术参数 Main Specification:**

| 型号 Model | 板框内尺寸 Inner Chase Size | 工作速度 Speed | 压痕线切长度 Max. Rule Length | 电机功率 Motor Power | 机器重量 Machine Weight | 外形尺寸 Overall Dimensions |
|---|---|---|---|---|---|---|
| ML-1100 | 1100×800mm | 20±2 Strokes/Min | <32m | 4kw-6H | 4500kg | 1950×2150×1850mm |
| ML-1200 | 1200×820mm | 20±2 Strokes/Min | <35m | 4kw-6H | 5000kg | 2050×2150×1900mm |

# ML-2000/2200/2500

## Die Cutting and Creasing Machine

平压压痕切线机

## ADVANTAGE

- 滑动轴承采用优质铸造铜合金，耐磨减振。
- 飞轮力矩大，压切力大。
- 机身采用高优质材料整体铸造，强度高、钢性好。
- 单片式电磁离合器动作灵敏可靠。
- 具有单张压力、连续压切和打开延时三功能，延时范围可随意调节。
- 操作高度设计合理，压架打开角度大。
- 安全防护系统可调。
- 可装置内・外活动板框和集中加油装置。

### 用 途

平压压痕切线机是压制截切各种普通纸板、瓦楞纸板、塑片、皮革制品的专用设备，适用于印刷、包装装璜、塑料行业之用。本机具有结构紧凑、制造精良压切力大、精度高、使用方便、操作安全可靠等优点。

CE

**主要技术参数 Main Specification:**

| 型号 Model | 板框内尺寸 Inner Chase Size | 工作速度 Speed | 压痕线切长度 Max. Rule Length | 电机功率 Motor Power | 机器重量 Machine Weight | 外形尺寸 Overall Dimensions |
|---|---|---|---|---|---|---|
| ML-2000 | 2000×1400mm | 13±2 Strokes/Min | <65m | 15kw-6H | 16000kg | 3180×2400×2580mm |
| ML-2200 | 2200×1400mm | 13±2 Strokes/Min | <70m | 15kw-6H | 18000kg | 3380×2400×2580mm |
| ML-2500 | 2500×1500mm | 11±3 Strokes/Min | <80m | 22kw | 20000kg | 3680×2500×2580mm |



# ML-1600/1800

## Die Cutting and Creasing Machine

平压压痕切线机

## USAGE

Creasing and Cutting Machine is a special equipment for creasing and cutting ordinary cardboard corrugated board plastic and leather ingeneral, applicable to printing packaging decoration and plastic industries. Machine is characterized by compact strrctute, fine workmanship, big pressure, high precision and easy and reliable operation, etc.

### Features

- Sliding bearings are made of high quality alloy cooper, thus to get effect of anti-frietion and shake reducing.
- Flywheel is with big moment of force and large pressure.
- High strength due to one piece casting by using top-ranking material for machine body.
- Single plate electromagnetic clutch is sensitive and reliable.
- With functions of single, continuous and opening dwell operation, dwell range is adjustable.
- Operating position is reasonably arranged, moving-bed can be opened to its optimum.
- Safety system is reliable.
- Can equip inner and outer movable frame and centrailzed lubrication device.

CE

**主要技术参数 Main Specification:**

| 型号 Model | 板框内尺寸 Inner Chase Size | 工作速度 Speed | 压痕线切长度 Max. Rule Length | 电机功率 Motor Power | 机器重量 Machine Weight | 外形尺寸 Overall Dimensions |
|---|---|---|---|---|---|---|
| ML-1600 | 1600×1250mm | 13±2 Strokes/Min | <50m | 11kw-6H | 12000kg | 2780×2300×2400mm |
| ML-1800 | 1800×1300mm | 13±2 Strokes/Min | <60m | 11kw-6H | 14000kg | 2980×2300×2500mm |