
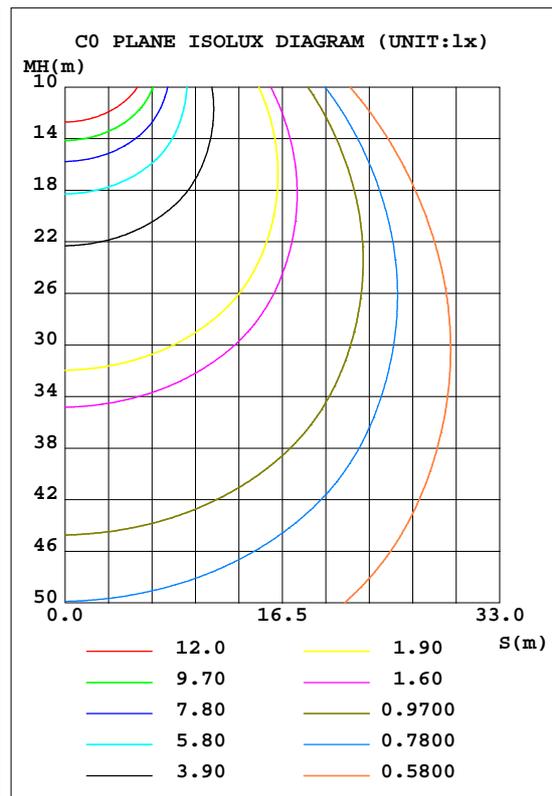


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.6V I:0.1490A P:34.00W PF:0.9900 Lamp Flux:6136.7x1 lm		
NAME: VWP-LC001-1200	TYPE:	WEIGHT:
SPEC.:	DIM.: 1.2*0.09*0.06	SERIAL No.:
MFR.:	SUR.:1.2*0.09	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 180.49 lm/W			
MODEL	VWP-LC001-1200	I _{max} (cd)	1937	S/MH(C0/180)	1.36
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	6136.7	h UP, DN(C0-180)	1.8, 48.4
NOMINAL FLUX(lm)	6136.7	CIE CLASS	DIRECT	h UP, DN(C180-360)	1.8, 48.0
LAMPS INSIDE	1	h up(%)	3.6	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	229.9	h down(%)	96.4	CIBSE SHR MAX	1.50

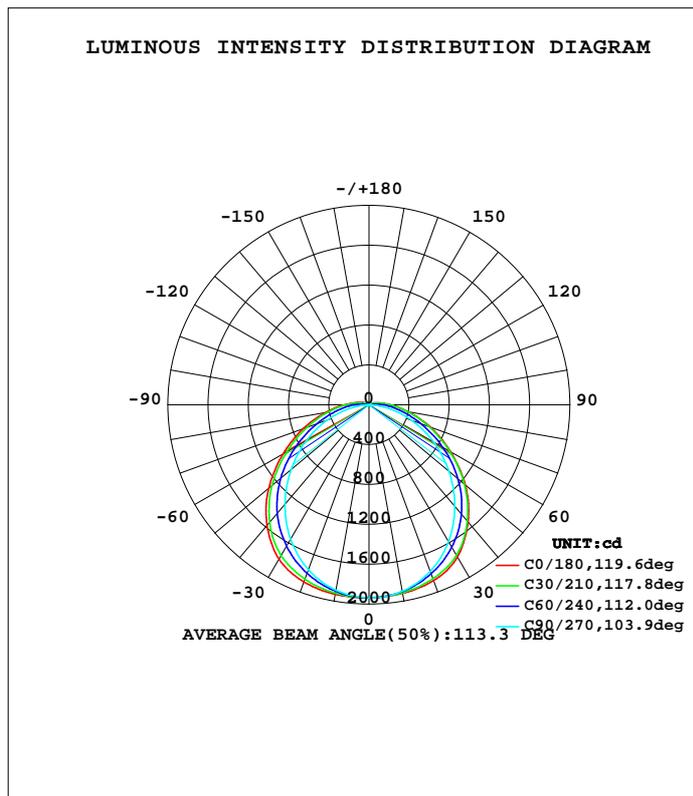

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1920	1909	1899	1917	1930	1910	1890	1901	0- 10	183.5	183.5	2.99,2.99
20	1877	1834	1780	1845	1891	1832	1761	1819	10- 20	530.1	713.6	11.6,11.6
30	1761	1703	1584	1713	1790	1697	1559	1682	20- 30	814.5	1528	24.9,24.9
40	1534	1495	1329	1509	1578	1491	1301	1469	30- 40	990.1	2518	41,41
50	1250	1210	1039	1227	1303	1210	1013	1184	40- 50	1024	3542	57.7,57.7
60	937.3	895.6	739.7	910.8	987.0	897.6	719.3	873.0	50- 60	919.7	4462	72.7,72.7
70	644.9	599.7	447.1	611.4	692.2	604.0	435.2	582.4	60- 70	716.7	5179	84.4,84.4
80	392.6	363.2	176.4	374.0	435.2	370.8	172.1	352.4	70- 80	477.1	5656	92.2,92.2
90	213.4	191.8	20.07	201.7	242.7	202.0	19.03	187.5	80- 90	262.6	5918	96.4,96.4
100	115.1	86.91	12.45	93.69	131.9	94.32	11.70	84.71	90-100	125.2	6044	98.5,98.5
110	59.61	29.12	7.782	33.27	70.00	34.40	7.458	28.00	100-110	55.18	6099	99.4,99.4
120	23.25	6.485	4.880	7.506	30.12	7.818	4.871	6.242	110-120	21.02	6120	99.7,99.7
130	7.996	4.646	3.243	5.629	9.526	5.866	3.415	4.356	120-130	6.986	6127	99.8,99.8
140	5.737	3.918	2.873	4.733	6.657	4.911	3.186	3.738	130-140	3.863	6131	99.9,99.9
150	4.669	3.715	3.130	4.453	5.145	4.527	3.422	3.595	140-150	2.674	6133	99.9,99.9
160	4.285	3.753	3.542	4.453	4.751	4.467	3.658	3.749	150-160	1.875	6135	100,100
170	3.973	3.660	3.839	4.343	4.592	4.335	3.867	3.639	160-170	1.142	6136	100,100
180	3.759	4.022	3.955	3.997	3.765	4.017	3.955	3.997	170-180	0.3779	6137	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.96
1.0	1.02	.97	.93	.99	.95	.91	.94	.90	.87	.89	.87	.84	.85	.83	.81	.78
2.0	.88	.81	.75	.86	.79	.74	.82	.76	.71	.78	.73	.69	.74	.70	.67	.65
3.0	.77	.69	.62	.75	.67	.61	.72	.65	.59	.68	.63	.58	.65	.61	.56	.54
4.0	.68	.59	.52	.67	.58	.52	.64	.56	.50	.61	.54	.49	.58	.53	.48	.46
5.0	.61	.52	.45	.59	.51	.44	.57	.49	.44	.55	.48	.43	.52	.47	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.51	.44	.38	.49	.43	.37	.47	.41	.37	.35
7.0	.50	.41	.34	.49	.40	.34	.47	.39	.34	.45	.38	.33	.43	.37	.33	.31
8.0	.45	.37	.31	.44	.36	.30	.43	.35	.30	.41	.34	.30	.40	.34	.29	.27
9.0	.41	.33	.27	.41	.33	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.24
10.0	.38	.30	.25	.38	.30	.25	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22

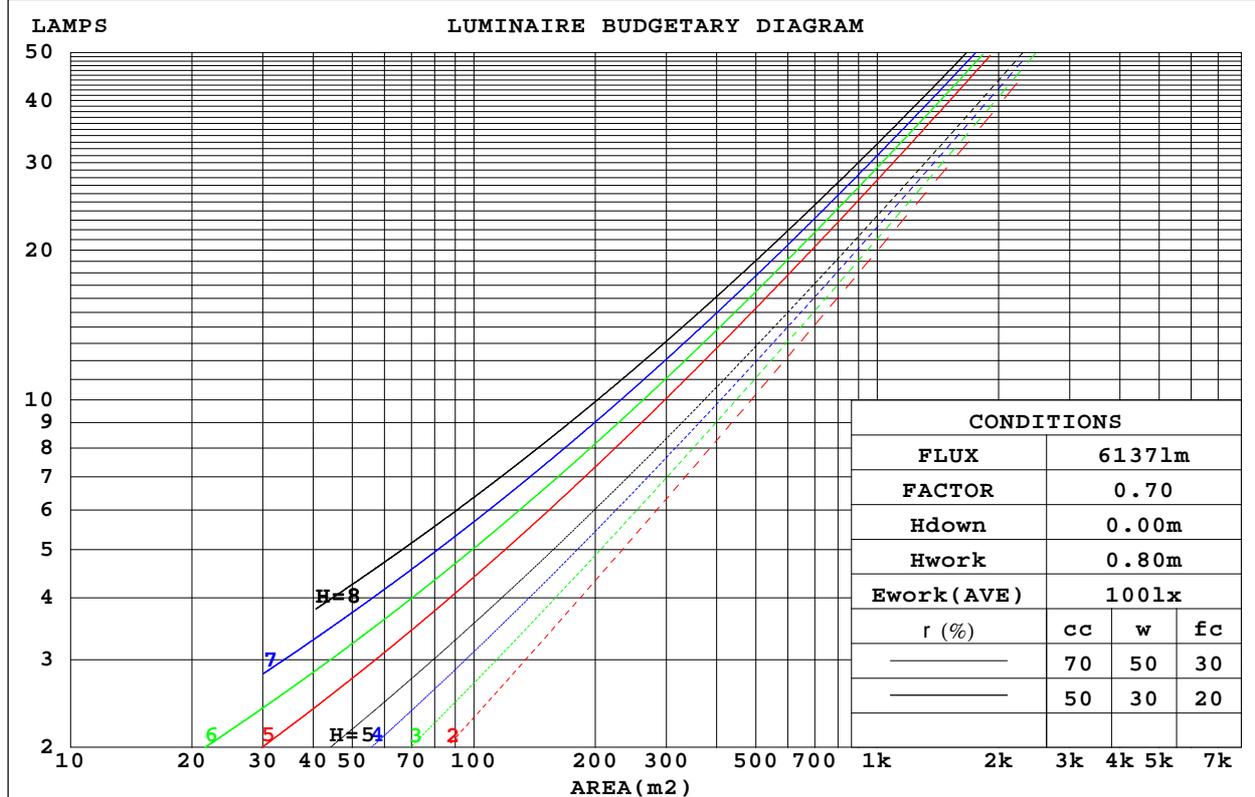

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

WEC AND CCEC

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.338	.192	.061	.330	.188	.060	.315	.180	.058	.300	.173	.056	.287	.167	.054	
2.0	.307	.168	.052	.299	.165	.051	.286	.159	.049	.273	.153	.048	.261	.148	.047	
3.0	.279	.149	.044	.273	.146	.044	.260	.141	.043	.249	.137	.042	.239	.132	.041	
4.0	.255	.133	.039	.249	.131	.039	.239	.126	.038	.228	.123	.037	.219	.119	.036	
5.0	.235	.119	.035	.229	.118	.034	.220	.114	.034	.211	.111	.033	.202	.108	.032	
6.0	.217	.109	.031	.212	.107	.031	.203	.104	.030	.195	.101	.030	.187	.099	.029	
7.0	.201	.099	.028	.197	.098	.028	.189	.096	.028	.182	.093	.027	.175	.091	.027	
8.0	.187	.092	.026	.184	.090	.026	.177	.088	.025	.170	.086	.025	.164	.084	.024	
9.0	.175	.085	.024	.172	.084	.024	.165	.082	.023	.159	.080	.023	.154	.078	.023	
10.0	.165	.079	.022	.162	.078	.022	.156	.076	.021	.150	.075	.021	.145	.073	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.218	.218	.218	.186	.186	.186	.127	.127	.127	.073	.073	.073	.023	.023	.023	
1.0	.210	.183	.159	.179	.157	.137	.123	.108	.095	.071	.063	.055	.023	.020	.018	
2.0	.202	.159	.124	.173	.137	.107	.118	.095	.075	.068	.055	.044	.022	.018	.014	
3.0	.194	.142	.101	.166	.123	.087	.114	.085	.061	.066	.050	.036	.021	.016	.012	
4.0	.186	.129	.085	.160	.111	.074	.110	.078	.052	.064	.045	.031	.020	.015	.010	
5.0	.179	.119	.074	.153	.103	.065	.106	.072	.046	.061	.042	.027	.020	.014	.009	
6.0	.171	.110	.067	.147	.096	.058	.102	.067	.041	.059	.039	.024	.019	.013	.008	
7.0	.164	.104	.061	.141	.090	.053	.098	.063	.038	.057	.037	.022	.018	.012	.007	
8.0	.158	.098	.057	.136	.085	.049	.094	.060	.035	.055	.035	.021	.018	.012	.007	
9.0	.152	.093	.053	.131	.081	.046	.090	.057	.033	.053	.033	.020	.017	.011	.007	
10.0	.146	.089	.050	.126	.077	.044	.087	.054	.031	.051	.032	.019	.016	.011	.006	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.7	24.2	23.1	24.5	24.8	21.8	23.3	22.1	23.6	23.8
3H	24.5	25.9	24.8	26.2	26.5	23.1	24.5	23.5	24.8	25.1
4H	25.3	26.7	25.7	27.0	27.3	23.7	25.0	24.0	25.3	25.7
6H	26.2	27.4	26.6	27.8	28.1	24.0	25.3	24.4	25.6	26.0
8H	26.6	27.8	27.0	28.2	28.5	24.2	25.4	24.6	25.7	26.1
12H	27.1	28.2	27.5	28.6	29.0	24.2	25.4	24.6	25.7	26.1
4H 2H	23.3	24.6	23.7	24.9	25.3	22.6	23.9	22.9	24.2	24.5
3H	25.3	26.4	25.7	26.8	27.2	24.2	25.3	24.6	25.7	26.1
4H	26.3	27.4	26.7	27.8	28.2	24.9	25.9	25.3	26.3	26.7
6H	27.3	28.3	27.8	28.7	29.2	25.4	26.3	25.8	26.7	27.2
8H	27.9	28.8	28.3	29.2	29.7	25.6	26.4	26.0	26.9	27.3
12H	28.4	29.3	28.9	29.7	30.2	25.7	26.5	26.2	26.9	27.4
8H 4H	26.6	27.5	27.1	27.9	28.4	25.4	26.3	25.9	26.7	27.2
6H	27.9	28.7	28.4	29.1	29.6	26.2	26.9	26.7	27.4	27.9
8H	28.6	29.3	29.1	29.8	30.3	26.5	27.2	27.0	27.7	28.2
12H	29.4	30.0	29.9	30.5	31.1	26.8	27.4	27.3	27.9	28.4
12H 4H	26.7	27.5	27.1	27.9	28.4	25.5	26.3	26.0	26.8	27.3
6H	28.0	28.7	28.5	29.2	29.7	26.4	27.1	27.0	27.6	28.1
8H	28.8	29.4	29.4	29.9	30.5	26.9	27.5	27.4	28.0	28.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 6137 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.3)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	43	36	55	43	36	53	43	36	30
0.80	65	53	46	64	53	45	62	52	45	38
1.00	73	62	54	72	61	54	69	62	53	46
1.25	80	69	62	79	68	61	76	67	60	52
1.50	85	75	67	83	74	67	80	72	65	57
2.00	92	83	76	90	81	75	86	79	73	65
2.50	96	88	81	94	86	80	90	83	78	69
3.00	100	92	86	97	90	85	93	87	82	73
4.00	104	97	92	101	95	90	96	91	87	77
5.00	106	101	96	104	99	94	98	94	91	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Conical surface Flux(90deg):

3035 lm

%lum = 49.5%


%lamp = 49.5%

Conical surface Flux(120deg):

4462 lm

%lum = 72.7%


%lamp = 72.7%

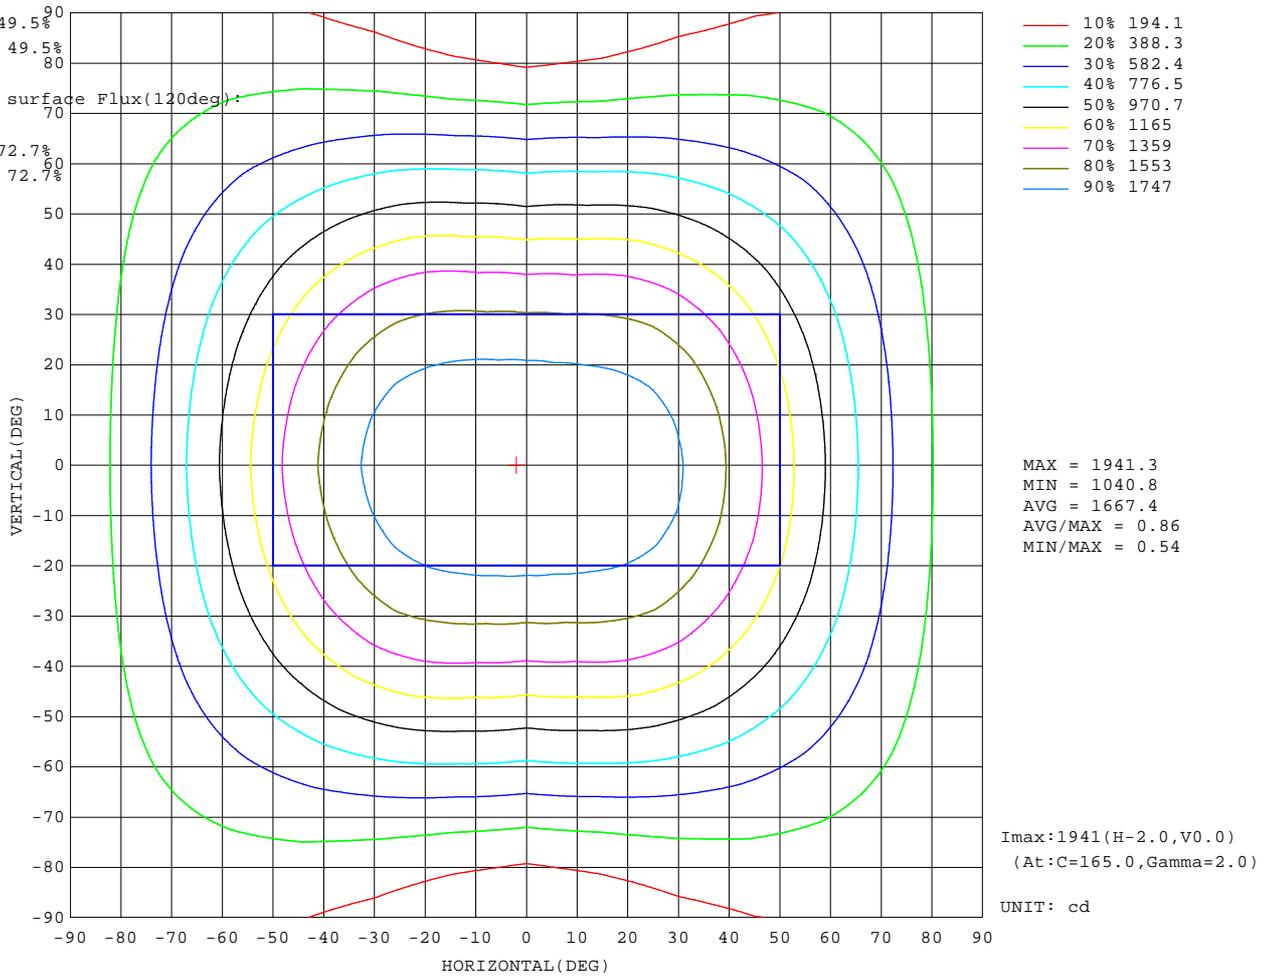

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

AAI Figure

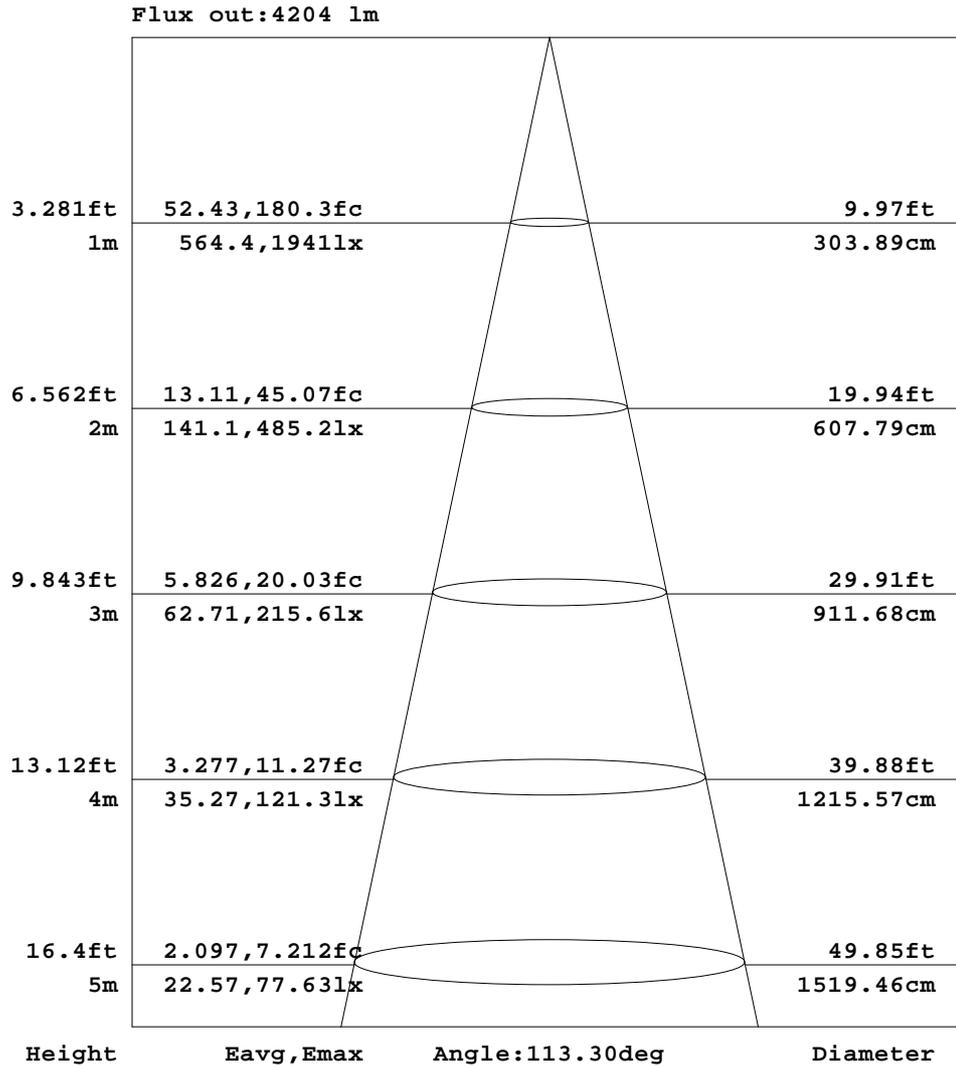


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:


ISOLUX DIAGRAM

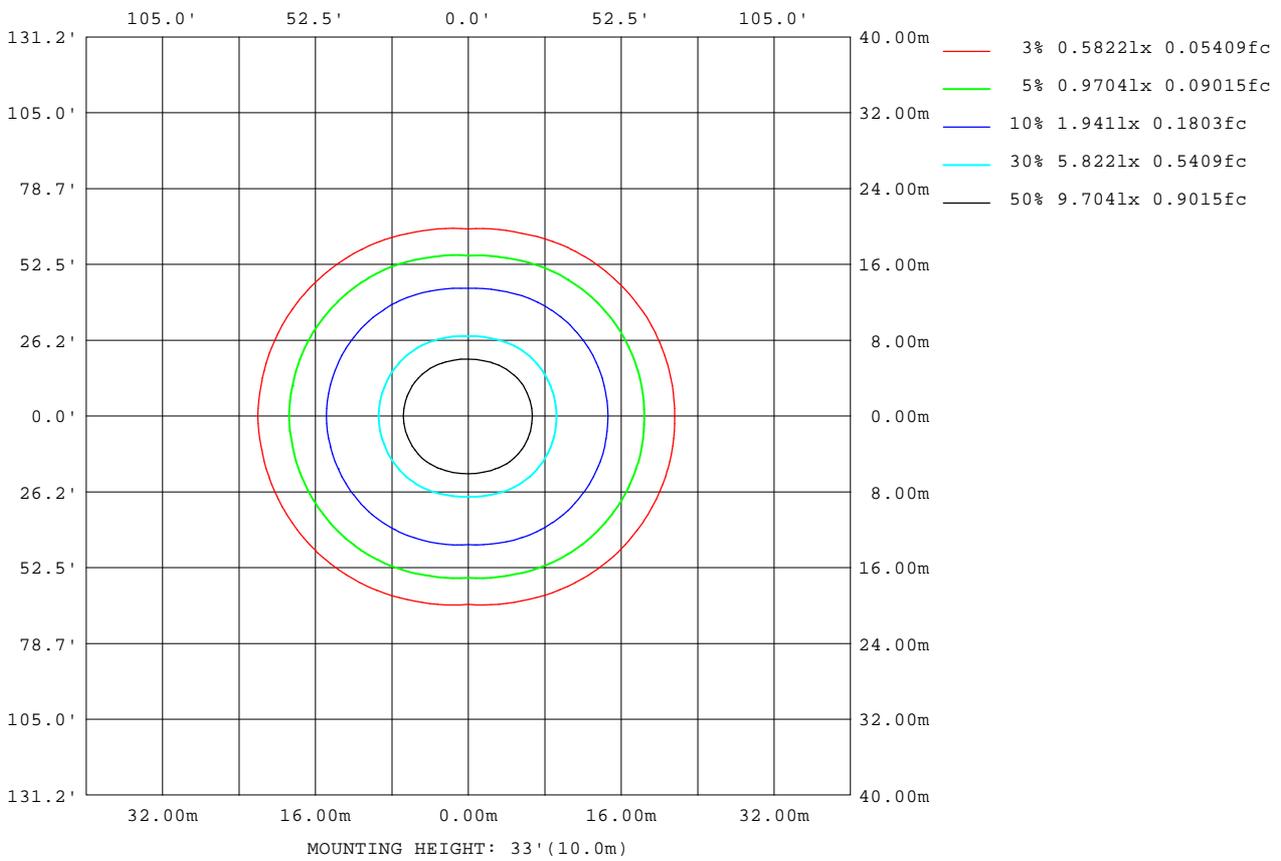

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

Planar Illuminance Curve

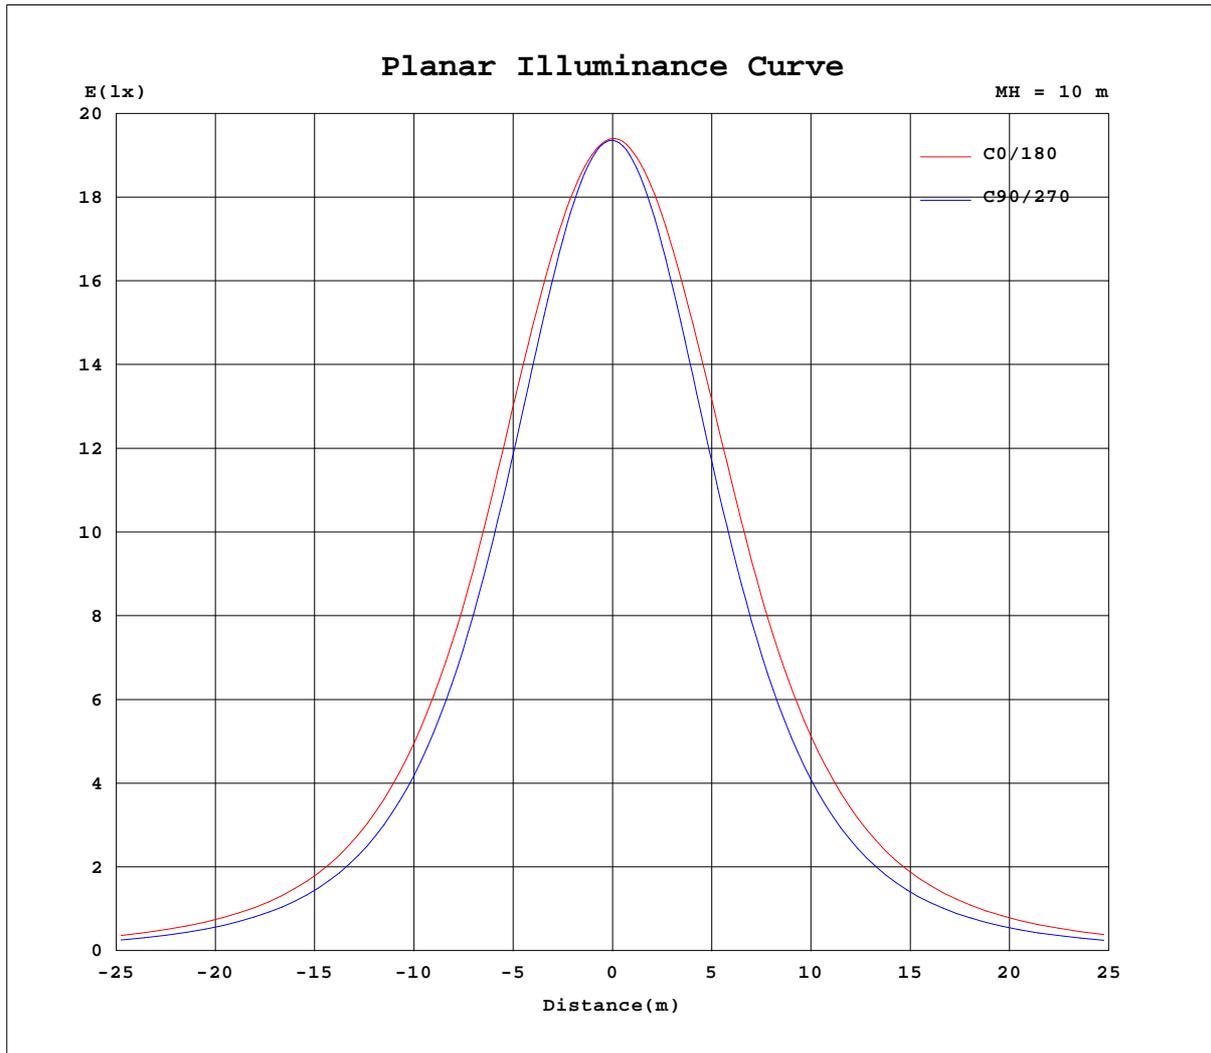

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) g (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1936	1936	1936	1936	1936	1936	1936	1936	1936	1936	1936	1936	1936	1936	1936	1936	1936	1936	1936
5	1930	1930	1929	1928	1928	1928	1928	1930	1931	1933	1935	1936	1936	1934	1933	1930	1927	1925	1923
10	1920	1920	1915	1909	1902	1900	1899	1903	1909	1917	1924	1929	1930	1927	1920	1910	1901	1893	1890
15	1904	1902	1893	1878	1862	1852	1850	1856	1870	1888	1903	1914	1917	1911	1897	1878	1858	1842	1835
20	1877	1874	1858	1834	1806	1785	1780	1791	1815	1845	1869	1886	1891	1882	1862	1832	1801	1772	1761
25	1834	1831	1810	1776	1734	1701	1691	1708	1744	1786	1821	1844	1853	1840	1814	1772	1727	1686	1668
30	1761	1761	1743	1703	1648	1601	1584	1608	1657	1713	1756	1781	1790	1777	1748	1697	1639	1583	1559
35	1655	1658	1645	1612	1548	1487	1462	1493	1556	1623	1664	1685	1695	1681	1656	1605	1536	1467	1436
40	1534	1537	1523	1495	1432	1360	1329	1366	1440	1509	1545	1567	1578	1564	1538	1491	1420	1339	1301
45	1400	1403	1387	1358	1302	1225	1186	1230	1310	1375	1411	1436	1448	1433	1405	1356	1290	1202	1159
50	1250	1255	1240	1210	1157	1081	1039	1086	1166	1227	1265	1289	1303	1287	1259	1210	1147	1060	1013
55	1092	1096	1083	1054	1003	933	889	937	1012	1071	1108	1131	1144	1129	1103	1055	995	913	865
60	937	940	924	896	845	782	740	786	854	911	947	973	987	971	944	898	840	766	719
65	788	790	773	742	692	632	592	635	699	755	794	822	836	821	793	745	689	619	576
70	645	648	632	600	547	487	447	489	553	611	653	679	692	679	652	604	546	477	435
75	511	515	504	473	418	351	307	353	423	484	524	546	557	546	524	479	420	345	298
80	393	397	390	363	307	229	176	230	311	374	410	427	435	427	411	371	309	229	172
85	292	295	292	268	216	135	69.9	136	220	279	311	321	330	324	311	279	220	136	69.8
90	213	215	213	192	143	70.0	20.1	70.9	147	202	229	238	243	240	229	202	149	72.3	19.0
95	155	157	151	132	89.0	32.3	15.6	32.9	92.6	141	164	173	178	175	166	141	94.6	34.3	14.6
100	115	115	107	86.9	50.1	13.0	12.5	13.5	53.2	93.7	117	128	132	128	119	94.3	55.2	14.1	11.7
105	83.6	82.1	73.3	53.7	23.5	9.50	9.90	9.73	25.8	59.1	80.8	91.8	96.3	92.3	82.2	60.0	27.6	9.50	9.36
110	59.6	57.2	47.4	29.1	8.19	7.67	7.78	7.92	9.45	33.3	53.3	65.3	70.0	65.9	54.6	34.4	10.6	7.73	7.46
115	39.8	37.1	27.5	12.2	6.46	6.20	6.14	6.49	7.01	15.2	32.1	43.6	48.1	44.2	33.4	16.3	7.18	6.40	5.98
120	23.2	20.8	12.7	6.49	5.33	5.02	4.88	5.36	5.93	7.51	16.2	25.9	30.1	26.5	17.3	7.82	6.10	5.37	4.87
125	10.9	9.43	7.40	5.40	4.44	4.10	3.92	4.49	5.06	6.40	8.59	12.6	15.8	13.0	8.83	6.73	5.25	4.60	4.04
130	8.00	7.58	6.08	4.65	3.80	3.40	3.24	3.85	4.43	5.63	7.33	8.81	9.53	8.88	7.51	5.87	4.59	3.98	3.42
135	6.72	6.41	5.11	4.19	3.54	3.06	2.86	3.53	4.17	5.08	6.32	7.38	7.94	7.40	6.45	5.29	4.33	3.70	3.13
140	5.74	5.49	4.51	3.92	3.45	3.06	2.87	3.56	4.08	4.73	5.57	6.29	6.66	6.28	5.65	4.91	4.22	3.72	3.19
145	5.07	4.88	4.18	3.75	3.43	3.13	2.96	3.64	4.06	4.53	5.09	5.56	5.61	5.52	5.14	4.68	4.21	3.79	3.33
150	4.67	4.38	3.98	3.71	3.47	3.17	3.13	3.71	4.10	4.45	4.81	5.10	5.15	5.03	4.83	4.53	4.22	3.87	3.42
155	4.43	4.09	3.92	3.75	3.52	3.28	3.32	3.82	4.15	4.44	4.68	4.86	4.88	4.76	4.67	4.48	4.25	3.93	3.53
160	4.29	3.92	3.88	3.75	3.56	3.37	3.54	3.91	4.21	4.45	4.62	4.74	4.75	4.62	4.61	4.47	4.28	3.97	3.66
165	4.16	3.78	3.85	3.71	3.57	3.46	3.70	3.97	4.22	4.45	4.59	4.70	4.67	4.53	4.55	4.45	4.27	4.00	3.78
170	3.97	3.65	3.75	3.66	3.59	3.61	3.84	4.01	4.17	4.34	4.50	4.59	4.59	4.42	4.44	4.34	4.19	4.01	3.87
175	3.81	3.54	3.66	3.66	3.67	3.81	3.92	3.99	4.07	4.15	4.24	4.30	4.37	4.22	4.27	4.23	4.13	4.04	3.95
180	3.76	3.92	4.02	4.02	4.01	3.98	3.95	3.96	3.96	4.00	4.02	4.06	3.76	3.91	4.03	4.02	4.00	3.98	3.95

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--2

UNIT: cd

C(DEG) g (DEG)	285	300	315	330	345														
0	1936	1936	1936	1936	1936														
5	1923	1923	1925	1927	1929														
10	1889	1893	1901	1910	1917														
15	1836	1848	1866	1885	1899														
20	1765	1788	1819	1849	1870														
25	1677	1713	1758	1799	1826														
30	1573	1624	1682	1730	1755														
35	1455	1520	1587	1632	1652														
40	1327	1403	1469	1509	1530														
45	1190	1271	1332	1373	1396														
50	1047	1128	1184	1227	1248														
55	901	975	1030	1070	1090														
60	754	821	873	913	934														
65	608	672	722	763	785														
70	467	530	582	624	643														
75	335	405	459	497	512														
80	219	295	352	385	395														
85	127	207	262	288	295														
90	64.9	138	188	210	216														
95	29.4	86.0	129	151	156														
100	11.8	48.3	84.7	107	115														
105	9.02	22.2	52.3	73.2	82.1														
110	7.24	7.76	28.0	47.4	57.3														
115	5.91	6.19	11.8	27.6	37.2														
120	4.79	5.01	6.24	12.6	20.9														
125	3.97	4.13	5.10	7.28	9.43														
130	3.34	3.59	4.36	5.96	7.50														
135	3.05	3.41	3.94	4.89	6.21														
140	3.06	3.35	3.74	4.27	5.45														
145	3.15	3.39	3.64	3.99	4.83														
150	3.21	3.46	3.60	3.85	4.29														
155	3.27	3.51	3.68	3.81	4.03														
160	3.35	3.53	3.75	3.79	3.91														
165	3.43	3.55	3.69	3.81	3.86														
170	3.56	3.58	3.64	3.71	3.76														
175	3.82	3.69	3.67	3.69	3.76														
180	3.95	3.96	4.00	4.02	4.06														

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks: