


- 2 in 1 installation available (Recessed and surface mounted).
- Thermal conductive plastic housing, V-0 flame rating.
- Presettable 3CCT and dual power for option.
- Clips adjustable for cut-holes with different sizes.
- Driver built in , Integrated design.
- IP44 , Suitable for different application ,eg, hotel, shopping mall, office.

## LED Ceiling Downlight DLR1-300-DP3C

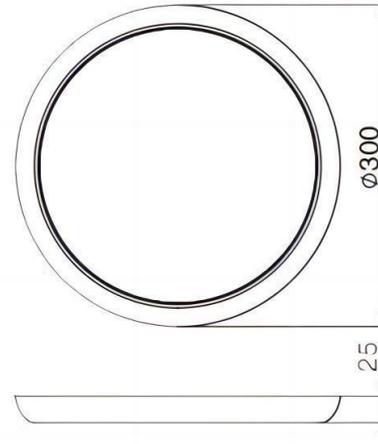

### Specification | Technical & Product Data:

LED TYPE	SMD 2835
Wattage	18 W /25W
Input	50/60 HZ
Power Factor	>0.9
Color Temperature	VW3000K / NW4000K / CW6000K
SDCM	<5
Light efficiency	typ. 100 lm/W
Luminous flux	18W: 1710lm / 1890lm / 1800lm 25W: 2125lm / 2375lm / 2250lm
CRI	>80
Cutout	φ150-270mm
Size	φ300-25mm
Lifespan L80/B10	50000 hrs at 25 °C
IP rate	IP44
ON/Off cycles	>50000
Working conditions	-20 °C - 45 °C
Material	PC
Body Color	White
Certification	CB CE ERP RoHS
Type of light source	<b>F</b>
Warranty	3 Years



### LED Driver

Driver	Internal driver
Input Voltage	220-240 V~

