



**UGR <19**  
**LED Spot Light**



No.47,XiangYuan Rd, Hangzhou  
Marktweg 31 D-47608 Geldern



+86-571-56017172  
+49(0)2831 974 8080



info@holux.net  
www.holux.net




# | Product Details



# | Advantages



Anti-glare, white version **UGR<19** ,  
black version **UGR<16**.

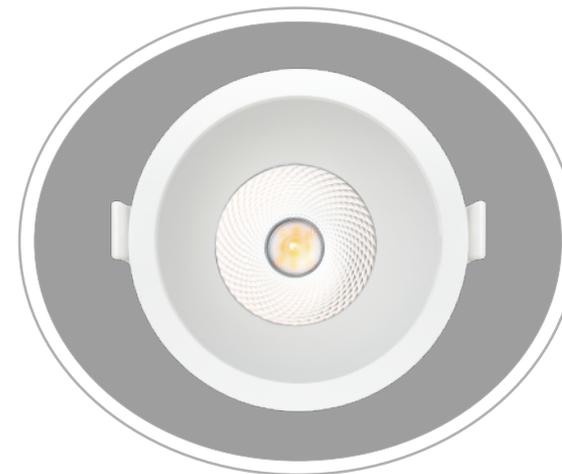

**LED SDCM<3**,  
good color consistency.







**IP44** Moisture Proof




**Driver built-in**, non-dimmable  
and triac dimmable for option.

# Specification

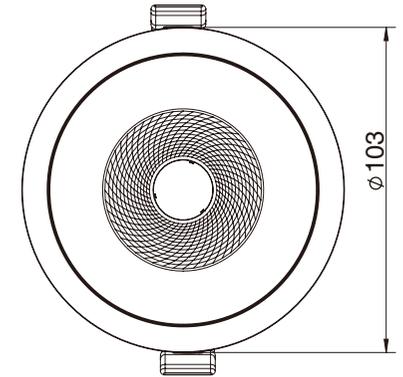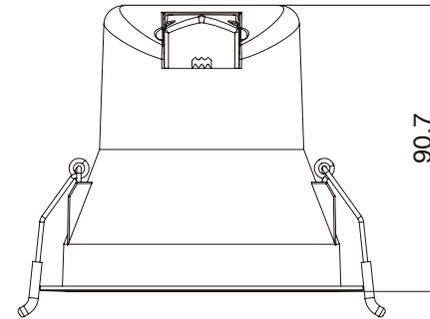

Product code	Size (mm)	Cutout (mm)	Wattage	Current	UGR	PF	Beam Angle	Lumen	CCT
DLF1-3W-6WW	φ 81*78.7	φ 68-73	6W	90mA	<19	>0.5	40°	400 lm	3000K
DLF1-3W-6NW	φ 81*78.7	φ 68-73	6W	90mA	<19	>0.5	40°	480 lm	4000K
DLF1-3B-6WW	φ 81*78.7	φ 68-73	6W	90mA	<16	>0.5	40°	380 lm	3000K
DLF1-3B-6NW	φ 81*78.7	φ 68-73	6W	90mA	<16	>0.5	40°	420 lm	4000K
DLF1-4W-9WW	φ 103*90.7	φ 90-95	9W	70mA	<19	>0.9	40°/ 60°	600 lm	3000K
DLF1-4W-9NW	φ 103*90.7	φ 90-95	9W	70mA	<19	>0.9	40°/ 60°	650 lm	4000K
DLF1-4B-9WW	φ 103*90.7	φ 90-95	9W	70mA	<16	>0.9	40°/ 60°	480 lm	3000K
DLF1-4B-9NW	φ 103*90.7	φ 90-95	9W	70mA	<16	>0.9	40°/ 60°	520 lm	4000K

# Package

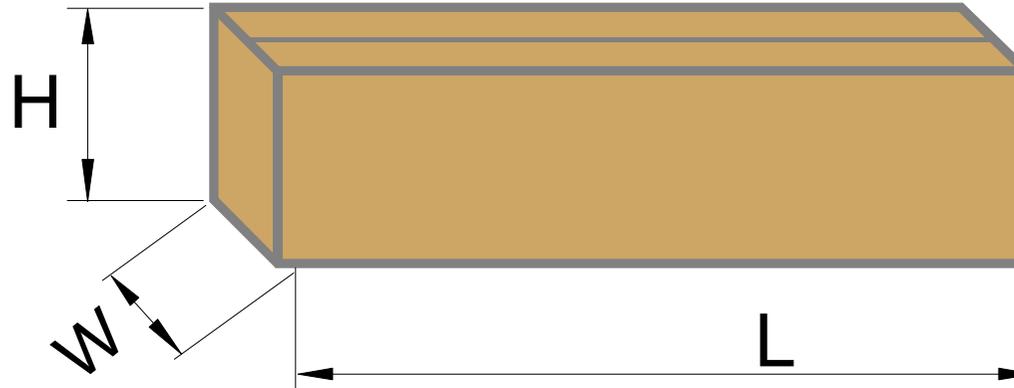

Package Way	Model	DLF1-3W-6WW	DLF1-4W-9WW
Innerbox Package	QTY/CTN	60	60
	Dimmension(mm)	440*267*415	550*320*470
	G.W(kg)	13.5	17.4