


## LED Downlight

DLU2-8-35CCT

- Reflector+Lens (UGR<19).
- Presetable tri-white type.
- Various ring frame for options.  
Replaceable: Round/Square/ Glass
- Surface mounted housing for options.
- Aluminum housing.
- Recessed and Surface installation.

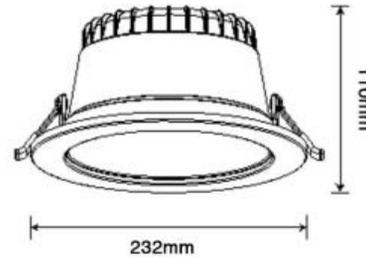

**100 lm/W**



### Specification | Technical & Product Data:

LED TYPE	SMD 2835
Wattage	35 W
Frequency	50-60 HZ
Power Factor	>0.9
Light color	Warm / Natural / Cold white
Color Temperature	3000K/4000K/5700K
SDCM	<5
Light efficiency	typ. 100 lm/W
Luminous flux	typ. 3500 lm
CRI	>80
Size	Ø232*110 / Ø195-210mm
Lifespan L80/B10	50000 hrs at 25 C
IP rate	IP64
ON/O ffcycles	>50000
Working conditions	-20 C - 45 C
Material	PC+Aluminum
Body Color	White
Certification	CE CB ERP RoHS
Type of light source	<b>F</b>
Warranty	5 Years
Beam Angle	60°

### LED Driver

Driver	<b>PHILIPS</b> CertaDrive
Input Voltage	220-240 V~
Output Voltage	30-42 V DC

**IP64 IK06 CE RoHS**