



HOT *PRODUCTS*

2026 PRODUCT
BROCHURE



HOLUX LIGHTING LIMITED

PROFESSIONAL LIGHTING SOLUTIONS TO
LIGHT UP NEW HORIZONS IN BUSINESS



INTRODUCTION

Holux Lighting is dedicated to delivering high-standard LED lighting solutions tailored for both office and industrial environments, meticulously designed to meet the standards of the European market.

At the heart of our success are reliable product quality, fast delivery, cost advantages, professional technical team and a set of well prepared certifications like, EMC, LVD, CE, CB, ENEC, D mark, ErP2.0 etc.



TUV ENEC / GS approval



Focus on European standards



High efficiency,
Eco-friendly



Inventory
in Germany



Free
test report



Small orders
acceptable



Price
advantage



2 days
fast delivery

CONTENTS

LED PANEL LIGHT



BP-A1/U1
P01-P03



BP-A1 U1 3CCT
P04-P05




BP-D1/D1 CCT
P06



AIO SPL-A1 U1/3CCT
P08-P09



SPL-U1 U2
P10-P11



RGBCW BP
P12-P13




HCL BP-S1/S2
P14-P15



IP65 BP-UIP/AIP
P16-P17



UD BP-D2
P18-P19




PL-A1/U1
P20-P22



IP65 PL-AIP
P23-P24



RP-A1/B2
P25-P26



MF/SMF/RMF
P27



ACCESSORIES
P28



DRIVER
P28

LED TUBE LIGHT



T8-A2/B2/C2/D1/E1
P29-P30



T8-S1
P31



T5-A1/C1
P32-P33

LED TRI-PROOF LIGHT



TP-F2/FS
P34-P35



TP-E2/G2
P36-P37



TP-B1/B2/B2 3CCT
P38-P39



TP-G3
P40-P41



TP-K/XL
P42



TP-C4
P43-P44



TP-C2/C3
P45-P46



TP-A4
P47-P48



BF-T8
P49-P50



BF-C1 3CCT/U1
P51-P52

LED CEILING LIGHT



M-A1/A2
P53-P54



M-2CCT
P55-P56



C-BM
P57-P58



C-AM
P59-P60



CLS
P61-P62

CONTENTS

LED DOWN LIGHT



DLU
P63-P64



DLR/DLS
P65-P66



DLH
P67-P68



DLF
P69-P70



DLM
P71-P72



DLC
P73



DLS
P73



PDL
P74-P77

LED HIGH BAY



HB-325
P79



HB-300
P79



HB-B2
P80



HB-B2 3CCT
P80



HB-B2 3W
P81



LF-A1 3CCT
P82-P83


LED LINEAR LIGHT



LL-U1
P84-P85



LL-A1
P86



LL-L1
P86



LL-A2
P87

LED BULB LIGHTS



A60
P88-P89



G45
P90



C37
P90



GU10
P91



FS-A60
P92



FS-G45
P92



FS-G37
P93




FS-GU10
P94

Backplane:
0,3mm power coated
backboard, comply with
ISO 2409: 2013.

Lens :
Mitsubishi PMMA lens,
kafuter glue, designed
for 20 years using.

Frame :
Thickened 6063 aluminum,
seamless welding. Surface
spraying, comply with ISO
2409: 2013.


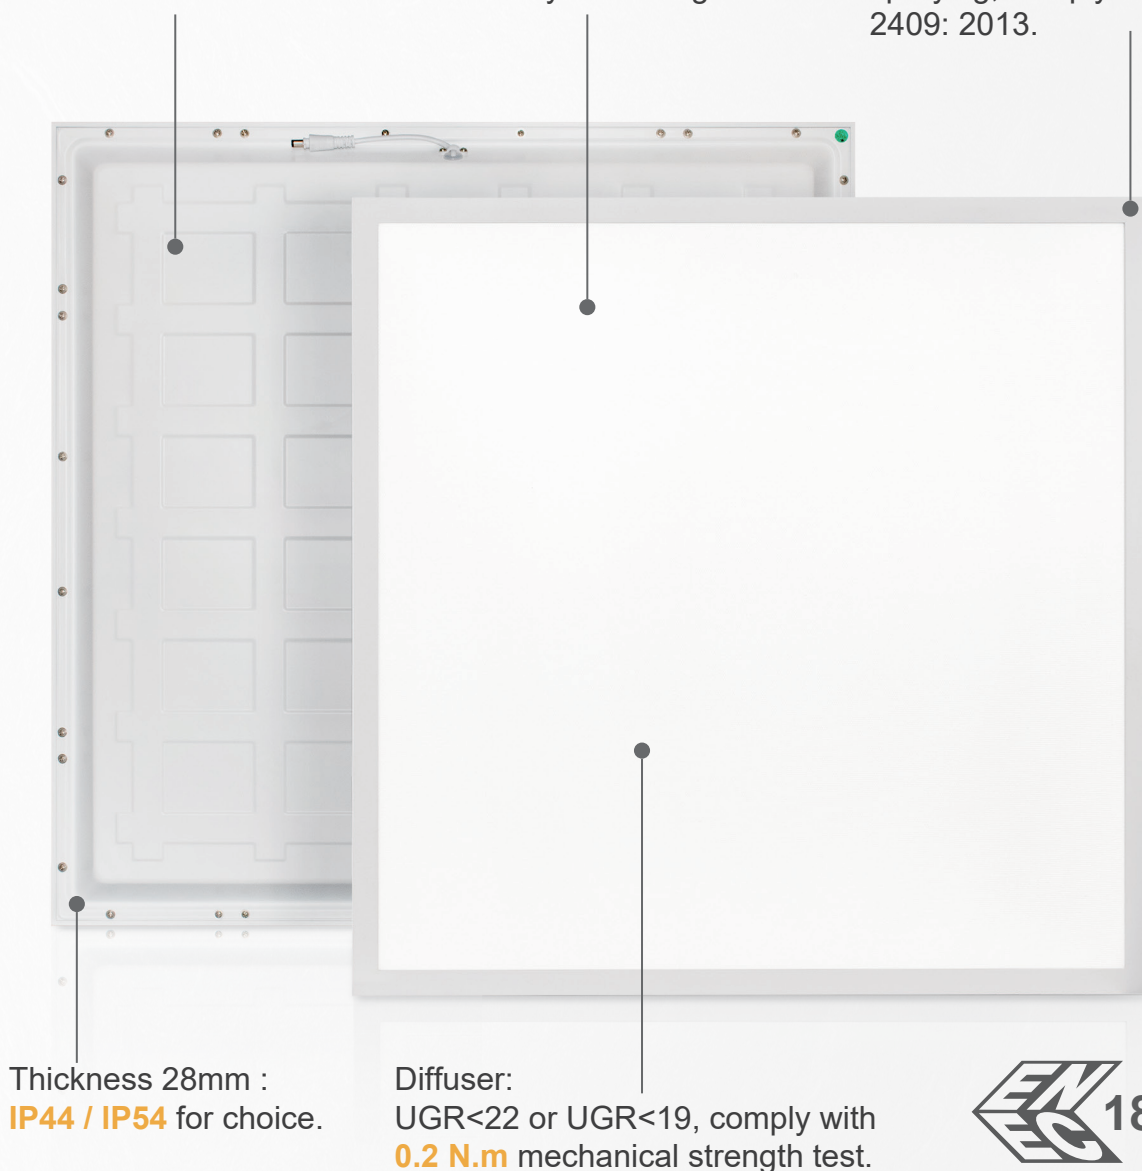


Thickness 28mm :
IP44 / IP54 for choice.

Diffuser:
UGR<22 or UGR<19, comply with
0.2 N.m mechanical strength test.





SLIM BACKLIT PANEL LIGHT

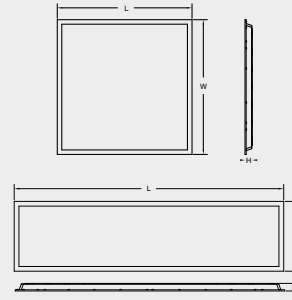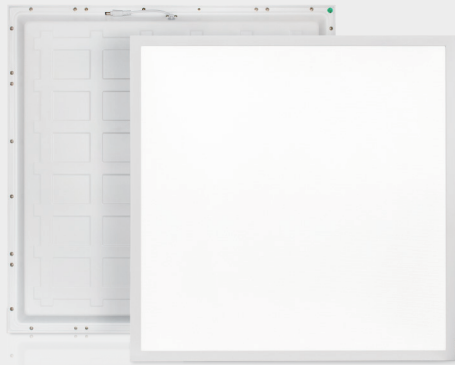

SLIM BACKLIT PANEL LIGHT




	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	UGR
	BP-6060-40A1	595×595×28	40W	100lm/w	4000lm	<22
	BP-6262-40A1	620×620×30	40W	100lm/w	4000lm	<22
	BP-30120-40A1	295×1195×30	40W	100lm/w	4000lm	<22
	BP-3030-24A1	295*295*32	24W	120lm/w	2800lm	<22
	BP-3060-24A1	295*595*32	24W	120lm/w	2800lm	<22
	BP-6060-36A1	595×595×28	36W	120lm/w	4320lm	<22
	BP-6262-36A1	620×620×30	36W	120lm/w	4320lm	<22
	BP-30120-36A1	295×1195×30	36W	120lm/w	4320lm	<22
	BP-60120-50A1	595*1195*32	50W	120lm/w	6000lm	<22
	BP-6060-34A1	595×595×28	34W	140lm/W	4760lm	<22
	BP-6262-34A1	620×620×30	34W	140lm/W	4760lm	<22
	BP-30120-34A1	295×1195×30	34W	140lm/W	4760lm	<22
	BP-6060-30A1	595×595×28	30W	160lm/W	4800lm	<22
	BP-6262-30A1	620×620×30	30W	160lm/W	4800lm	<22
	BP-30120-30A1	295×1195×30	30W	160lm/W	4800lm	<22
	BP-6060-25A1	595×595×28	25W	180lm/W	4500lm	<22
	BP-6262-25A1	620×620×30	25W	180lm/W	4500lm	<22
	BP-30120-25A1	295×1195×30	25W	180lm/W	4500lm	<22
	BP-6060-24A1	595×595×30	24W	200lm/W	4800lm	<22
	BP-6262-24A1	620×620×30	24W	200lm/W	4800lm	<22
	BP-30120-24A1	295×1195×30	24W	200lm/W	4800lm	<22

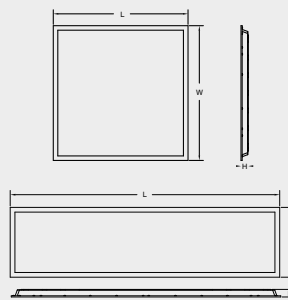

SLIM BACKLIT PANEL LIGHT



	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	UGR
	BP-6060-40U1	595×595×28	40W	100lm/w	4000lm	<19
	BP-6262-40U1	620×620×30	40W	100lm/w	4000lm	<19
	BP-30120-40U1	295×1195×30	40W	100lm/w	4000lm	<19
	BP-3030-24U1	295*295*32	24W	120lm/w	2800lm	<19
	BP-3060-24U1	295*595*32	24W	120lm/w	2800lm	<19
	BP-6060-36U1	595×595×28	36W	120lm/w	4320lm	<19
	BP-6262-36U1	620×620×30	36W	120lm/w	4320lm	<19
	BP-30120-36U1	295×1195×30	36W	120lm/w	4320lm	<19
	BP-60120-50U1	595*1195*32	50W	120lm/w	6000lm	<19
	BP-6060-34U1	595×595×28	34W	140lm/W	4760lm	<19
	BP-6262-34U1	620×620×30	34W	140lm/W	4760lm	<19
	BP-30120-34U1	295×1195×30	34W	140lm/W	4760lm	<19
	BP-6060-30U1	595×595×28	30W	160lm/W	4800lm	<19
	BP-6262-30U1	620×620×30	30W	160lm/W	4800lm	<19
	BP-30120-30U1	295×1195×30	30W	160lm/W	4800lm	<19
	BP-6060-25U1	595×595×28	25W	180lm/W	4500lm	<19
	BP-6262-25U1	620×620×30	25W	180lm/W	4500lm	<19
	BP-30120-25U1	295×1195×30	25W	180lm/W	4500lm	<19
	BP-6060-24U1	595×595×30	24W	200lm/W	4800lm	<19
	BP-6262-24U1	620×620×30	24W	200lm/W	4800lm	<19
	BP-30120-24U1	295×1195×30	24W	200lm/W	4800lm	<19



WW-NW-CW


CCT adjustable

3000K 4000K 6500K



Warm White White Cold White

Quick terminal DIP SWITCH

3CCT + 4 Power adjustable LED panel light



	Product Code	Size (mm)	Wattage	Light Efficiency	CRI	UGR	Beam Angle
	BP-6060-40A1-3CCT	595×595×28	36W-38W-40W	100lm/w	>80	<22	110°
	BP-30120-40A1-3CCT	295×1195×30	36W-38W-40W	100lm/w	>80	<22	110°
	BP-6060-36A1-3CCT	595×595×28	28W-32W-36W-40W	120lm/w	>90	<22	110°
	BP-30120-36A1-3CCT	295×1195×30	28W-32W-36W-40W	120lm/w	>90	<22	110°
	BP-6060-32A1-3CCT	595×595×28	24W-28W-32W-36W	140lm/W	>80	<22	110°
	BP-30120-32A1-3CCT	295×1195×30	24W-28W-32W-36W	140lm/W	>80	<22	110°
	BP-6060-28A1-3CCT	595×595×28	20W-24W-28W-32W	160lm/W	>80	<22	110°
	BP-30120-28A1-3CCT	295×1195×30	20W-24W-28W-32W	160lm/W	>80	<22	110°
	BP-6060-30A1-3CCT	595×595×28	24W-26W-28W-30W	180lm/W	>80	<22	110°
	BP-30120-30A1-3CCT	295×1195×30	24W-26W-28W-30W	180lm/W	>80	<22	110°

WW-NW-CW


CCT adjustable

3000K 4000K 6500K


Warm White White Cold White

Quick terminal DIP SWITCH


3CCT + 4 Power adjustable LED panel light



	Product Code	Size (mm)	Wattage	Light Efficiency	CRI	UGR	Beam Angle
	BP-6060-40U1-3CCT	595×595×28	28W-32W-36W-40W	120lm/w	>90	<19	90°
	BP-6262-40U1-3CCT	620×620×32	28W-32W-36W-40W	120lm/w	>90	<19	90°
	BP-30120-40U1-3CCT	295×1195×30	28W-32W-36W-40W	120lm/w	>90	<19	90°
	BP-60120-40U1-3CCT	595×1195×32	38W-42W-46W-50W	120lm/w	>90	<19	90°
	BP-6060-36U1-3CCT	595×595×28	24W-28W-32W-36W	140lm/W	>80	<19	90°
	BP-6262-36U1-3CCT	620×620×32	24W-28W-32W-36W	140lm/W	>80	<19	90°
	BP-30120-36U1-3CCT	295×1195×30	24W-28W-32W-36W	140lm/W	>80	<19	90°
	BP-6060-32U1-3CCT	595×595×28	20W-24W-28W-32W	160lm/W	>80	<19	90°
	BP-6262-32U1-3CCT	620×620×32	20W-24W-28W-32W	160lm/W	>80	<19	90°
	BP-30120-32U1-3CCT	295×1195×30	20W-24W-28W-32W	160lm/W	>80	<19	90°
	BP-6060-30U1-3CCT	595×595×28	24W-26W-28W-30W	180lm/W	>80	<19	90°
	BP-6262-30U1-3CCT	620×620×32	24W-26W-28W-30W	180lm/W	>80	<19	90°
	BP-30120-30U1-3CCT	295×1195×30	24W-26W-28W-30W	180lm/W	>80	<19	90°

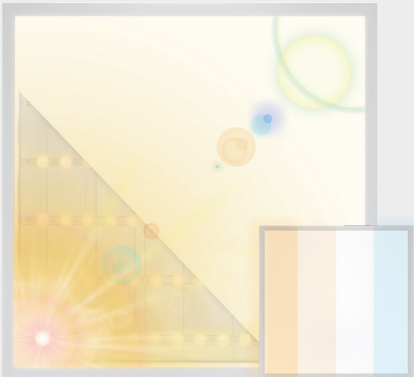


**4CCT adjustable
Full spectrum LED panel light**

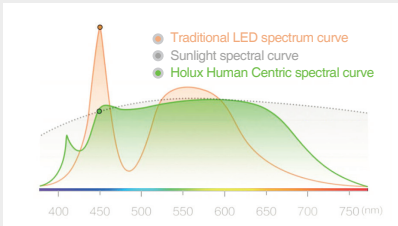


CCT adjustable
3000K 4000K 5000K 6500K
Warm White White Cold White

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	UGR	CRI
	BP-6060-42D1 CCT	595*595*28	40W	100 lm/W	4000 lm	<19	typ 97
	BP-6262-42D1 CCT	620*620*28	40W	100 lm/W	4000 lm	<19	typ 97
	BP-30120-42D1 CCT	295*1195*28	40W	100 lm/W	4000 lm	<19	typ 97

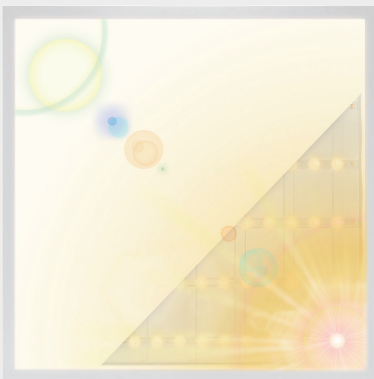

**Human Centric /
Less blue light /
Full spectrum LED panel light**

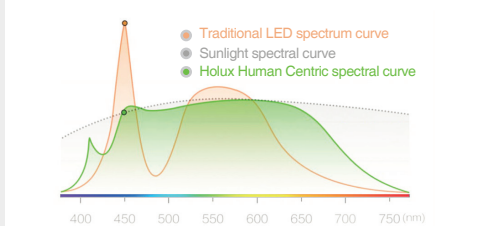

- Increased adoption of human-centric LED spectrums, Reduced intensity in short wavelength blue, improve melatonin levels, circadian rhythms, human health
- Light spectrum designed to mimic the sun, Natural and vivid color rendering solution
- R1 to R15 all >90, excellent TM30 with high Rf and Rg values

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	UGR	CRI
	BP-6060-42D1	595*595*25	40W	100 lm/W	4000 lm	<19	typ 97
	BP-6262-42D1	620*620*32	40W	100 lm/W	4000 lm	<19	typ 97
	BP-30120-42D1	295*1195*27	40W	100 lm/W	4000 lm	<19	typ 97



**EU 1.5 meter cable
with Euro plug**



**FR Safety Wire and
Fast Connection**



**UK TPA, TPB diffuser
and Emergency Battery**



**DE 620x620mm
size Panel Light**


**FOR DIFFERENT
MARKETS**

Integrated driver

All in one panel



Fast connection

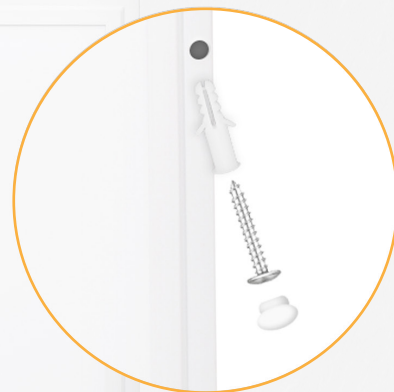

Surface and recessed installation





ALL IN ONE PANEL LIGHT



All in one panel light




CE	RoHS	IP20	IK03	5-year warranty	YELLOW FREE™	SMD 2835	γ _{MAX} -25 - 45
UK CA	50000 ON / OFF	50000hrs	FLICKER-FREE	4000K CCT	240V / 220V AC/DC	Ra ≥ 90	>0.9 PF





Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	UGR	Beam Angle
 SPL-6060-34A1	595×595×40	34W	120lm/w	4080lm	<22	110°
 SPL-30120-34A1	295×1195×40	34W	120lm/w	4080lm	<22	110°
 SPL-6060-34U1	595×595×40	34W	120lm/w	4080lm	<19	90°
 SPL-30120-34U1	295×1195×40	34W	120lm/w	4080lm	<19	90°




3CCT
All in one panel light





CE	RoHS	IP20	IK03	5-year warranty	YELLOW FREE™	SMD 2835	γ _{MAX} -25 - 45
UK CA	50000 ON / OFF	50000hrs	FLICKER-FREE	6000K 4000K 3000K CCT	240V / 220V AC/DC	Ra ≥ 90	>0.9 PF


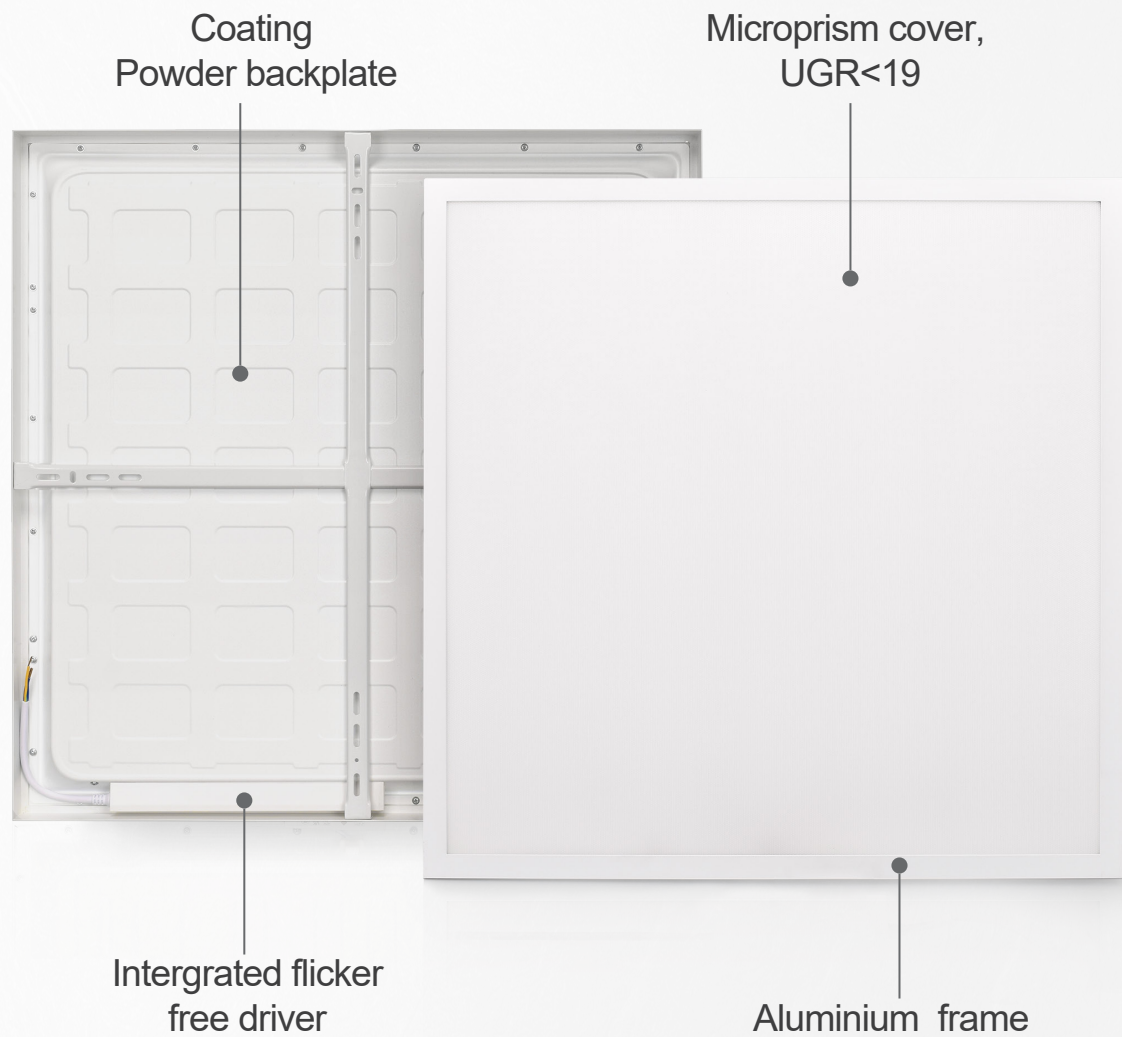
Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	UGR	Beam Angle
 SPL-6060-34A1-3CCT	595×595×40	30W 34W 38W	120lm/w	3600lm 4080lm 4560lm	<22	110°
 SPL-30120-34A1-3CCT	295×1195×40	30W 34W 38W	120lm/w	3600lm 4080lm 4560lm	<22	110°
 SPL-6060-34U1-3CCT	595×595×40	30W 34W 38W	120lm/w	3600lm 4080lm 4560lm	<19	90°
 SPL-30120-34U1-3CCT	295×1195×40	30W 34W 38W	120lm/w	3600lm 4080lm 4560lm	<19	90°





SURFACE PANEL LIGHT



Surface Panel Light

CE	RoHS	IP20	IK03	5-year warranty	YELLOW FREE™	SMD 2835	θ _F MAX -25 - 45
UK CA	50000 ON / OFF	50000hrs	FLICKER-FREE	6500K 4000K CCT	240V 200V AC/DC	Ra ≥ 80 CRI	>0.9 PF



Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	UGR	Beam Angle
 SPL-6060-40U1	600*600*38	40W	120lm/w	4080lm	<19	90°
 SPL-30120-40U1	1200*300*38	40W	120lm/w	4080lm	<19	90°



Quick Installation Surface Panel Light



CE	RoHS	UK CA	IP20	IK02	5-year warranty	YELLOW FREE™	SMD 2835	θ _F MAX -25 - 45
100 lm/w	50000 ON / OFF	50000hrs	FLICKER-FREE	6500K 4000K CCT	240V 200V AC/DC	Ra ≥ 80 CRI	>0.9 PF	

Product Code	Size (mm)	Wattage	Luminous Flux	UGR	Beam Angle	Version
 SPL-30150-40U1	300*1500*30	40W	4000lm	<19	90°	Side-emitting
 SPL-30150-40U2	300*1500*30	40W	4000lm	<19	90°	Backlit

Slim Smart setting by App+BLE
or remote container design

Intelligent color
mixing function




TIGIDIGITAL

MIBOXER® | Mi·Light
Subordinate New Brand

RGBCW full color dimming



**RGBCW
LED PANEL LIGHT**

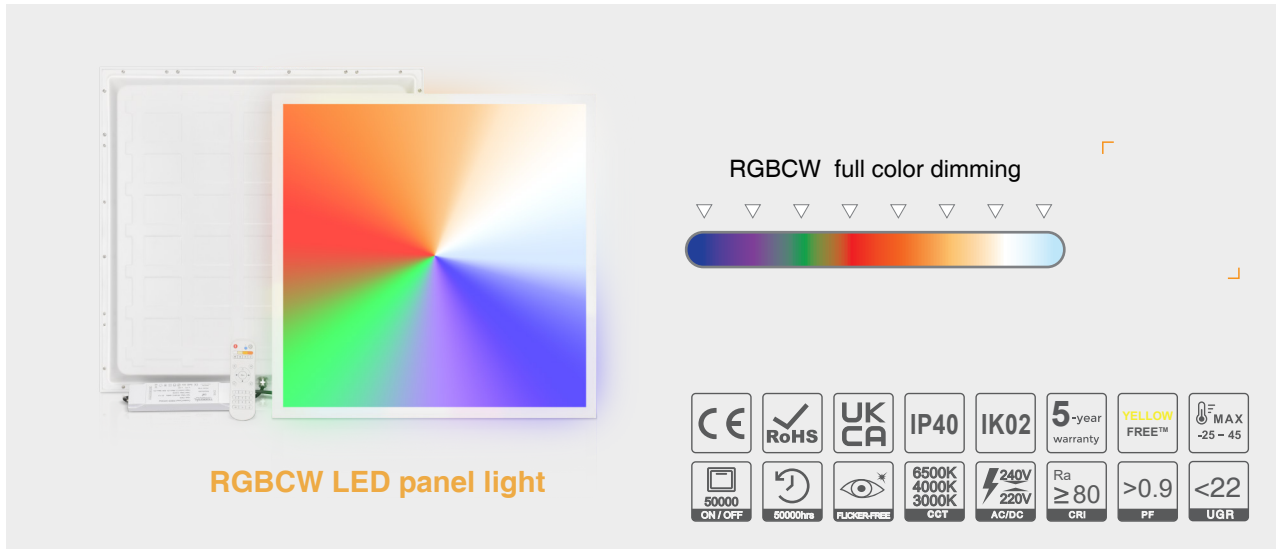

RGBCW LED panel light

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Platform
	BP-6060-40RGCCT	595*595*28	RGB:8W CCT:40W	100 lm/W	4000lm	TIGIDIGITAL
	BP-30120-40RGCCT	295*1195*28	RGB:8W CCT:40W	100 lm/W	4000lm	TIGIDIGITAL
	BP-6262-40RGCCT	620*620*28	RGB:8W CCT:40W	100 lm/W	4000lm	TIGIDIGITAL
	BP-6060-40RGCCT	595*595*28	RGB:8W CCT:40W	100 lm/W	4000lm	MiBOXER
	BP-30120-40RGCCT	295*1195*28	RGB:8W CCT:40W	100 lm/W	4000lm	MiBOXER
	BP-6262-40RGCCT	620*620*28	RGB:8W CCT:40W	100 lm/W	4000lm	MiBOXER

Quick and easy installation,
light group function


Energy saving

Embedded sensor


Plug on/off sensor

Maintenance and energy
consumption reports from
anywhere









Ideal for modernizing existing
buildings where no rewiring is
needed

SILVAIR GEBC CASAMBI 


HUMAN CENTRIC
SMART PANEL LIGHT





Embedded sensor


























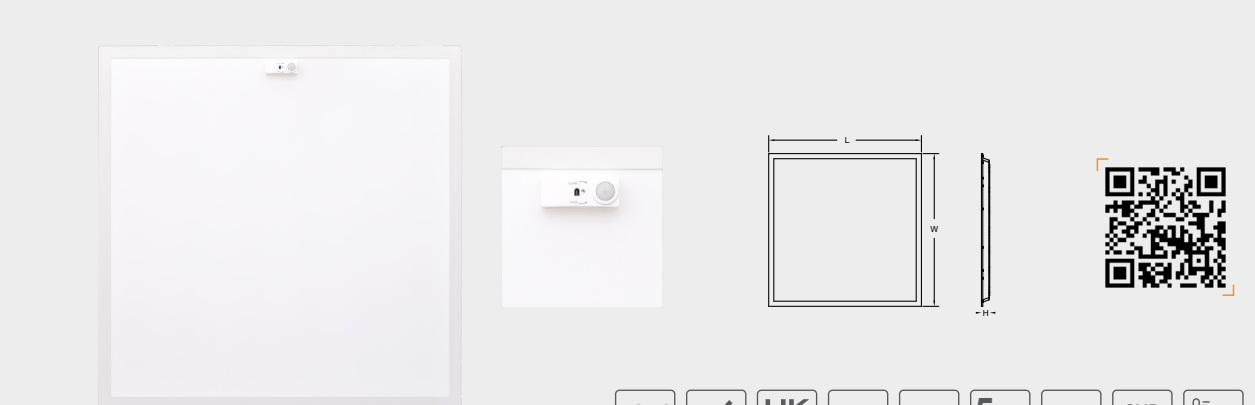



















Product code	Size (mm)	Wattage	CCT	Luminous Flux	Product code	Sensor	Platform
 BP-6060-40S1	595*595*30	40W	3000K 4000K 6500K	4800lm	0-10V Driver	Bluetooth PIR Sensor Daylight Sensor	
							GEBE
							SILVAIR
							CASAMBI
 BP-6060-40S1-3CCT	595*595*30	40W	3000K-6500K	4800lm	0-10V Driver	Bluetooth PIR Sensor Daylight Sensor	
							GEBE
							SILVAIR
							CASAMBI
 BP-6060-40S1-3CCTR	595*595*30	40W	3000K-6500K	4800lm	0-10V Driver	PIR Sensor Daylight Sensor	Remote Control



Plug on/off sensor

Product code	Size (mm)	Wattage	CCT	Luminous Flux	Product code	Sensor	Platform
 BP-6060-40S2	595*595*30	40W	3000K 4000K 6500K	4800lm	0-10V Driver	Bluetooth PIR Sensor Daylight Sensor	
							GEBE
							SILVAIR

Waterproof Brass
Cable Gland

**Cost-
Effective**


Breathing Valve,
Air in and out

Internal High
efficiency driver

IP65 WATERPROOF LED PANEL LIGHT



	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	UGR	Beam Angle
	BP-6060-40UIP	595×595×32	40W	120 lm/W	4800 lm	<19	90°
	BP-6262-40UIP	620×620×32	40W	120 lm/W	4800 lm	<19	90°
	BP-30120-40UIP	295×1195×32	40W	120 lm/W	4800 lm	<19	90°
	BP-6060-40IP	595×595×32	40W	120 lm/W	4800 lm	<22	110°
	BP-6262-40IP	620×620×32	40W	120 lm/W	4800 lm	<22	110°
	BP-30120-40IP	295×1195×32	40W	120 lm/W	4800 lm	<22	110°

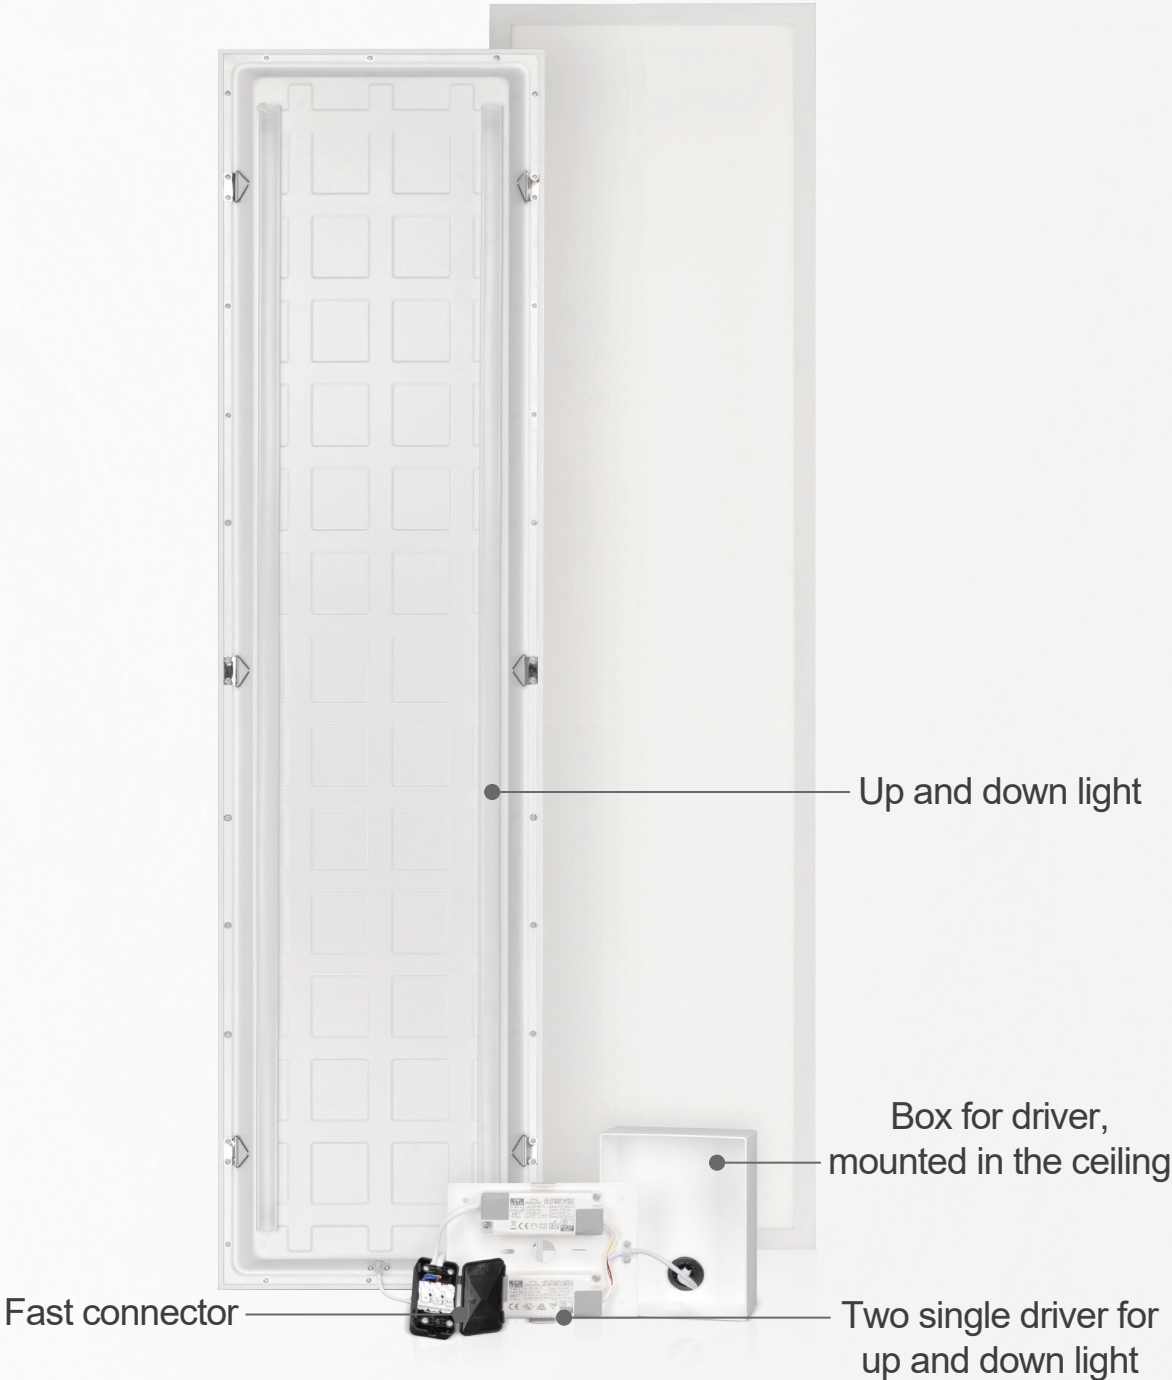

UP-DOWN LED BACKLIT PANEL LIGHT



UP-Down LED backlit Panel light



CE

RoHS

IP20

IK02

5-year warranty

YELLOW FREE™

SMD 2835

T_{MAX} -25 - 45

50000 ON/OFF

60000hrs

FLICKER-FREE



240V AC/DC 220V


<19 UGR

Ra ≥80 CRI



>0.9 PF

Product code	Size (mm)	Wattage	Luminous Flux	Light Efficiency	CCT	DRIVER
 BP-30120-40D2	295x1195x34	Up light 16W <small>(20W, 24W, 28W, 32W optional)</small>	140Lm/W	Up light 2240Lm	3000K 4000K 6000K	2* External SELV EAGLERISE on/off driver
		Down light 34W	140Lm/W	Down light 4760Lm		

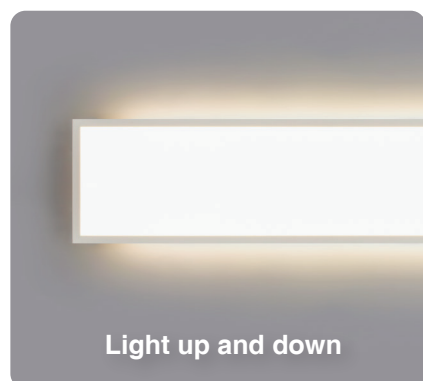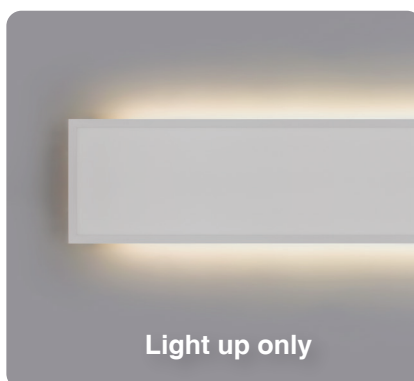

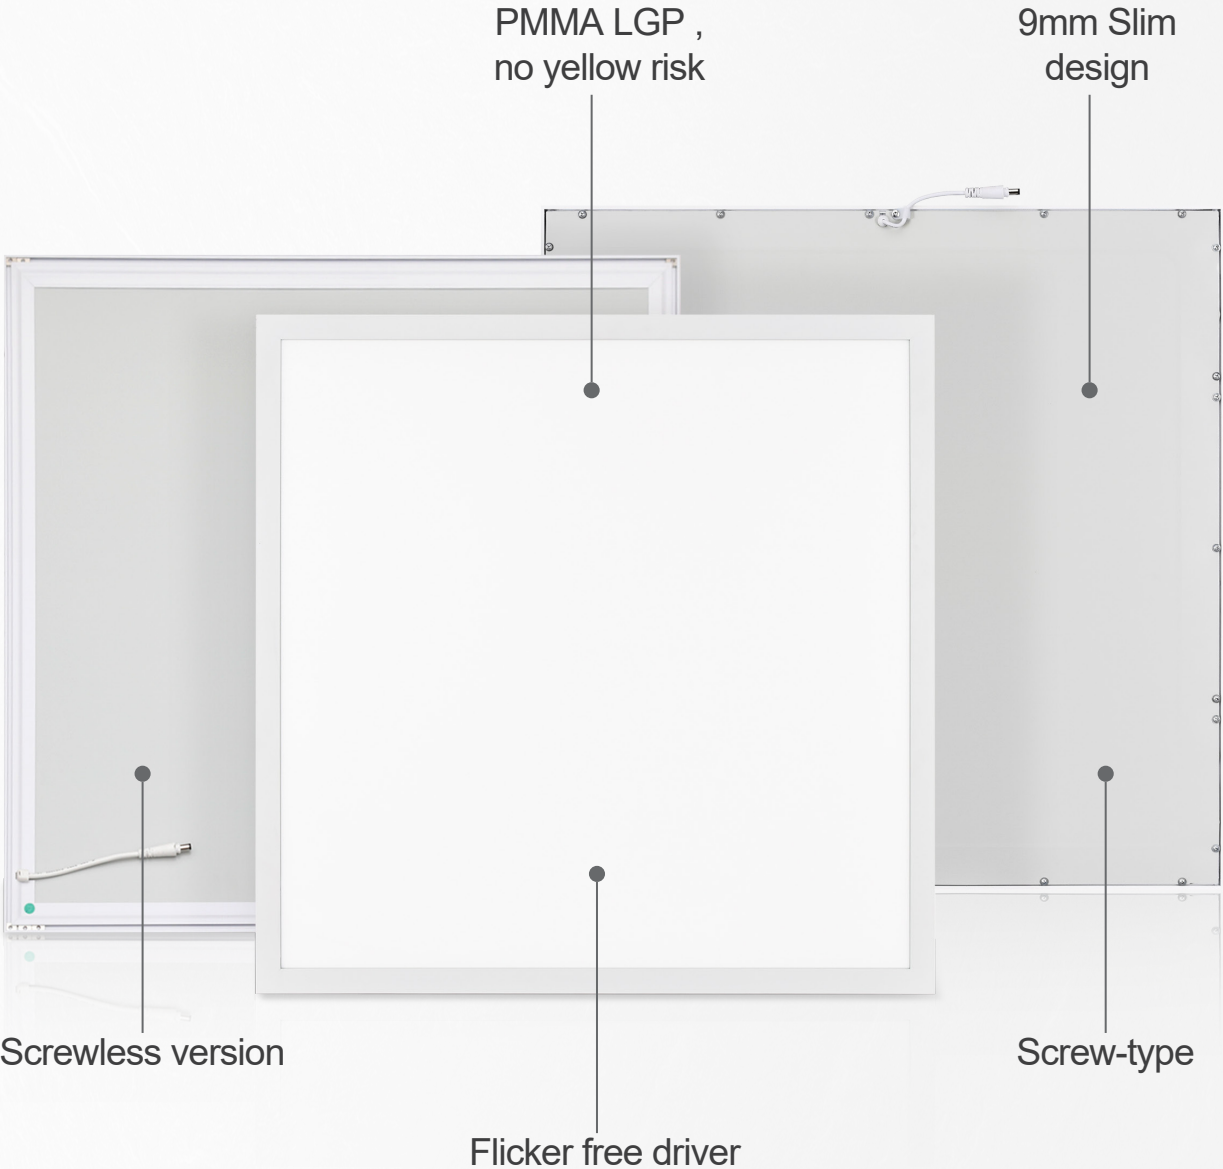


SIDE-EMITTING LED PANEL LIGHT

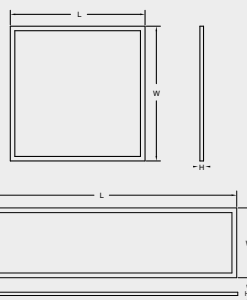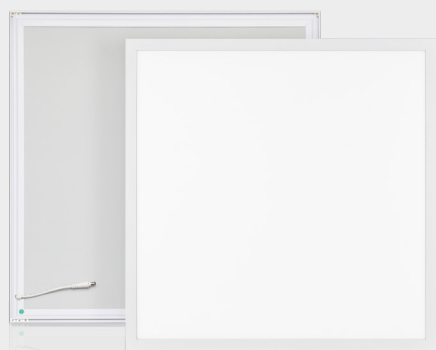

SCREWLESS SIDE-EMITTING LED PANEL LIGHT




	Product Code	Size (mm)	Wattage	Light Efficiency	Type	UGR	Beam Angle
	PL-3030-18A1	295* 295*10	18 W	100 lm/W	SMD4014	≤22	110°
	PL-3060-22A1	595*295*10	22 W	100 lm/W	SMD4014	≤22	110°
	PL-6060-38A1	595*595*9	38 W	100 lm/W	SMD4014	≤22	110°
	PL-30120-38A1	1195*295*9	38 W	100 lm/W	SMD3014	≤22	110°
	PL-60120-64A1	1195*595*10	64 W	100 lm/W	SMD3014	≤22	110°
	PL-6060-34U1	595*595*9	34 W	115 lm/W	SMD3014	≤19	90°
	PL-30120-34U1	1195*295*9	34 W	115 lm/W	SMD3014	≤19	90°
	PL-6060-32U1	595*595*10	32W	120 lm/W	SMD3014	≤19	90°
	PL-6262-32U1	620*620*10	32W	120 lm/W	SMD3014	≤19	90°
	PL-6060-24A1	595* 595*9	24W	150 lm/W	SMD3014	≤22	110°
	PL-30120-24A1	1195*295*9	24W	150 lm/W	SMD3014	≤22	110°
	PL-6060-24U1	595*595*9	24W	145 lm/W	SMD3014	≤19	90°
	PL-12030-24U1	1195*295*9	24W	145 lm/W	SMD3014	≤19	90°

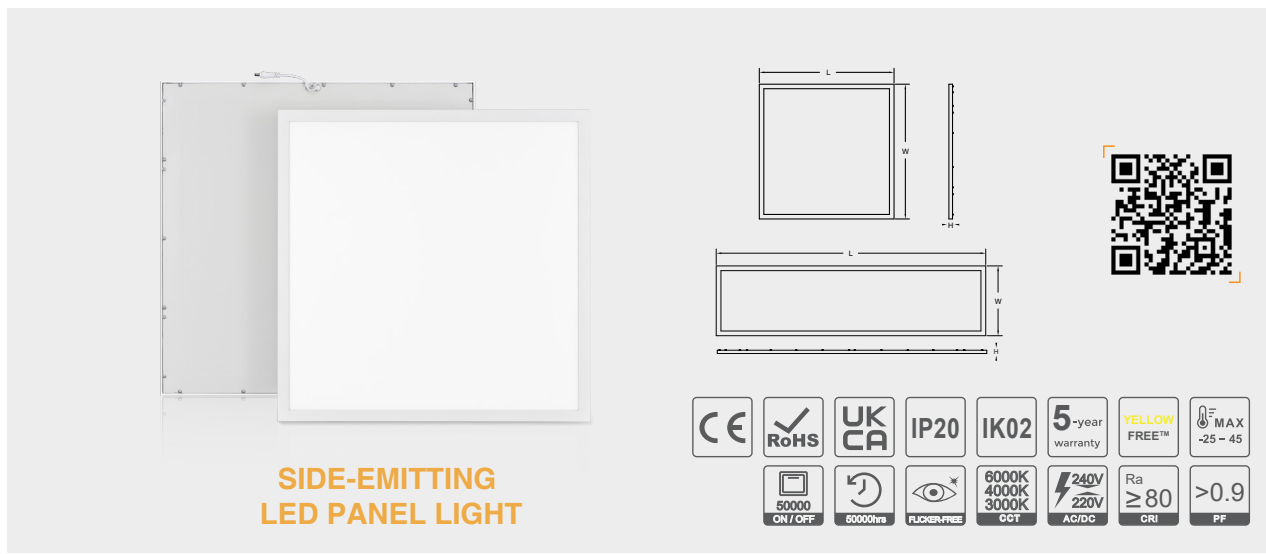




**SIDE-EMITTING
LED PANEL LIGHT**

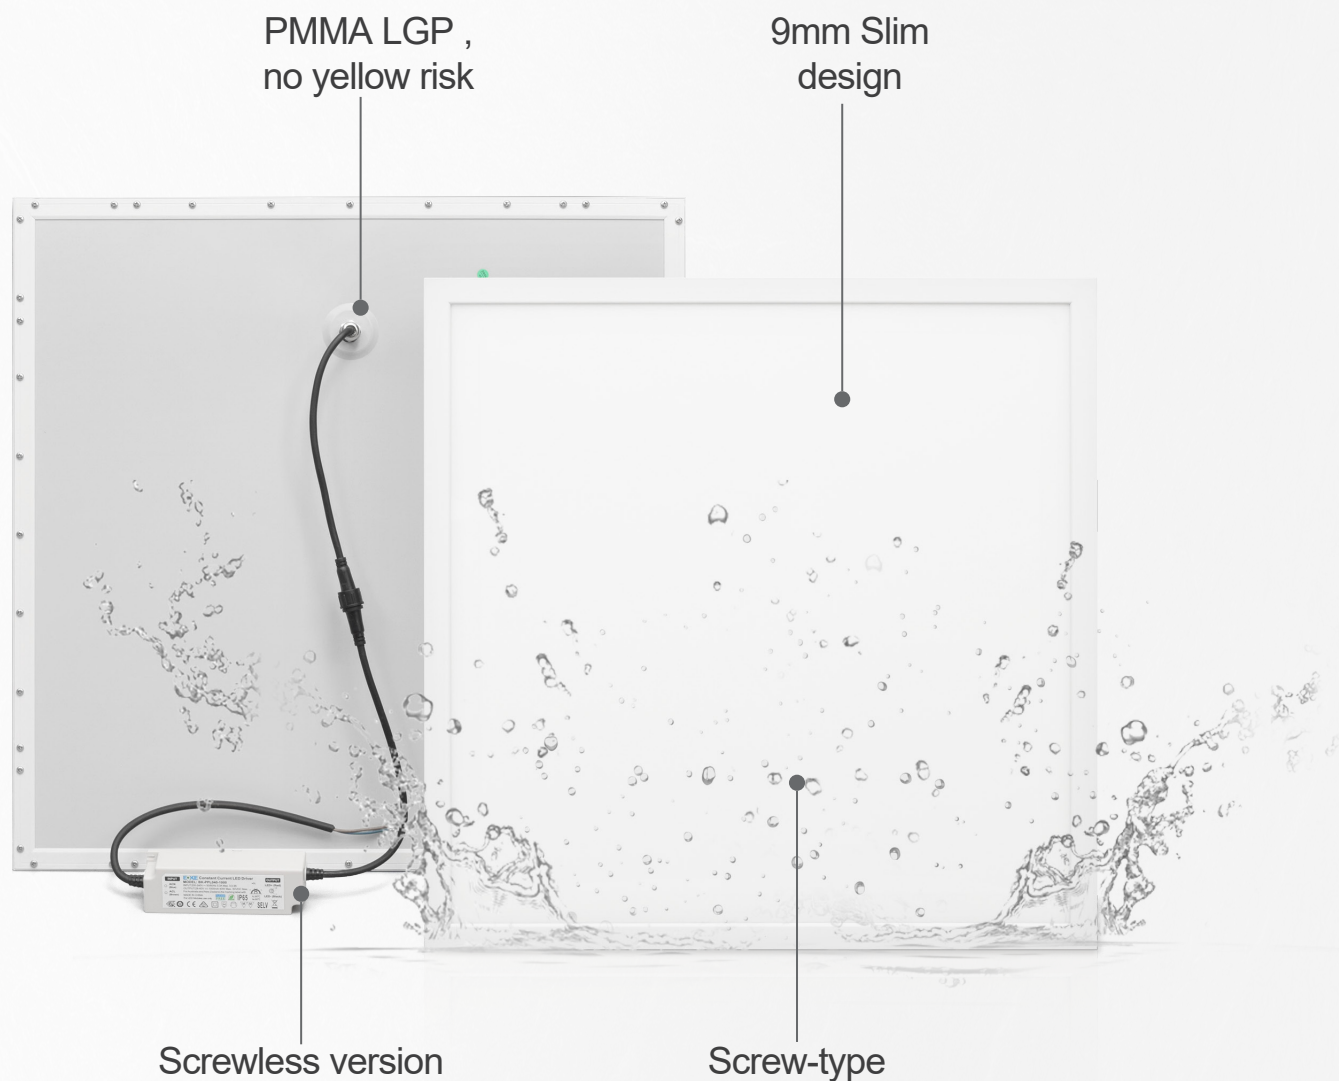	Product Code	Size (mm)	Wattage	Light Efficiency	Type	UGR	Beam Angle
	PL-6060-40A1	595*595*9	40 W	100 lm/W	SMD4014	<22	110°
	PL-6262-40A1	620*620*9	40 W	100 lm/W	SMD4014	<22	110°
	PL-12030-40A1	1195*295*9	40 W	100 lm/W	SMD4014	<22	110°
	PL-6060-36U1	595*595*9	36 W	120 lm/W	SMD3014	<19	90°
	PL-6262-36U1	620*620*9	36 W	120 lm/W	SMD3014	<19	90°
	PL-12030-36U1	1195*295*9	36 W	120 lm/W	SMD3014	<19	90°
	PL-6060-28U1	595*595*9	28 W	150 lm/W	SMD3014	<19	90°
	PL-6262-28U1	620*620*9	28 W	150 lm/W	SMD3014	<19	90°
	PL-12030-28U1	1195*295*9	28 W	150 lm/W	SMD3014	<19	90°
	PL-6767-40U1	670*670*9	40 W	120 lm/W	SMD3014	<19	90°
	PL-30150-40U1	1495*295*9	40 W	120 lm/W	SMD3014	<19	90°



IP65 SIDE-EMITTING LED PANEL LIGHT



Product Code	Size (mm)	Wattage	Light Efficiency	Type	Beam Angle
 PL-6060-40AIP	595*595*13	40 W	100 lm/W	SMD4014	90°
 PL-30120-40AIP	1195*295*13	40 W	100 lm/W	SMD4014	90°
 PL-60120-40AIP	1195*595*13	60 W	100 lm/W	SMD4014	90°

3 different reflector cup color options

4 different reflector cup color options

Modules can be easily replaced to meet energy-saving

UGR < 13 High luminous efficacy

UGR < 13 High luminous efficacy

Up to 200 lm/w

Bat-wing Lighting

Light distribution diagram showing beam spread and candela values. The diagram includes a scale from 0 to 90 degrees and candela values: 925, 1850, 2778, 3703, 4630. Legend: C0-C180 (blue), C90-C270 (red). Average Diffuse Angle(50%): 70.7°. Unit: cd.

REFLECTION PANEL LIGHT



Modules can be easily replaced to meet energy-saving

3 different reflector cup color options

**Up to 200 lm/w
Reflection panel light**

CE	RoHS	IP20	IK02	5-year warranty	DALI option	YELLOW FREE™	SMD 2835	MAX -25 - 45
Up to 200lm/W	50000 ON / OFF	50000hrs	FLICKER-FREE	4000K CCT	240V/220V AC/DC	80° BEAM ANGLE	Ra ≥ 80	>0.9 PF

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	UGR
	RP-6060-36B2	595x595x15	28W	200 lm/W	5600 lm	<13
	RP-6262-36B2	620x620x15	28W	200 lm/W	5600 lm	<13
	RP-30120-36B2	295x1195x15	28W	200 lm/W	5600 lm	<13



**Bat-wing Lighting
Reflection panel light**

White reflector-cup
Beam Angle : 70.4°
Up to 140LM/W


Black reflector-cup
Beam Angle : 66.6°
Up to 70LM/W

BRIGHT
Reflective Cup BRIGHT
Beam Angle : 57.3°
Up to 130LM/W

MATTE
Silver Reflective Cup
Beam Angle : 63.9°
Up to 140LM/W


CE	RoHS	IP20	IK02	5-year warranty	DALI option	YELLOW FREE™	SMD 2835	MAX -25 - 45
Up to 140lm/W	50000 ON / OFF	50000hrs	FLICKER-FREE	4000K CCT	240V/220V AC/DC	90° BEAM ANGLE	Ra ≥ 80	>0.9 PF

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	UGR
	RP-6060-36A1	595x595x28	28W	140 lm/W	3920 lm	<13
	RP-6262-36A1	620x620x28	28W	140 lm/W	3920 lm	<13
	RP-30120-36A1	295x1195x28	28W	140 lm/W	3920 lm	<13

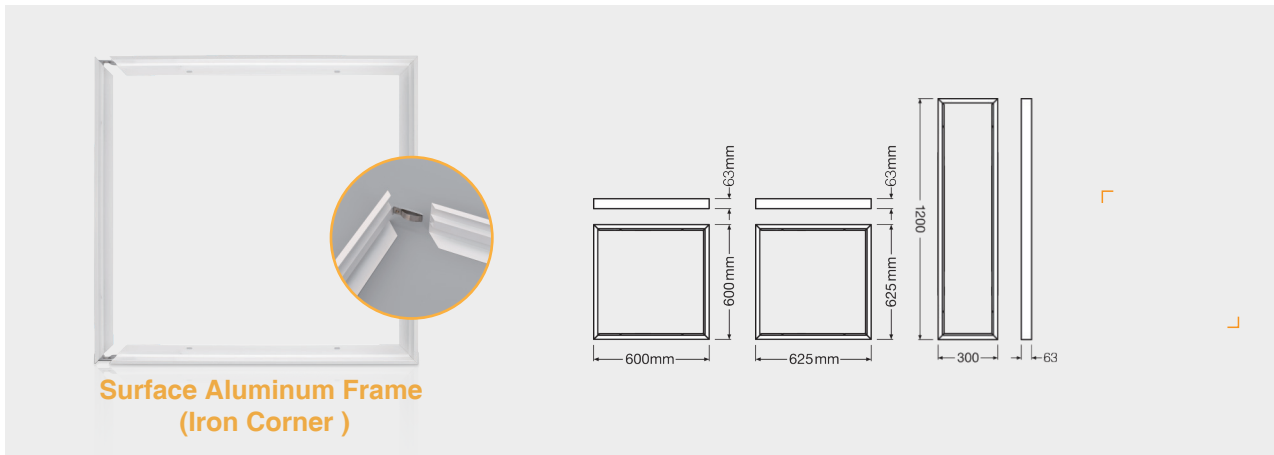


**Surface Aluminum Frame
(Iron Corner)**

Model	MF-6060-63A	MF-6262-63A	MF-30120-63A
Size	600*600*63mm	625*625*63mm	300*1200*63mm

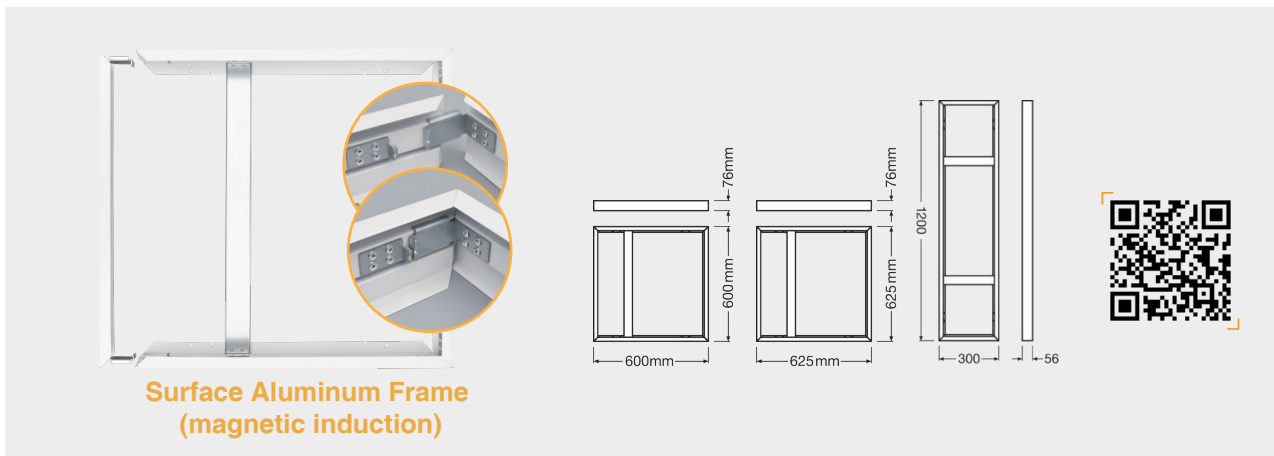

**Surface Aluminum Frame
(magnetic induction)**

Model	SMF-6060-Pro	SMF-6262-Pro	SMF-30120-Pro
Size	600*600*76mm	625*625*76mm	300*1200*76mm

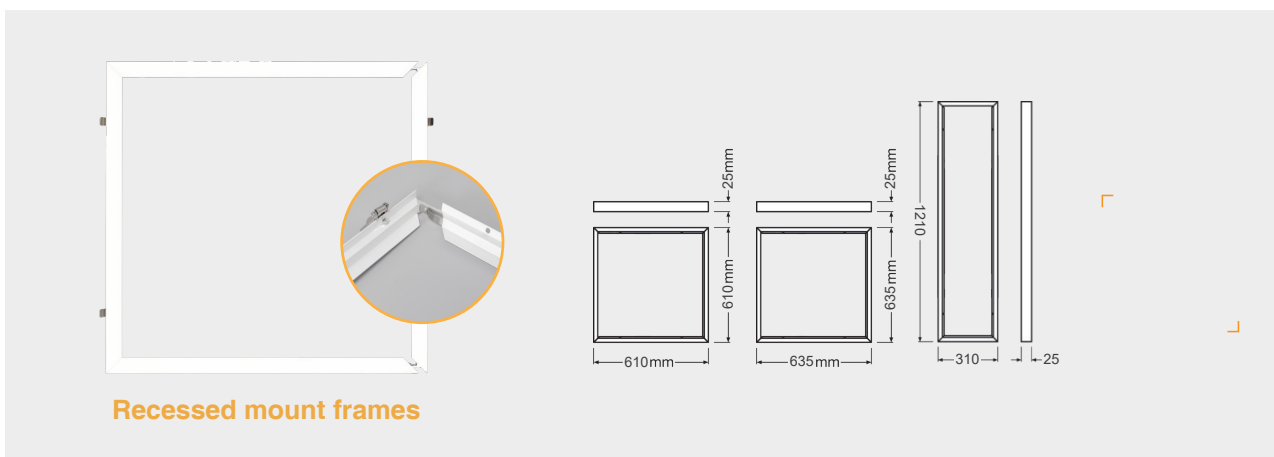

Recessed mount frames

Model	RMF-6060-25A	RMF-6262-25A	RMF-30120-25A
Size	610*610*25mm	635*635*25mm	310*1210*25mm

LED DRIVER:ON-OFF



PHILIPS



LIFUD




STARSENSE




EAGLERISE

LED DRIVER:DALI



EAGLERISE
FLS-42-1050 DALI-2 LD PRO

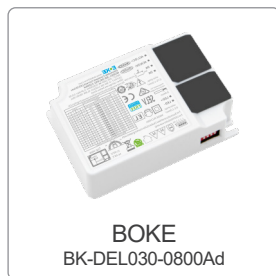


BOKE
BK-DEL030-0800Ad

LED DRIVER:0-10V




LIFUD
LF-GSD040YC




BOKE
BK-DEL030-B0800Ad

LED DRIVER:Dimming and toning



MicroMile
MM-2092C-0750-BMP4N0




EAGLERISE
FLS-38-900 CCT LS ADV

LED DRIVER:Emergency



STREAMER
IFR18650-1500



merrytek
KE026 HB SRIES


LED Panel Mounting Parts



spring buckle



Y-shaped hanging rope

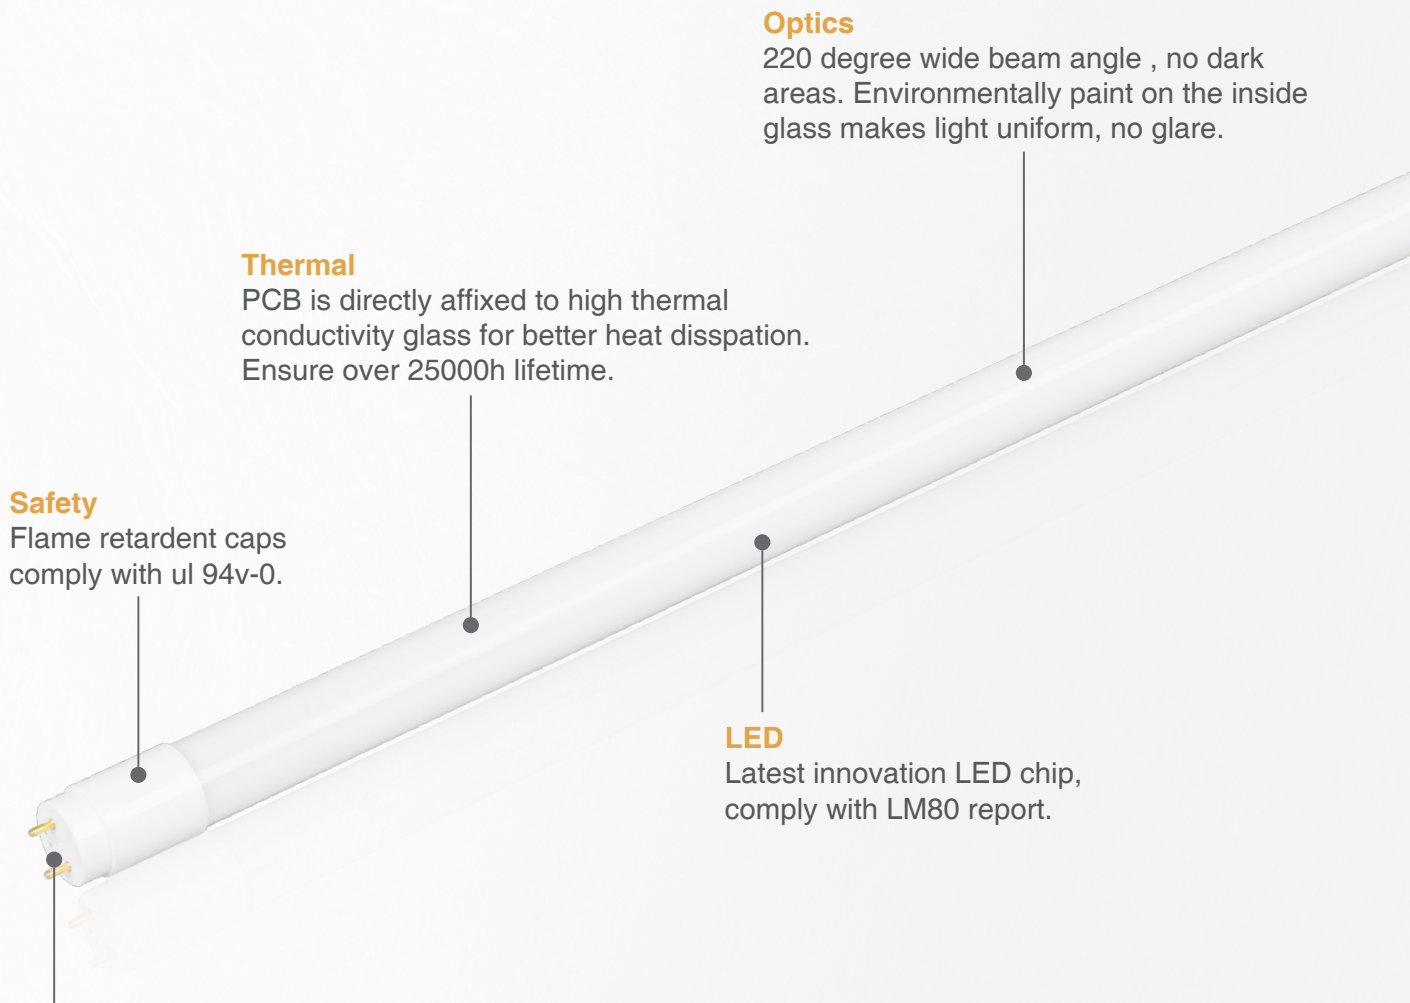

Safety

Flame retardant caps comply with UL 94V-0.

Thermal

PCB is directly affixed to high thermal conductivity glass for better heat dissipation. Ensure over 25000h lifetime.

Optics

220 degree wide beam angle, no dark areas. Environmentally paint on the inside glass makes light uniform, no glare.

LED

Latest innovation LED chip, comply with LM80 report.




Flicker free driver

Strictly follow IEC safety and EMC requirements, Enhanced safety with built-in protection circuit. Pst LM <math>< 1.0</math>, SVM <math>< 0.05</math>.

Complying with IEC TR 61547-1: 2020, coping with mains voltage fluctuation.

ErP
(EU) 2019/2020




T8 LED Glass Tube

T8 LED Glass Tube

- 3-year warranty
- SMD 2835
- GLASS
- 50000 ON/OFF
- 30000hrs
- IP20
- 6500K CCT
- 240V AC/DC
- Ra ≥ 80
- >0.9 PF
- 220° BEAM ANGLE

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux
	T8-L12-12A2	Φ26×1212	12W	210 lm/W	2520 lm
	T8-L15-17A2	Φ26×1512	16W	210 lm/W	3360 lm
	T8-L06-09B2	Φ26×602	9W	175 lm/W	1575 lm
	T8-L12-15B2	Φ26×1212	15W	185 lm/W	2775 lm
	T8-L15-20B2	Φ26×1512	20W	185 lm/W	3700 lm
	T8-L06-7.5C2	Φ26×602	9W	160 lm/W	1440 lm
	T8-L12-15C2	Φ26×1212	15W	160 lm/W	2400 lm
	T8-L15-20C2	Φ26×1512	20W	160 lm/W	3200 lm








T8 LED Glass Tube

- 3-year warranty
- SMD 2835
- GLASS
- 50000 ON/OFF
- 30000hrs
- IP20
- 6500K CCT
- 240V AC/DC
- Ra ≥ 80
- >0.5 PF
- 220° BEAM ANGLE

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux
	T8-L06-09D1	Φ26×602	9W	135 lm/W	1215 lm
	T8-L12-18D1	Φ26×1212	18W	135 lm/W	2430 lm
	T8-L15-22D1	Φ26×1512	22W	135 lm/W	2970 lm
	T8-L06-09E1	Φ26×602	9W	110 lm/W	990 lm
	T8-L12-18E1	Φ26×1212	18W	110 lm/W	1980 lm
	T8-L15-22E1	Φ26×1512	22W	110 lm/W	2420 lm

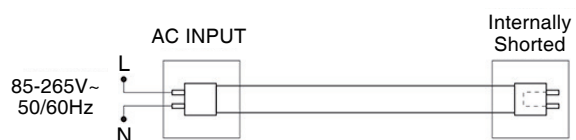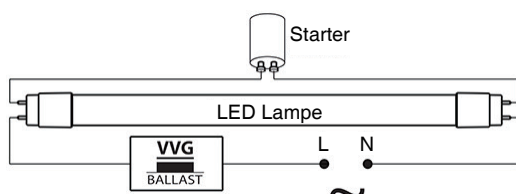

Single Power End






Rada 5.8G + Networking
Communication Module

**intelligent radar sensing
T8 LED Glass Tube**



Rada 5.8G
SENSOR

3-year
warranty

SMD
2835

GLASS

50000
ON / OFF

30000hrs

IP20
IP RATING

4000K
CCT

240V
220V
AC/DC

Ra
≥ 80
CRI


>0.9
PF

220°
BEAM ANGLE


	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux
	T8-L12-18S1	Φ26×1212	18W	160 lm/W	2880 lm
	T8-L15-24S1	Φ26×1512	24W	160 lm/W	3840 lm



T5 LED TUBE

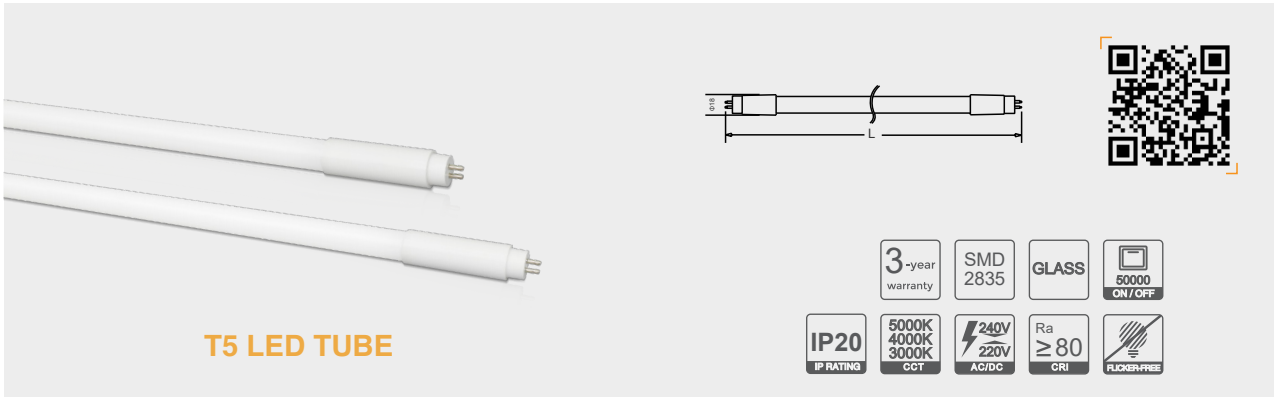

	Product code	Size (mm)	Power	Luminous	PF
A E	T5-L06-09A1	Φ18*549	9W	100 lm	>0.5
A E	T5-L09-12A1	Φ18*849	12W	100 lm	>0.5
A E	T5-L12-18A1	Φ18*1148	18W	100 lm	>0.5
A E	T5-L15-22A1	Φ18*1449	22W	100 lm	>0.5
A C	T5-L06-09C1	Φ18*549	9W	160 lm	>0.9
A C	T5-L09-12C1	Φ18*849	12W	160 lm	>0.9
A C	T5-L12-18C1	Φ18*1148	18W	160 lm	>0.9
A C	T5-L15-22C1	Φ18*1449	22W	160 lm	>0.9

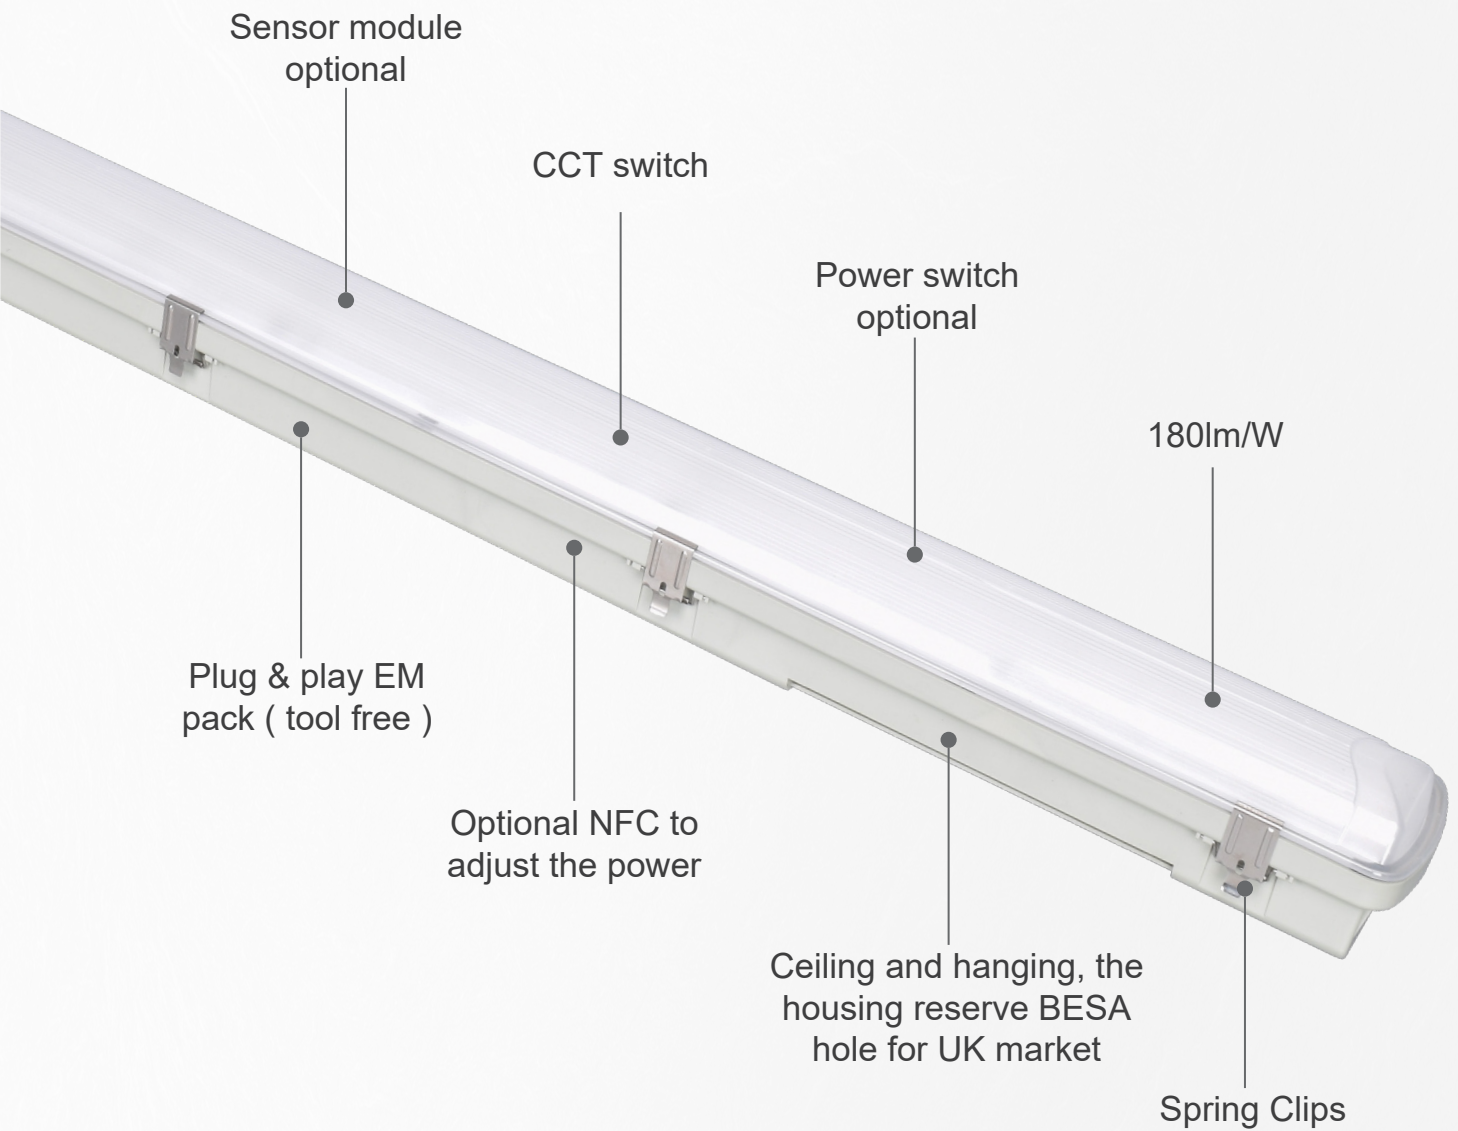


180lm/W LED Waterproof Light




Product Code	Size (mm)	Size(mm) (LF)	Wattage	Light Efficiency	Luminous Flux	Power Supply
TP-12-36F2	L1200*W89*H78	690-990	20W 26W 31W 36W	180lm/W	3600lm 4680lm 5580lm 6480lm	Tridonic on/off
TP-15-55F2	L1500*W89*H78	950-1290	30W 38W 47W 55W	180lm/W	5400lm 6840lm 8460lm 9900lm	Tridonic on/off
TP-12-36FS TP-12-36FS(sensor 1) TP-12-36FS(sensor 2) TP-12-36FS(NFC) TP-12-36FS(Emergency)	L1200*W89*H78	690-990	17W 23W 29W 36W	180lm/W	1360lm 1840lm 5220lm 6480lm	PWM dimmable + 2* 12V DC APS
TP-15-55FS TP-15-55FS(sensor 1) TP-15-55FS(sensor 2) TP-15-55FS(NFC) TP-15-55FS(Emergency)	L1500*W89*H78	950-1290	32W 40W 47W 55W	180lm/W	5760lm 7200lm 8460lm 9900lm	PWM dimmable + 2* 12V DC APS



- NFC: NFC smart fuction optional
- Emergency : 2 watts , 3 Hours
- Sensor 1 : 100% on after detection- 10% on in 3 minuites without detection - off after 3 minuites
- Sensor 2: 100% on after detection- 10% on in 3 minuites without detection - keep 10% on after 3 minuites

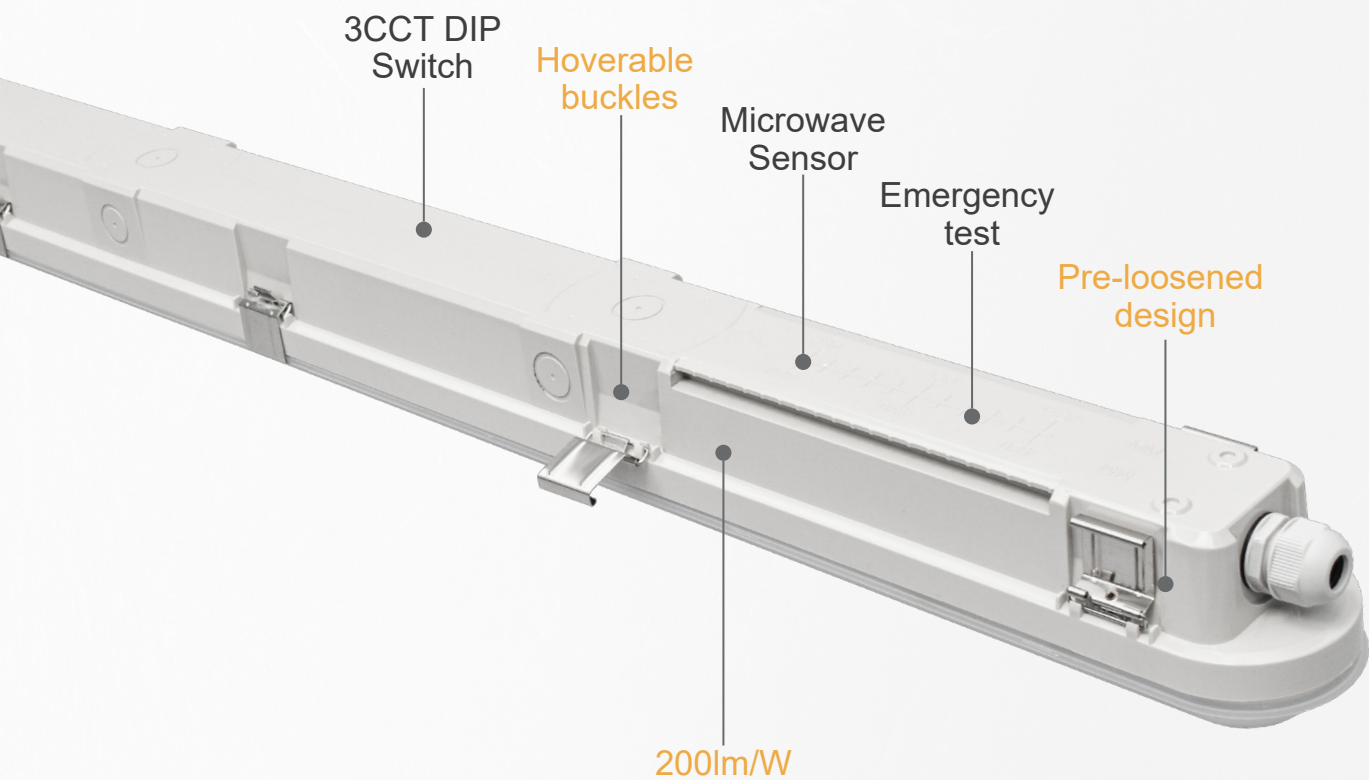


IP66 LED Waterproof Light

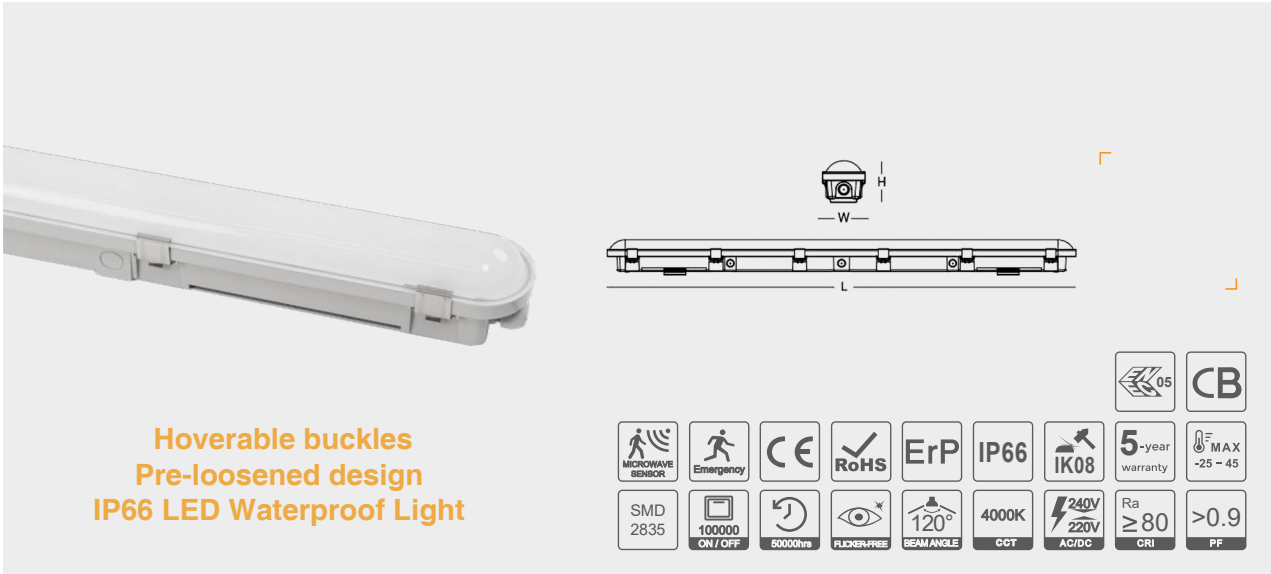

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Linkable
	TP-06-18E2	L580*W80*H81	10-12-15-18W	160lm/W	1600-1920-2400-2880lm	Yes
	TP-12-36E2	L1180*W80*H81	21-26-31-36W	160lm/W	3360-4160-4960-5760lm	Yes
	TP-15-50E2	L1480*W80*H81	28-36-42-50W	160lm/W	4480-5760-6720-8000lm	Yes
	TP-18-70E2	L1780*W80*H81	40-50-60-70W	160lm/W	6400-8000-9600-11200lm	Yes
	TP-06-18G2	L600*W85*H80	18W	200lm/W	3600lm	Yes
	TP-12-36G2	L1200*W85*H80	36W	200lm/W	7200lm	Yes
	TP-15-50G2	L1500*W85*H80	50W	200lm/W	10000lm	Yes

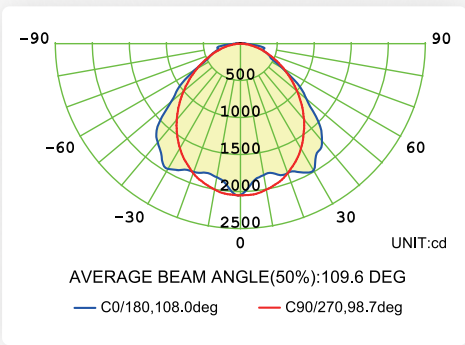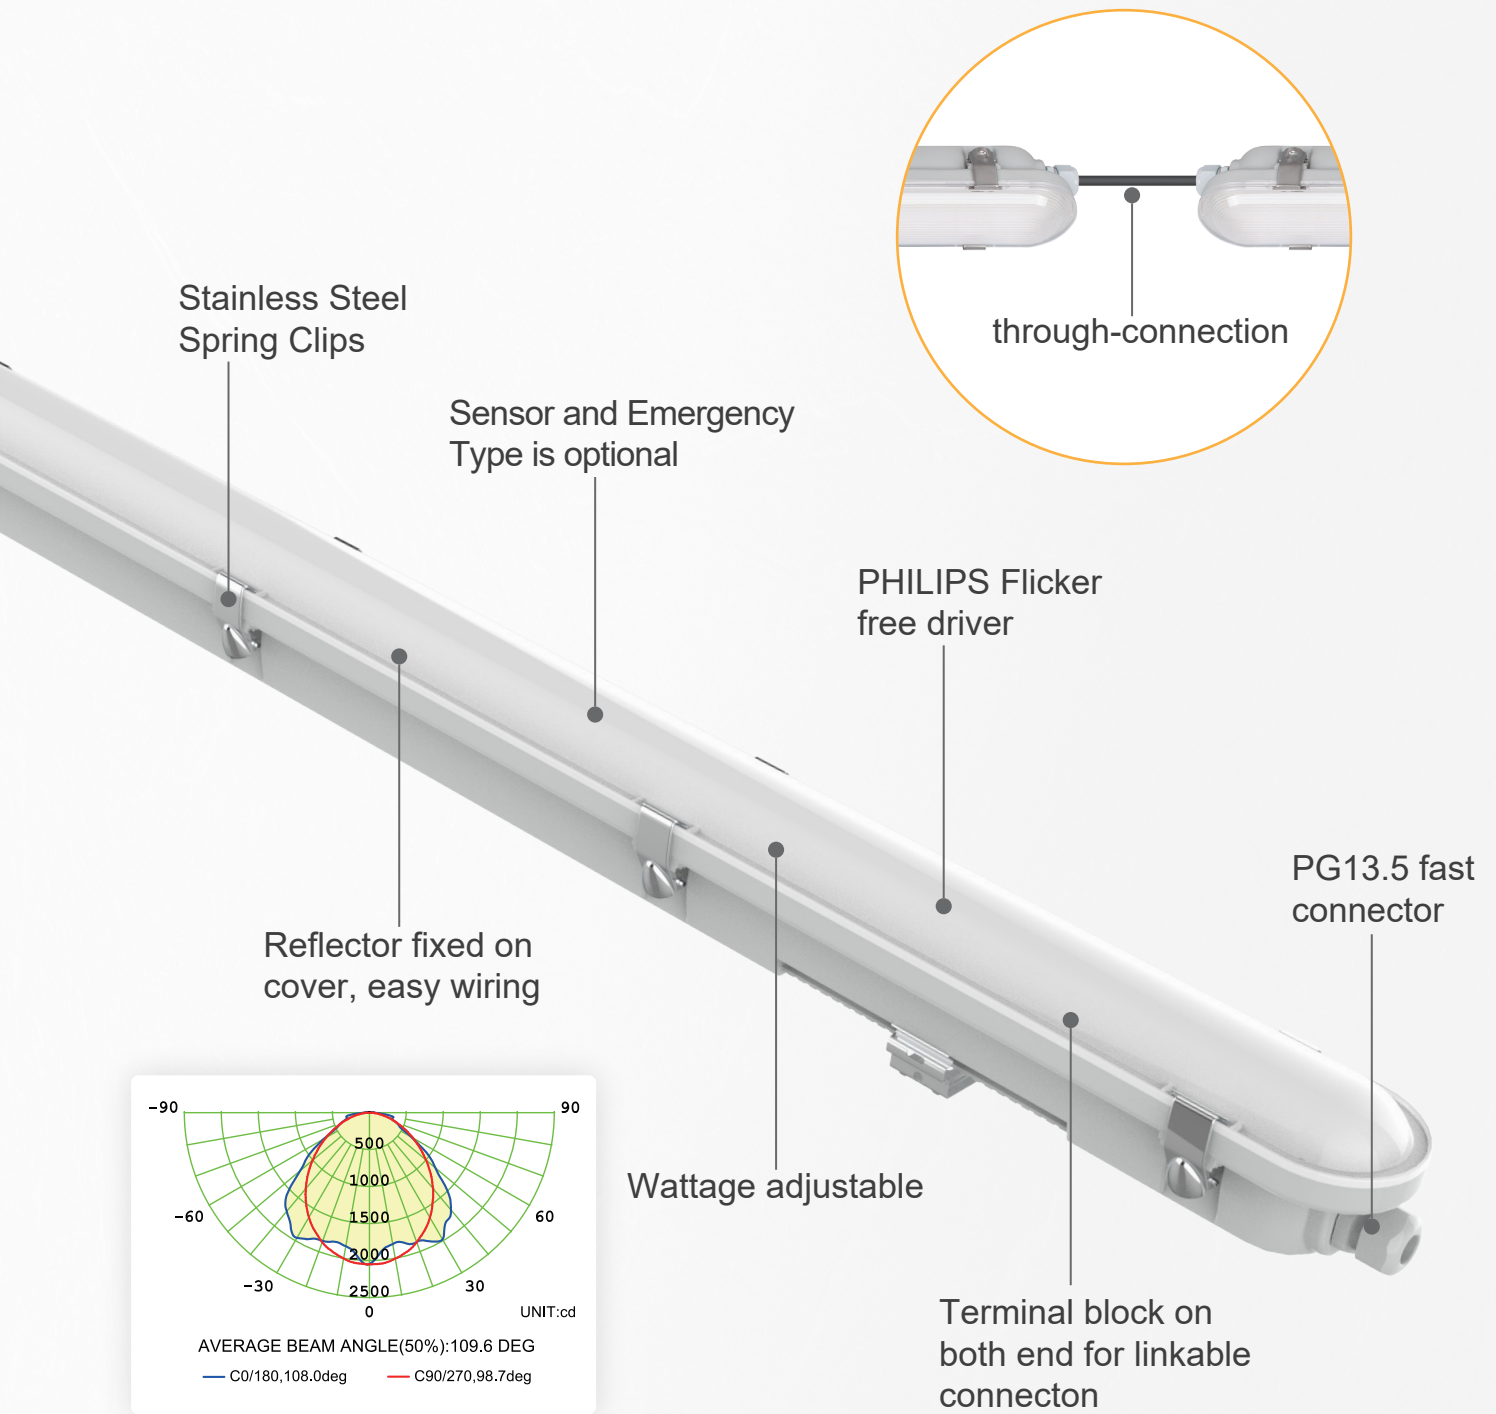


Anti-glare IP66 IK08 Tri-proof light

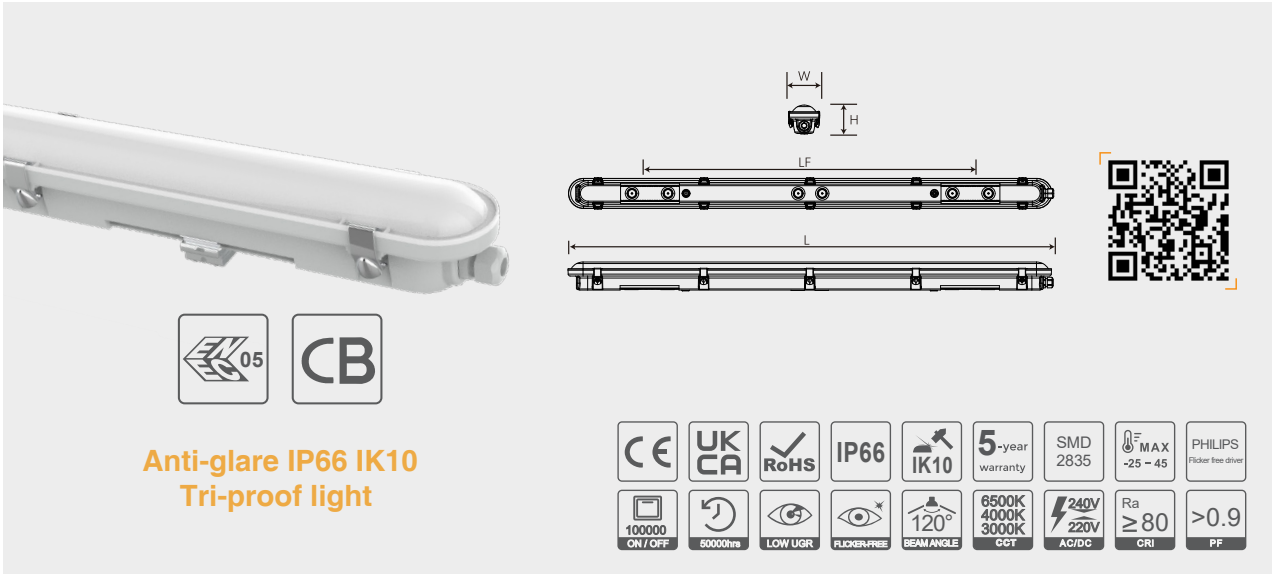

Anti-glare IP66 IK10
Tri-proof light


	Product Code	Size (mm)	Size(mm) (LF)	Wattage	Light Efficiency	Luminous Flux(Typ.)	Linkable
	TP-06-18B1	L607*W75*H70	290	18W	160lm/W	2880lm	No
	TP-12-36B1	L1207*W75*H70	800	20/25/30/36W	160lm/W	5760lm	No
	TP-15-55B1	L1507*W75*H70	1060	29/36/44/55W	160lm/W	8800lm	No
	TP-06-18B2	L607*W75*H70	290	18W	160lm/W	2700lm	Yes
	TP-12-36B2	L1207*W75*H70	800	20/25/30/36W	160lm/W	5760lm	Yes
	TP-15-55B2	L1507*W75*H70	1060	29/36/44/55W	160lm/W	8800lm	Yes
	TP-06-18B2-3CCT	L607*W75*H70	290	18W	160lm/W	2700lm	Yes
	TP-12-36B2-3CCT	L1207*W75*H70	800	20/25/30/36W	160lm/W	5760lm	Yes
	TP-15-55B2-3CCT	L1507*W75*H70	1060	29/36/44/55W	160lm/W	8800lm	Yes

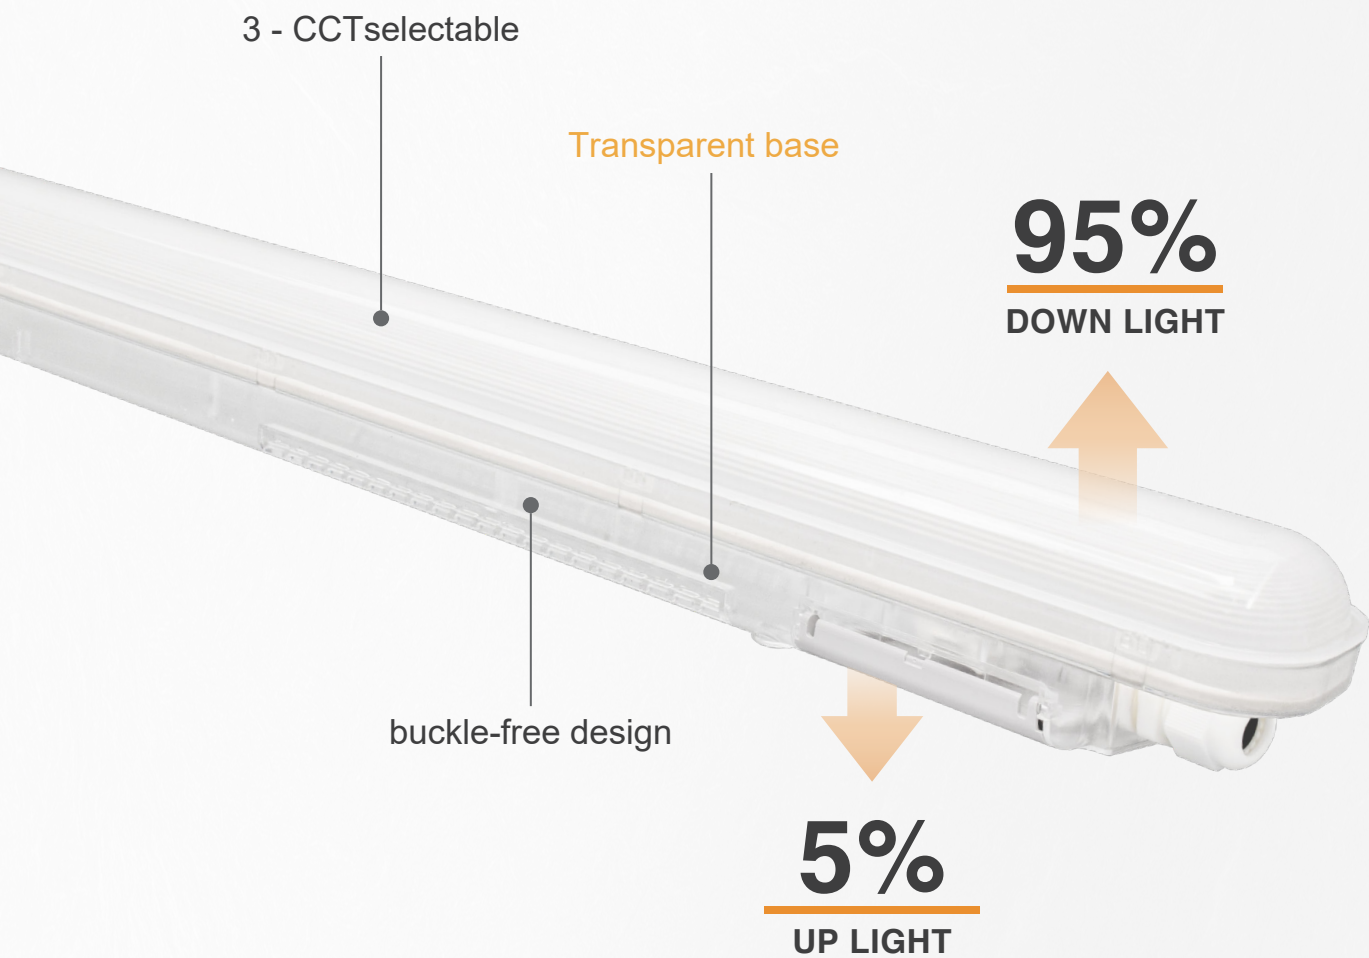


Transparent base LED Waterproof Light




	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Linkable
	TP-06-18G3	L600*W70*H66	18W	160lm/W	2880lm	Yes
	TP-12-30G3	L1200*W70*H66	30W	160lm/W	4800lm	Yes
	TP-15-40G3	L1500*W80*H66	40W	160lm/W	6400lm	Yes

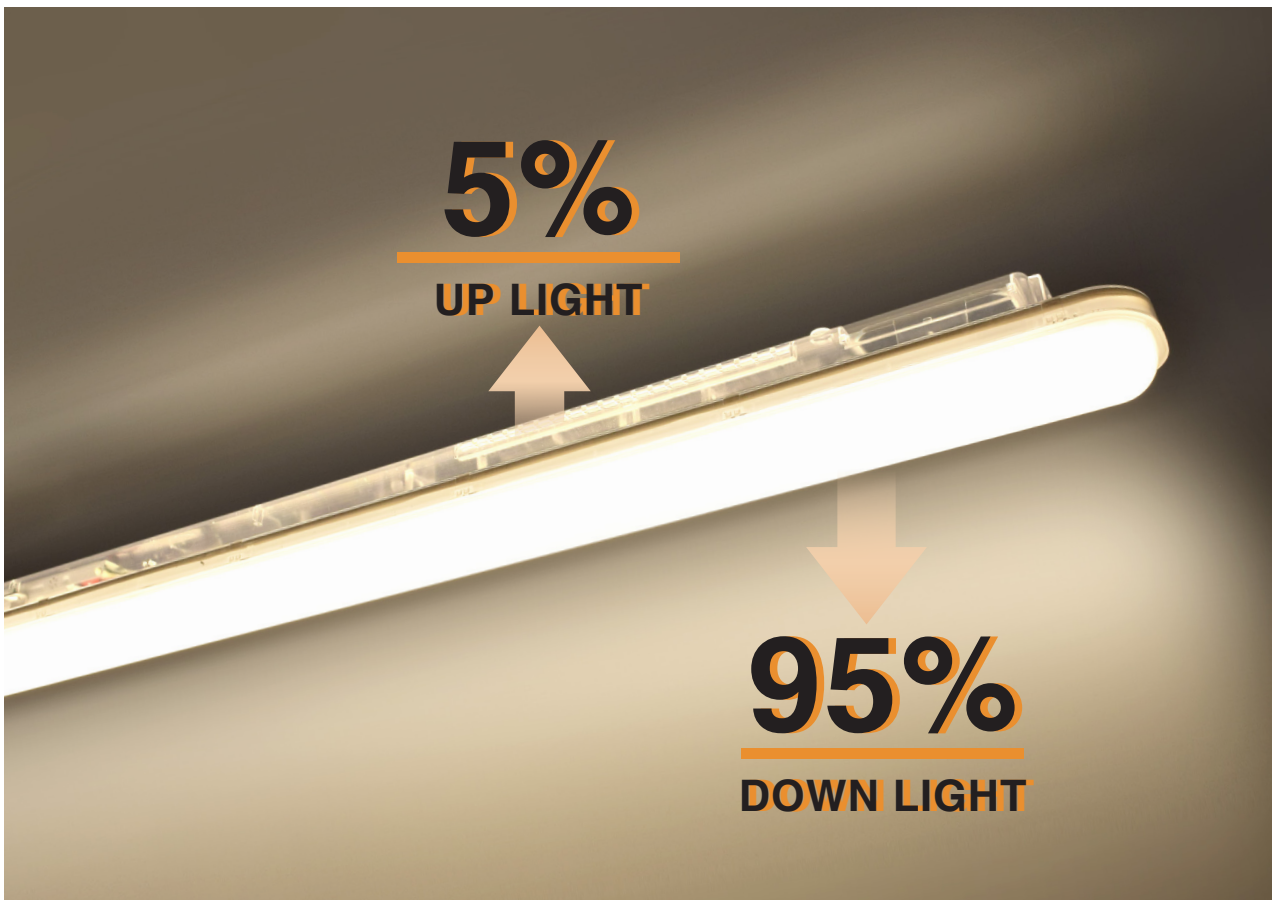

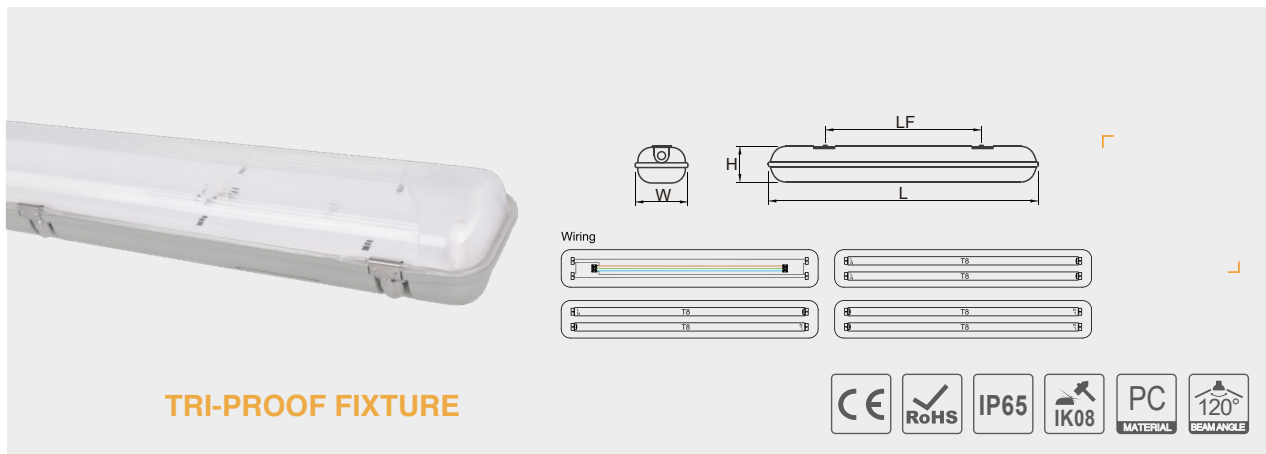


TRI-PROOF FIXTURE

Product Code	Size (mm) (L*W*H*LF)	Number of light sources	Lamp holder	Linkable	Material			
					Base	Cover	Reflector	Clips
TP-118K	650*82*86*350	1	G13	Yes	PC	PC	Power coated steel	Stainless steel
TP-136K	1260*82*86*900	1	G13	Yes	PC	PC	Power coated steel	Stainless steel
TP-158K	1560*82*86*1200	1	G13	Yes	PC	PC	Power coated steel	Stainless steel
TP-218K	650*127*86*350	2	G13	Yes	PC	PC	Power coated steel	Stainless steel
TP-236K	1260*127*86*900	2	G13	Yes	PC	PC	Power coated steel	Stainless steel
TP-258K	1560*127*86*1200	2	G13	Yes	PC	PC	Power coated steel	Stainless steel

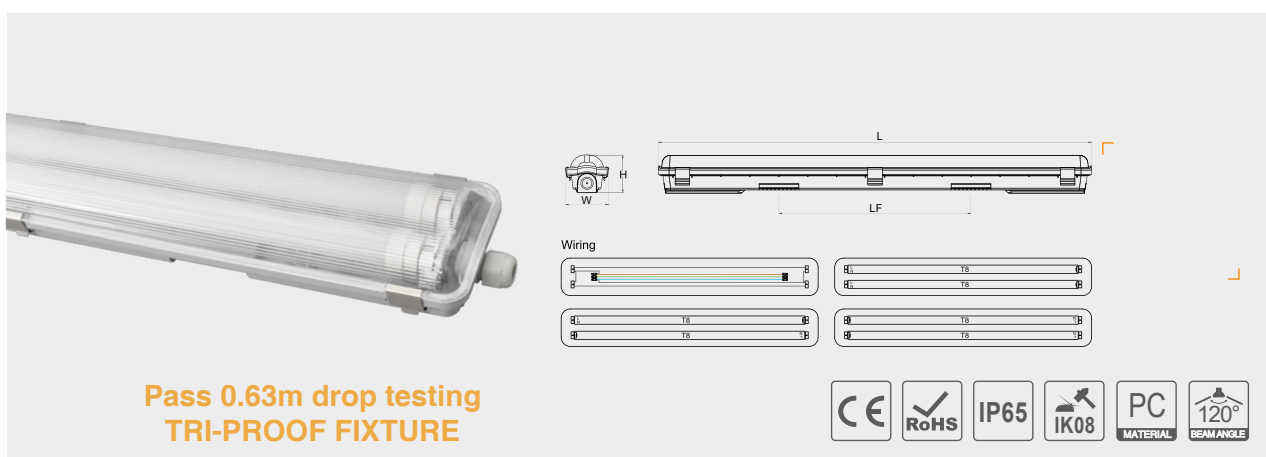


Pass 0.63m drop testing TRI-PROOF FIXTURE

Product Code	Size (mm) (L*W*H*LF)	Number of light sources	Lamp holder	Linkable	Material			
					Base	Cover	Reflector	Clips
TP-118XL	655*65*57*290	1	G13	Yes	ABS	PC	Power coated steel	Stainless steel
TP-136XL	1265*65*57*900	1	G13	Yes	ABS	PC	Power coated steel	Stainless steel
TP-158XL	1565*65*57*1200	1	G13	Yes	ABS	PC	Power coated steel	Stainless steel
TP-218XL	655*103*57*290	2	G13	Yes	ABS	PC	Power coated steel	Stainless steel
TP-236XL	1265*103*57*900	2	G13	Yes	ABS	PC	Power coated steel	Stainless steel
TP-258XL	1565*103*57*1200	2	G13	Yes	ABS	PC	Power coated steel	Stainless steel

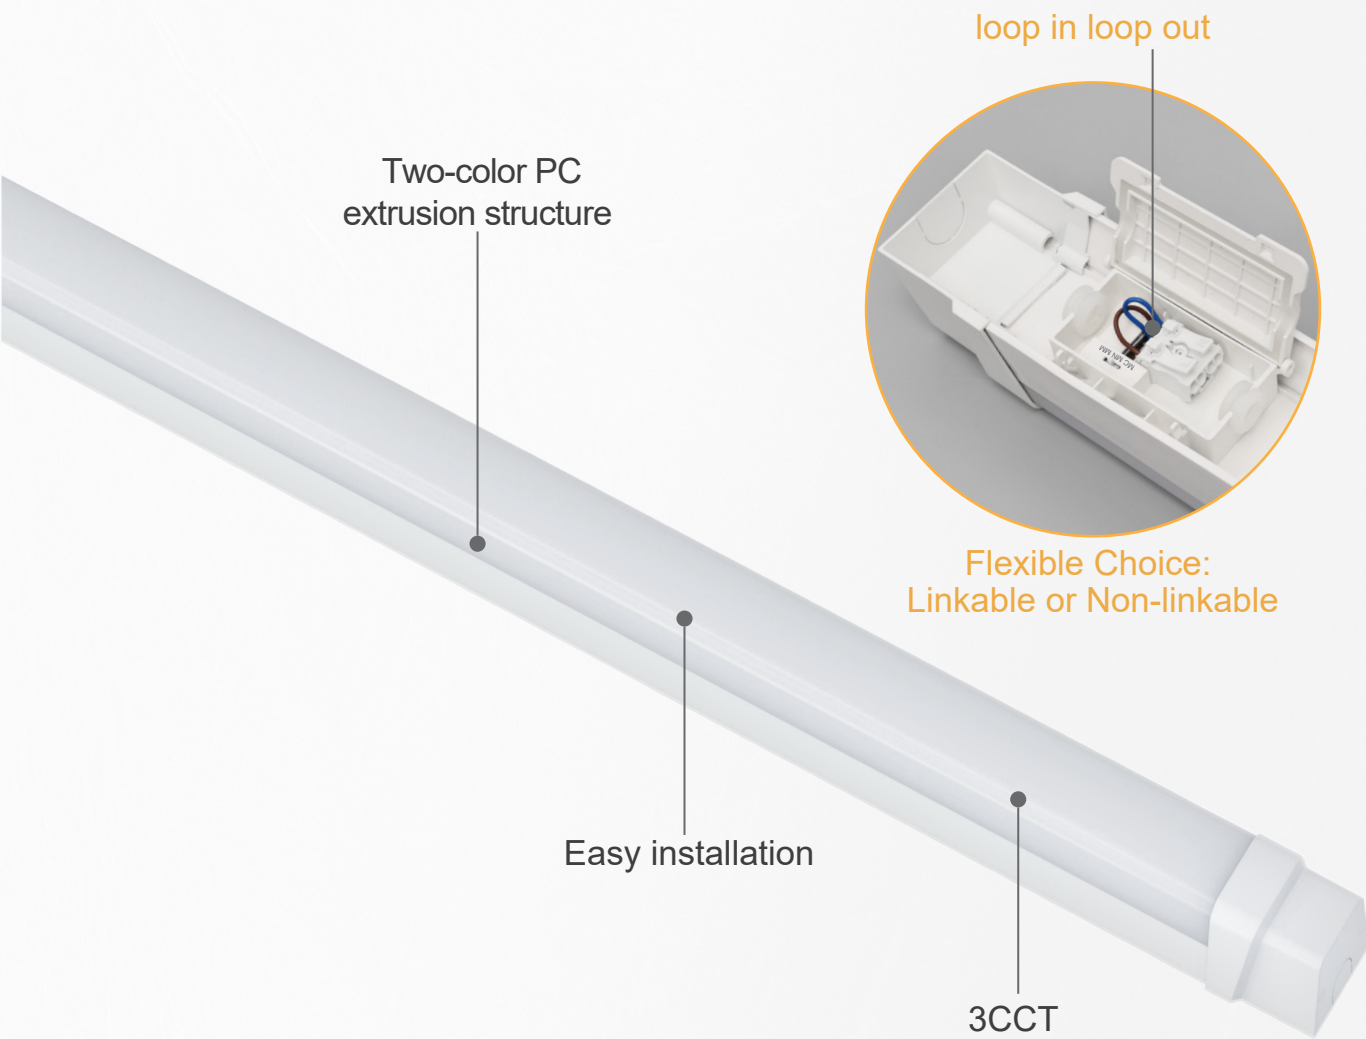

IP65 Waterproof Light

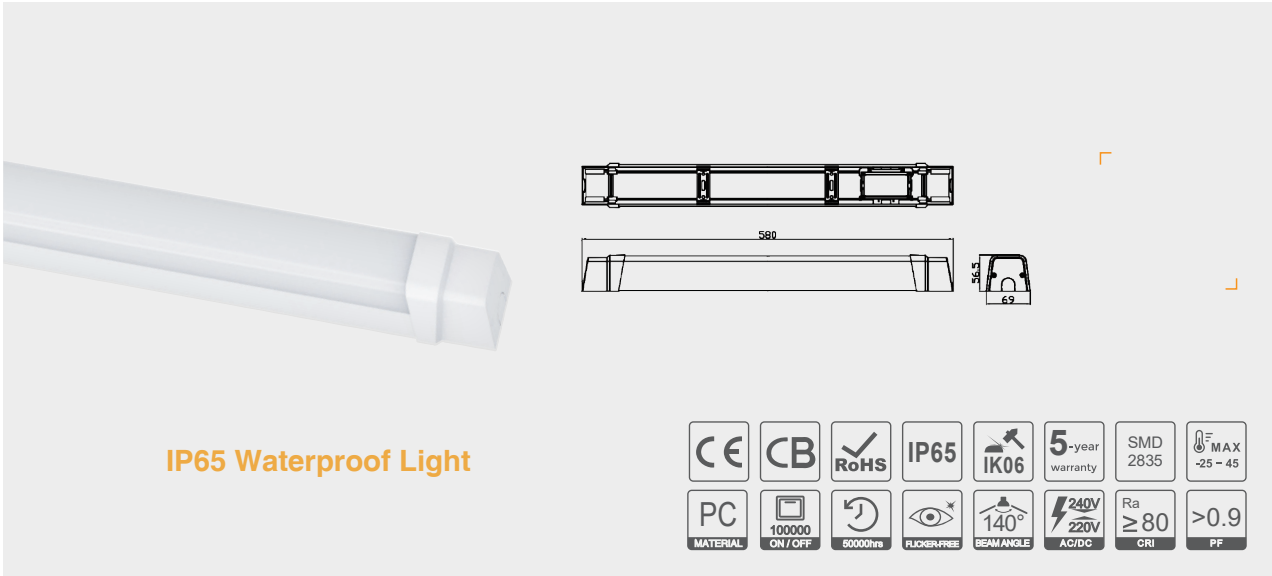

IP65 Waterproof Light


Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	3CCT	Linkable
TP-06-18C4	L600*W69*H56.5	18W	140lm/W	2520lm	3000-4000-6500K	optional
TP-12-36C4	L1160*W69*H56.5	36W	140lm/W	5040lm	3000-4000-6500K	optional
TP-15-50C4	L1460*W69*H56.5	50W	140lm/W	7000lm	3000-4000-6500K	optional




IP65 LED Waterproof Light




120/160lm/W IP65 LED
Waterproof Light

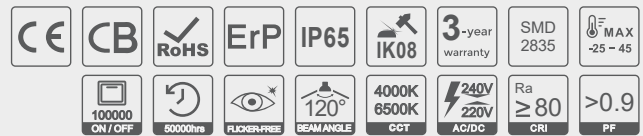

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Linkable
	TP-06-18-C2	L600*W66.2*H59.4	18W	120lm/W	2160lm	Yes/No
	TP-12-36-C2	L1200*W66.2*H59.4	36W	120lm/W	4320lm	Yes/No
	TP-15-48-C2	L1500*W66.2*H59.4	48W	120lm/W	5760lm	Yes/No
	TP-06-18-C3	L600*W66.2*H59.4	18W	160lm/W	2880lm	Yes/No
	TP-12-36-C3	L1200*W66.2*H59.4	36W	160lm/W	5760lm	Yes/No
	TP-15-48-C3	L1500*W66.2*H59.4	48W	160lm/W	7680lm	Yes/No

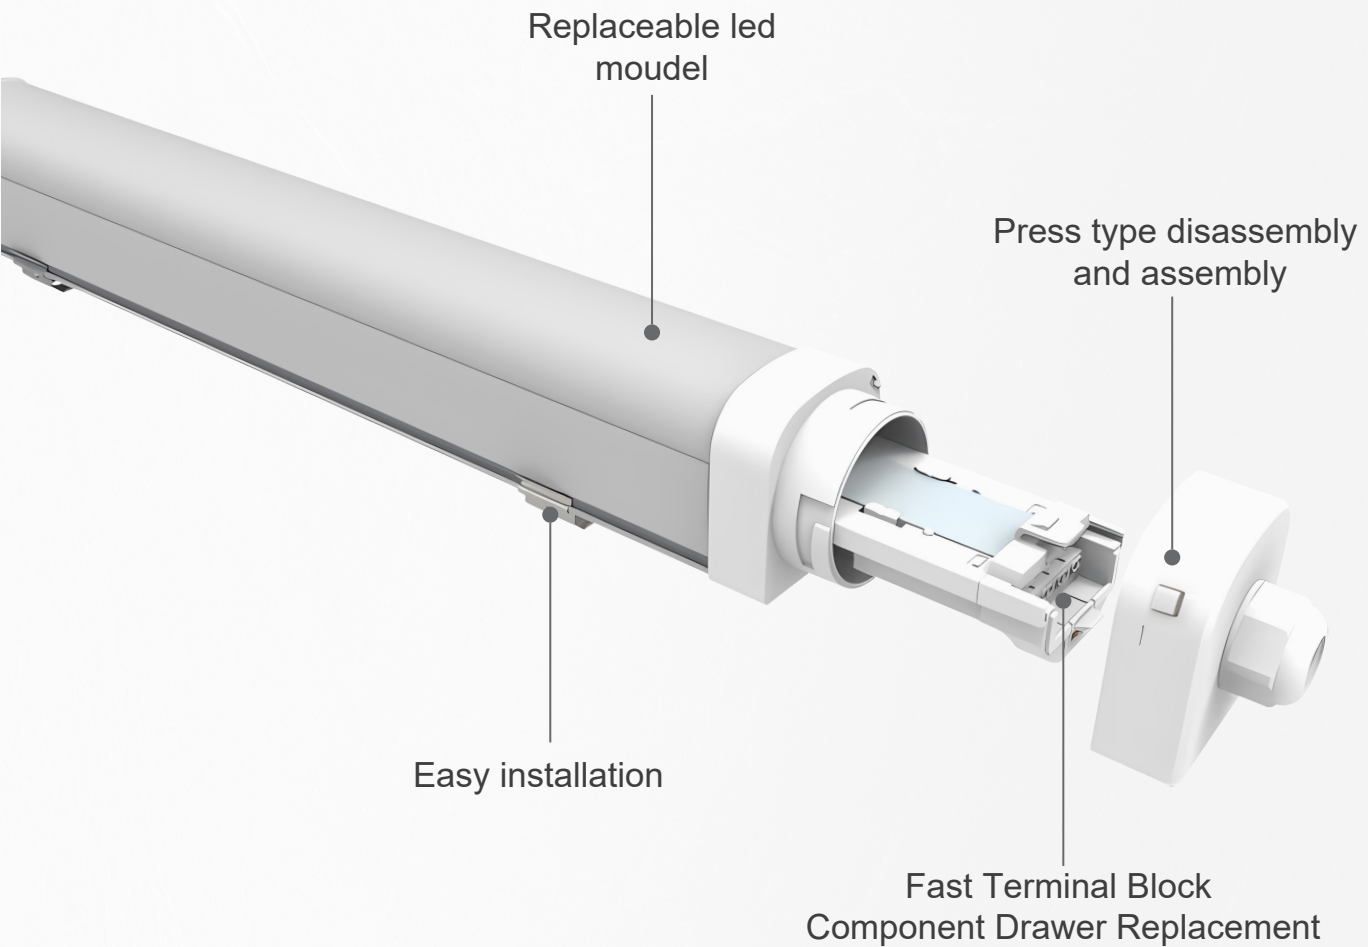


160lm/W IP65 LED Waterproof Light

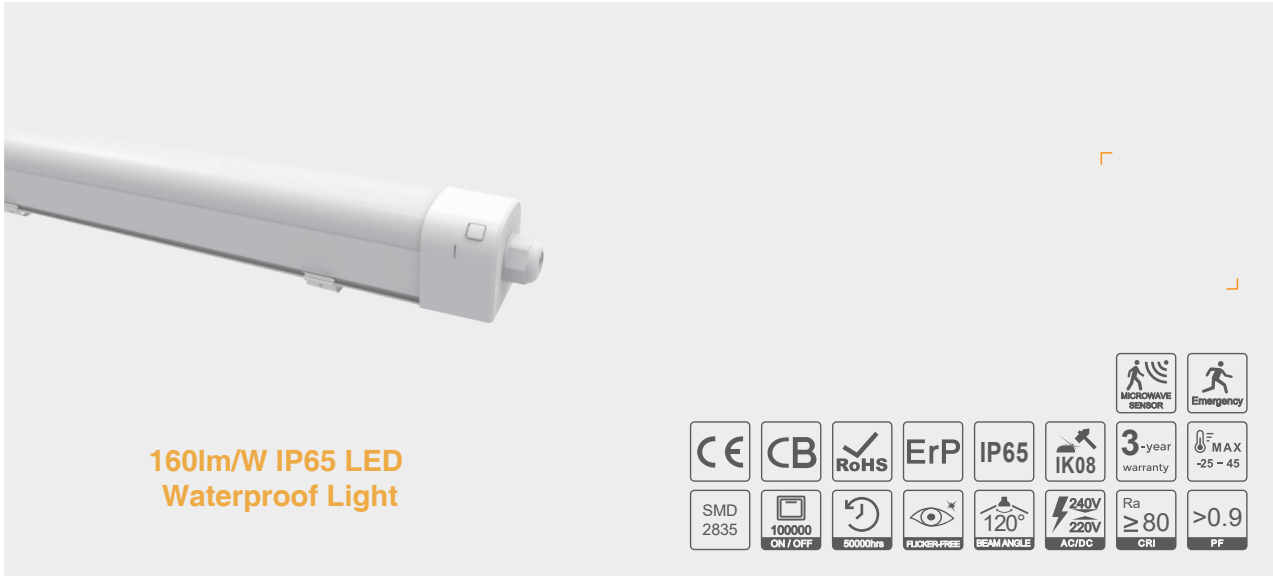


**160lm/W IP65 LED
Waterproof Light**





	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	CCT	Linkable
	TP-12-18A4	L1240*W70*H73	18W	160lm/W	2880lm	4000/6500K	Yes/No
	TP-12-34A4	L1240*W70*H73	34W	160lm/W	5440lm	4000/6500K	Yes/No
	TP-15-27A4	L1540*W70*H73	27W	160lm/W	4320lm	4000/6500K	Yes/No
	TP-15-55A4	L1540*W70*H73	55W	160lm/W	8800lm	4000/6500K	Yes/No

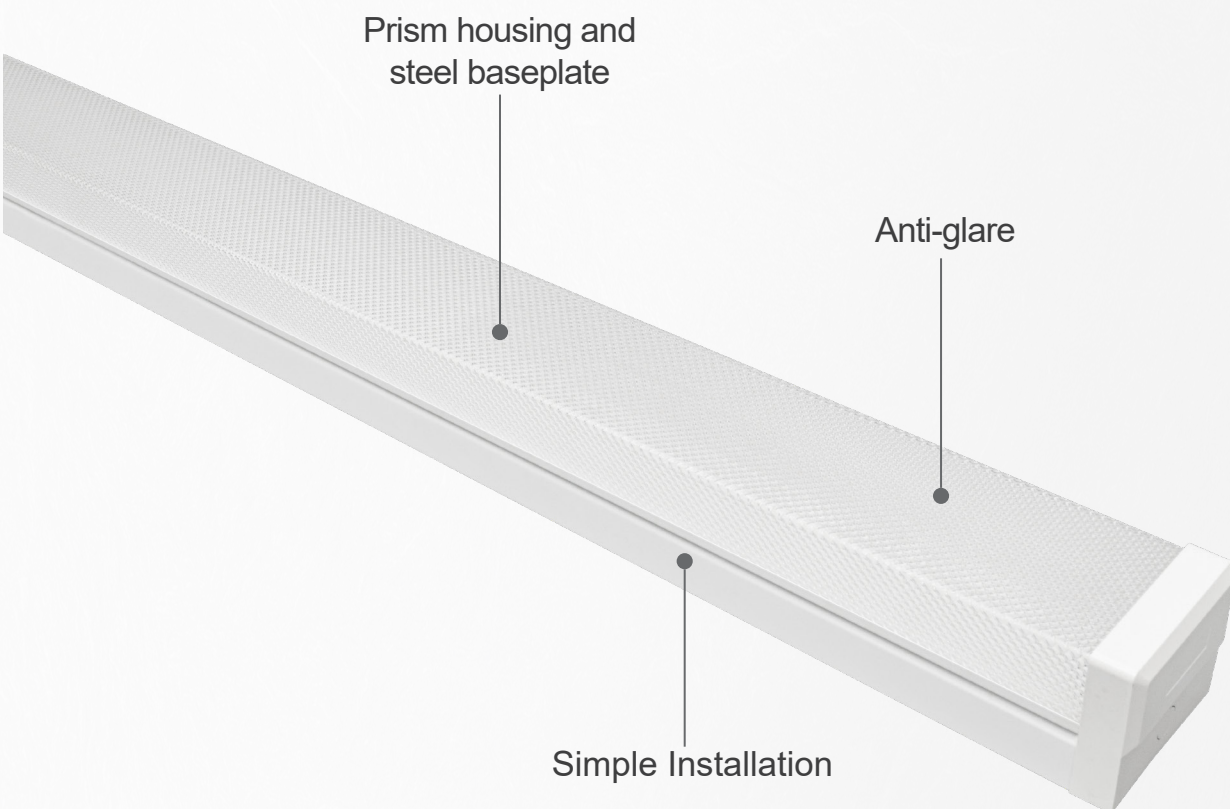

T8 LED Batten fixture

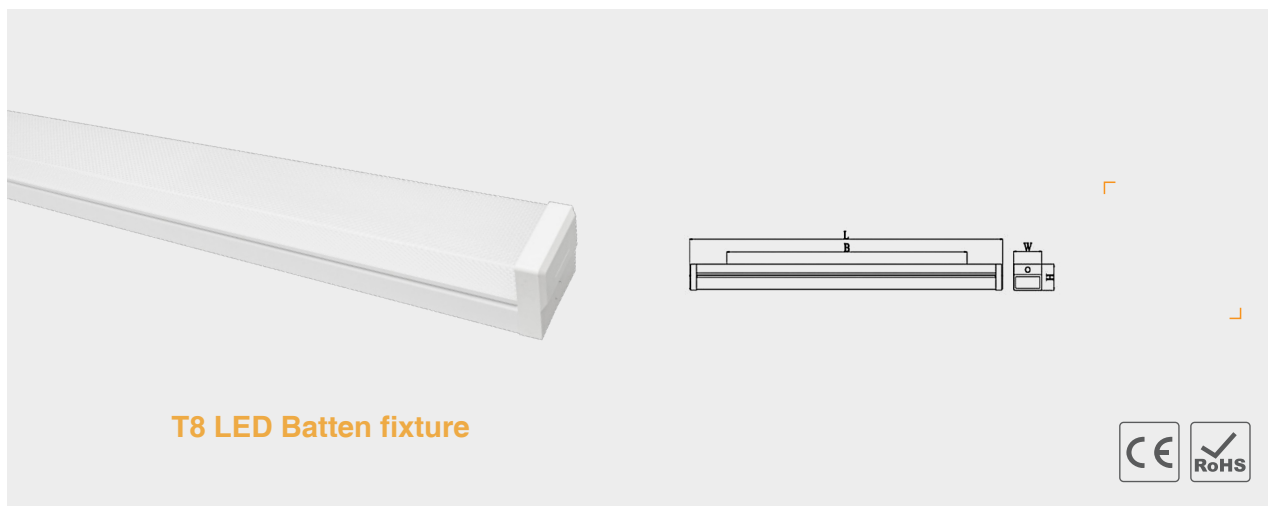


Product Code	Size (mm)	Mating Tube	Number of light sources	Lamp holder	Material
BF-218	L655*W112*H99	T8 LED Tube 0.6m	2	G13	Steel+PC
BF-236	L1255*W112*H99	T8 LED Tube 1.2m	2	G13	Steel+PC
BF-258	L1555*W112*H99	T8 LED Tube 1.5m	2	G13	Steel+PC

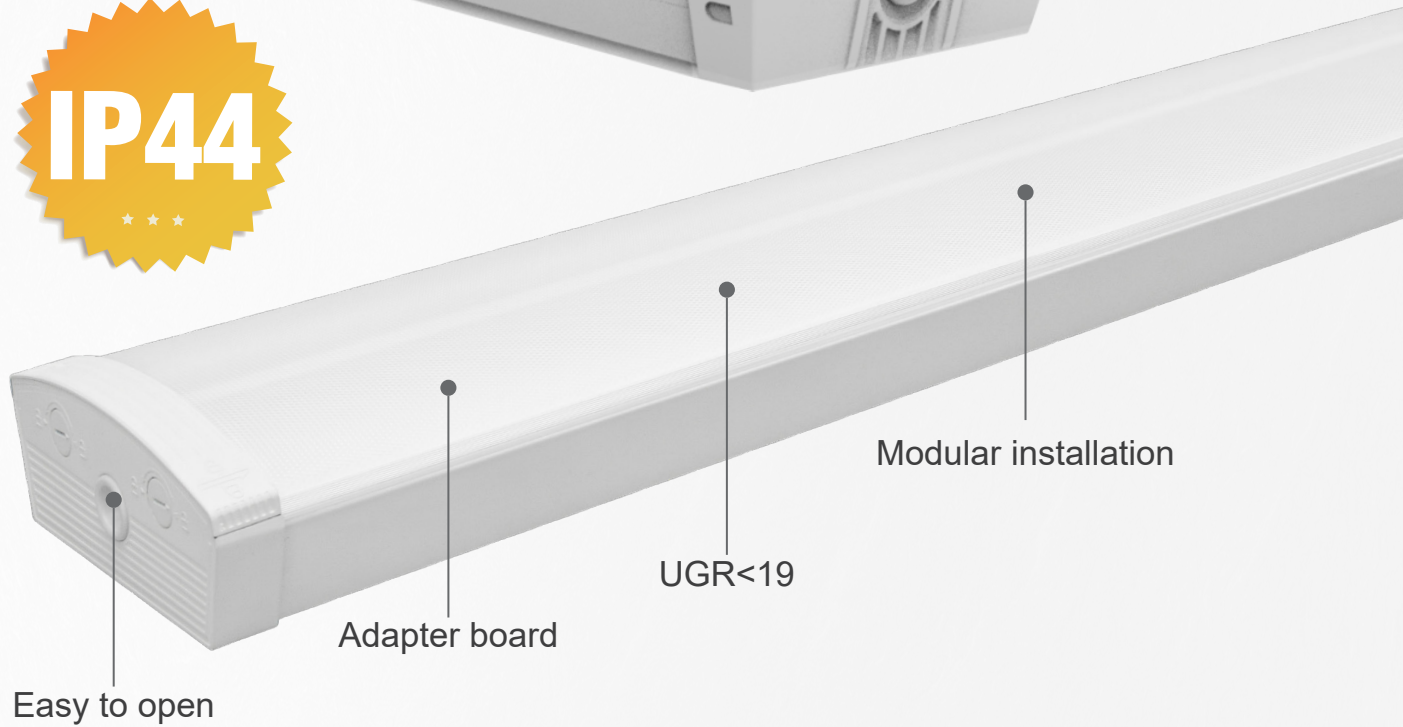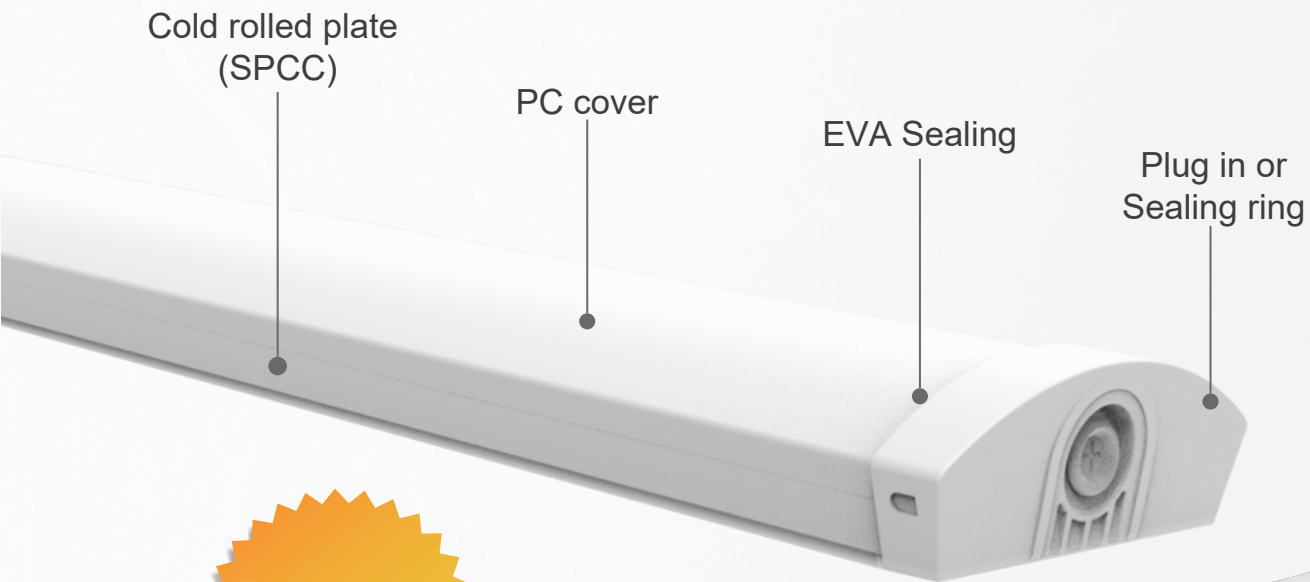


IP44 LED Batten Light



Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	CCT
BF-12-36C1-3CCT	1160*160*61	21W	160lm/W	3360lm	3000K
		26W		4160lm	3500K
		32W		5120lm	4000K
		36W		5760lm	
BF-15-42C1-3CCT	1440*160*61	25W	160lm/W	4000lm	3000K
		30W		4800lm	3500K
		36W		5760lm	4000K
		42W		6720lm	

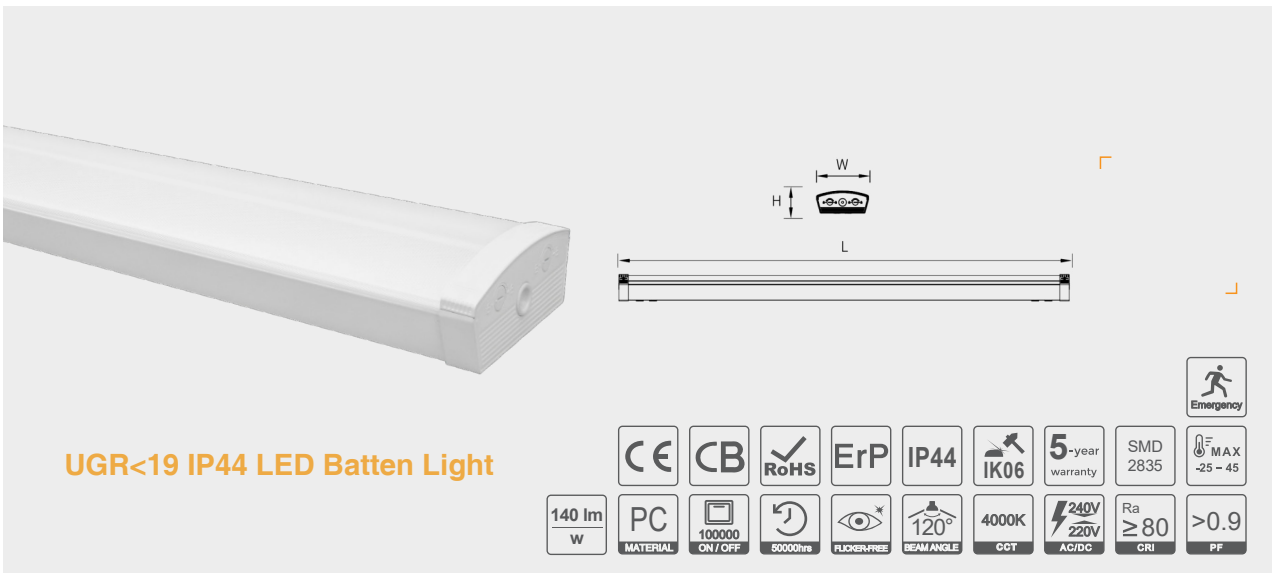



Product Code	Size (mm)	Wattage	Luminous Flux	UGR
BF-12-36U1	L1200*W160*H70	22-29-36W	3080-4060-5040lm	<19
BF-15-58U1	L1500*W160*H70	38-50-58W	5320-7000-8120lm	<19

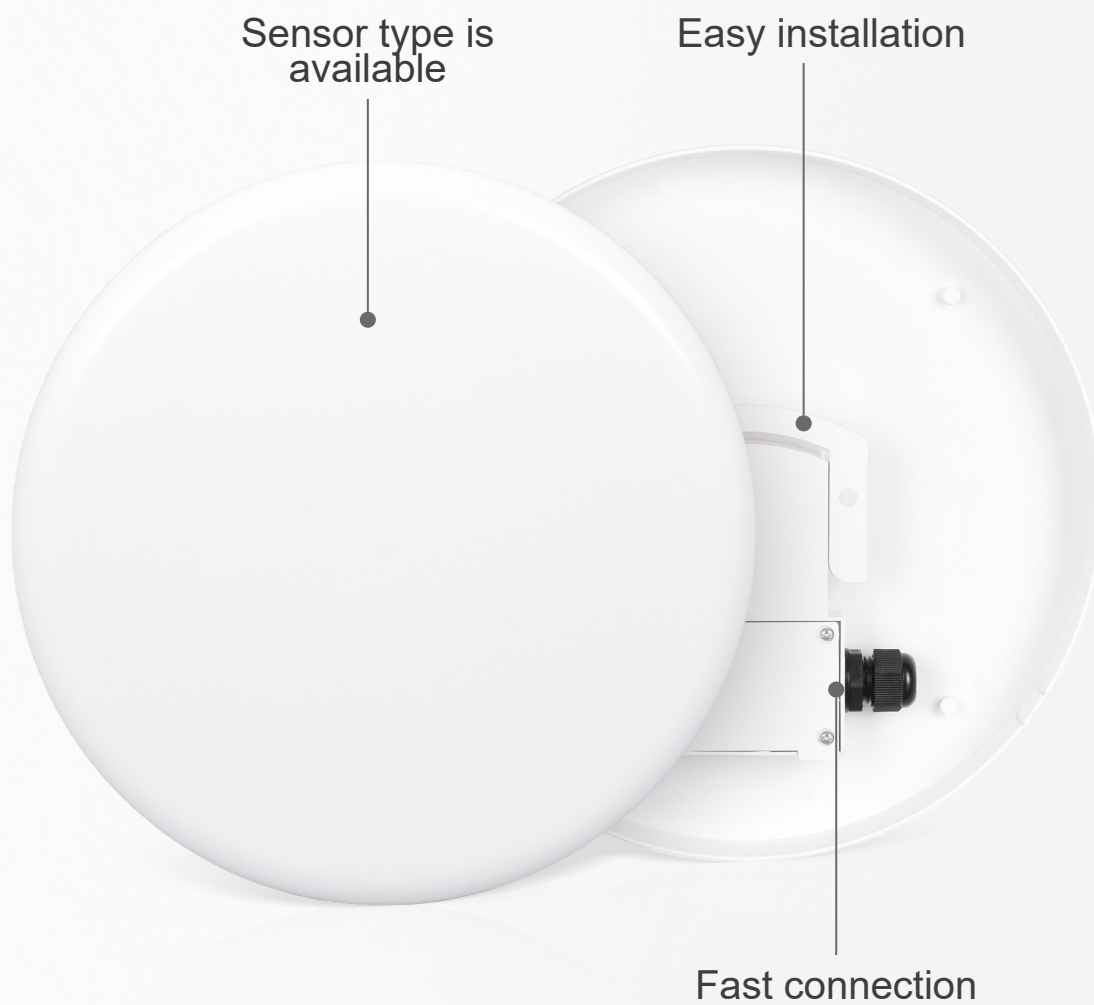

IP65 IK10 LED CEILING LIGHT




**IP65 IK10
LED CEILING LIGHT**

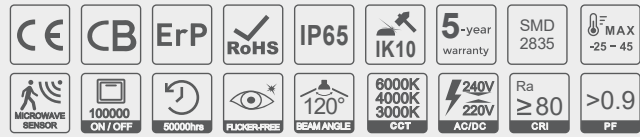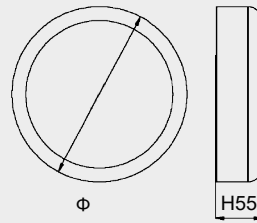


	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	IK/IP RATING
	M-200-10A1	Φ200x55	10W	120Lm/W	1200lm	IK10/IP65
	M-200-19A1	Φ200x55	19W	120Lm/W	2280lm	IK10/IP65
	M-260-26A1	Φ260x55	26W	120Lm/W	3120lm	IK10/IP65
	M-350-35A1	Φ350x55	35W	120Lm/W	4200lm	IK10/IP65



**IP65 IK10
LED CEILING LIGHT**

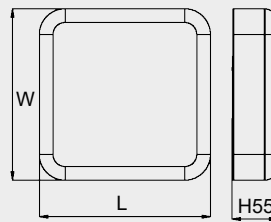



	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	IK/IP RATING
	M-200-10A2	200x200x55	10W	120Lm/W	1200lm	IK10/IP65
	M-200-19A2	200x200x55	19W	120Lm/W	2280lm	IK10/IP65
	M-260-26A2	260x260x55	26W	120Lm/W	3120lm	IK10/IP65
	M-350-35A2	350x350x55	35W	120Lm/W	4200lm	IK10/IP65

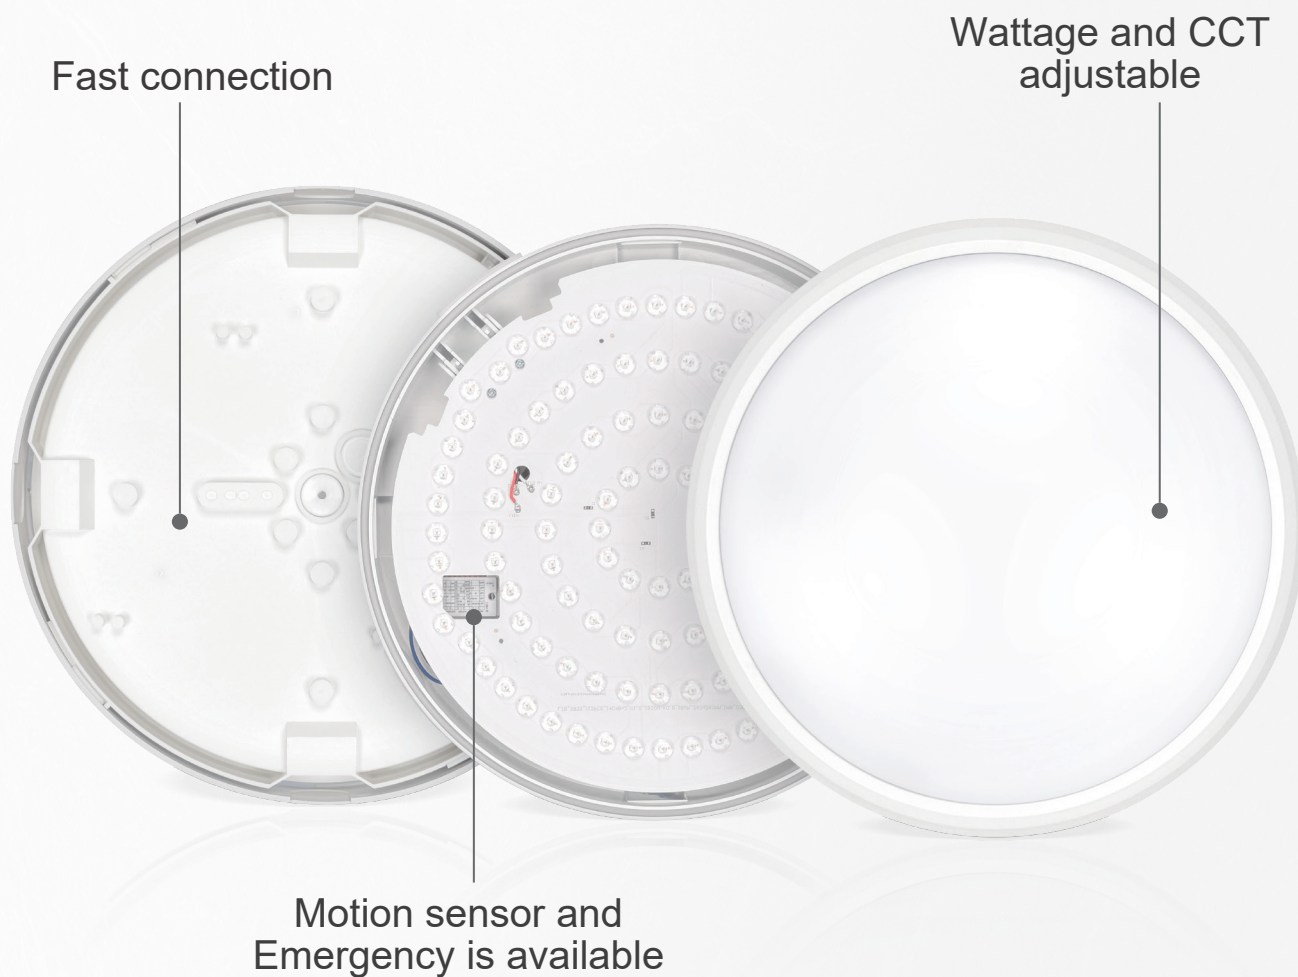

IP65 IK10 LED CEILING LIGHT




**IP65 IK10
LED CEILING LIGHT**

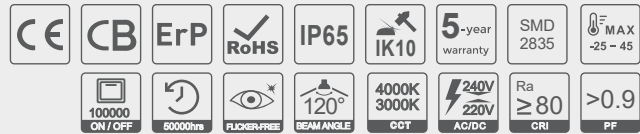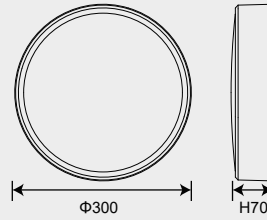

Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Type
M-300-18DW-2CCT	Φ300-H70	12/15/18W	120 lm/W	1440lm/1800lm/2160lm	On-Off
M-300-25DW-2CCT	Φ300-H70	20/25W	120 lm/W	2400lm/3000lm	On-Off
M-300-18SW-2CCT	Φ300-H70	12/15/18W	120 lm/W	1440lm/1800lm/2160lm	Sensor
M-300-25SW-2CCT	Φ300-H70	20/25W	120 lm/W	2400lm/3000lm	Sensor
M-300-18EW-2CCT	Φ300-H70	12/15/18W	120 lm/W	1440lm/1800lm/2160lm	Emergency
M-300-25EW-2CCT	Φ300-H70	20/25W	120 lm/W	2400lm/3000lm	Emergency



**IP65 IK10
LED CEILING LIGHT**

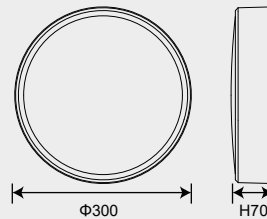

Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Type
M-300-18A1	Φ300-H70	18W	120 lm/W	2160lm	On-Off
M-300-25A1	Φ300-H70	25W	120 lm/W	3000lm	On-Off
M-300-18S1	Φ300-H70	18W	120 lm/W	2160lm	Sensor
M-300-25S1	Φ300-H70	25W	120 lm/W	3000lm	Sensor
M-300-18E1	Φ300-H70	18W	120 lm/W	2160lm	Emergency
M-300-25E1	Φ300-H70	25W	120 lm/W	3000lm	Emergency



LED CEILING LIGHT




Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	3CCT
AG F C6300-BM	Φ300mm*H69.5	12W	105lm/w	1150lm/1260lm/1200lm	3000K/4000K/5700K
		18W	100lm/w	1620lm/1800lm/1710lm	
AG F C6400-BM	Φ400mm*H69.5	20W	105lm/w	1900lm/2100lm/2000lm	3000K/4000K/5700K
		30W	100lm/w	2700lm/3000lm/2850lm	
AG E C6500-BM	Φ500mm*H69.5	28W	115lm/w	3000lm/3220lm/3080lm	3000K/4000K/5700K
		40W	110lm/w	4300lm/4500lm/4400lm	
AG E C6600-BM	Φ600mm*H69.5	42W	115lm/w	4410lm/4830lm/4620lm	3000K/4000K/5700K
		60W	110lm/w	6000lm/6600lm/6300lm	
AG E C6800-BM	Φ800mm*H69.5	56W	120lm/w	6050lm/6600lm/6160lm	3000K/4000K/5700K
		80W	115lm/w	8400lm/9200lm/8800lm	



Optional





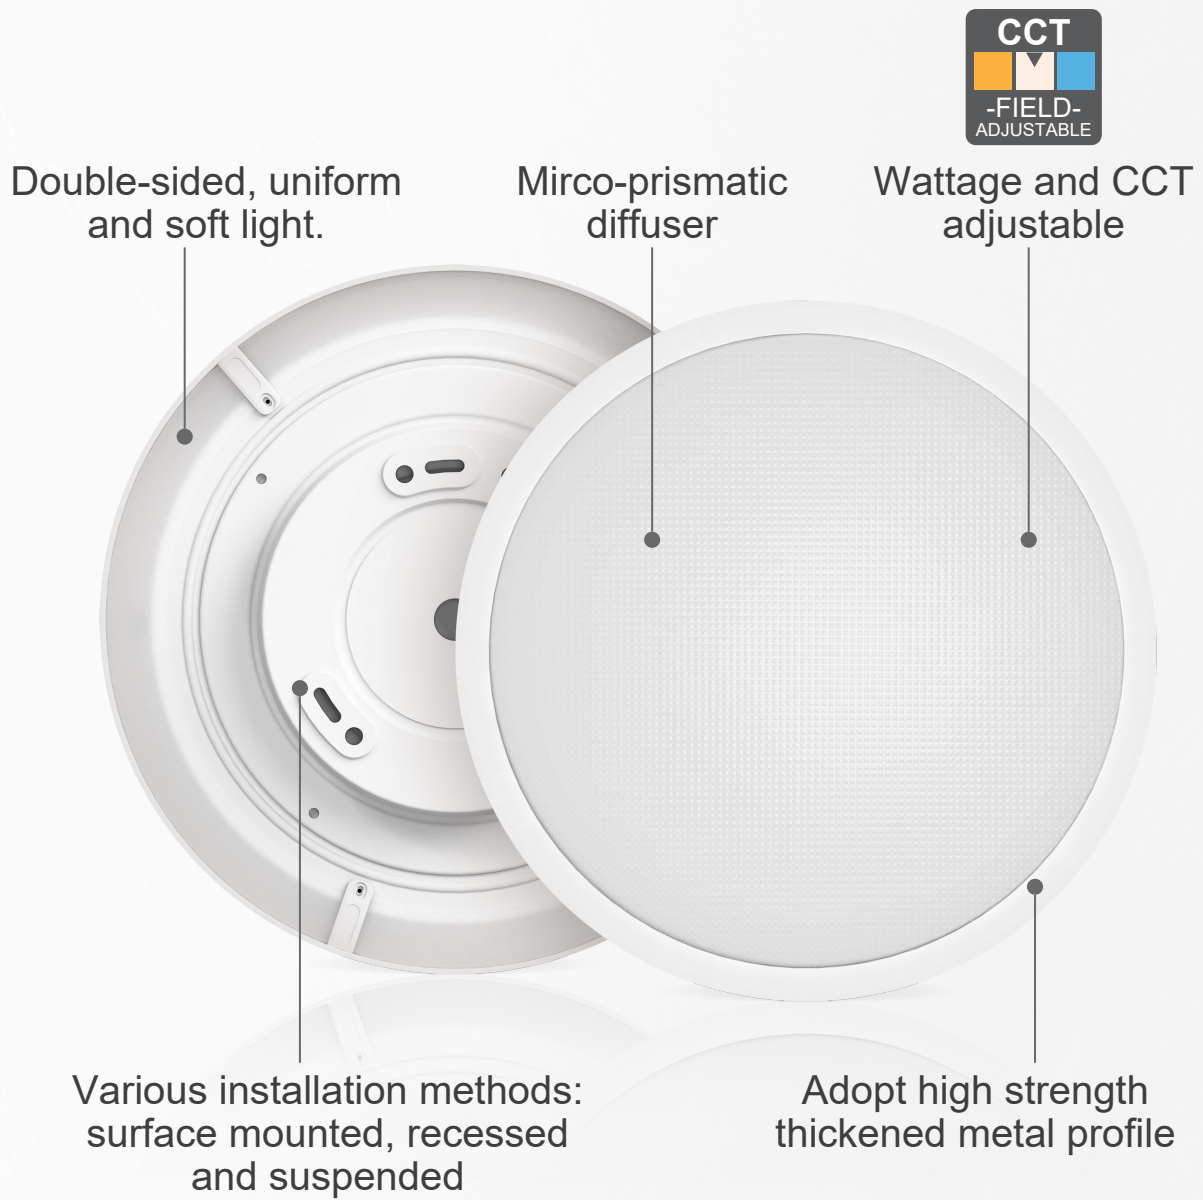

LED CEILING LIGHT




Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	3CCT
AG F C6400-AM	Φ400*86	30W	100lm/W	3150lm/3300lm/3240lm	3000K/4000K/5700K
		40W	100lm/W	4000lm/4200lm/4120lm	
AG F C6600-AM	Φ600*86	40W	100lm/W	4200lm/4600lm/4400lm	3000K/4000K/5700K
		60W	100lm/W	6000lm/6300lm/6180lm	
AG F C6800-AM	Φ800*86	60W	100lm/W	6300lm/6600lm/6480lm	3000K/4000K/5700K
		80W	100lm/W	8000lm/8400lm/8240lm	

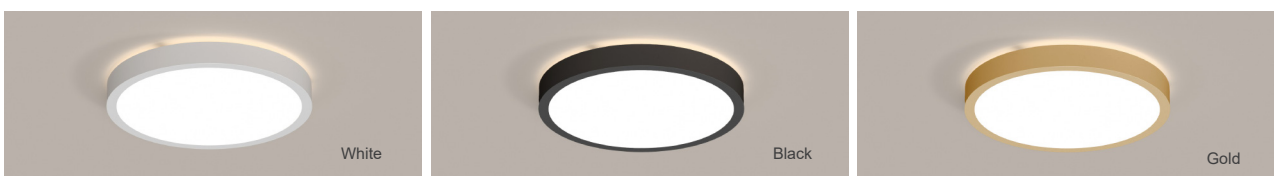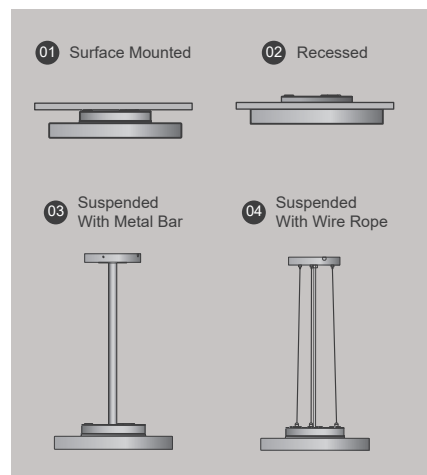


Optional



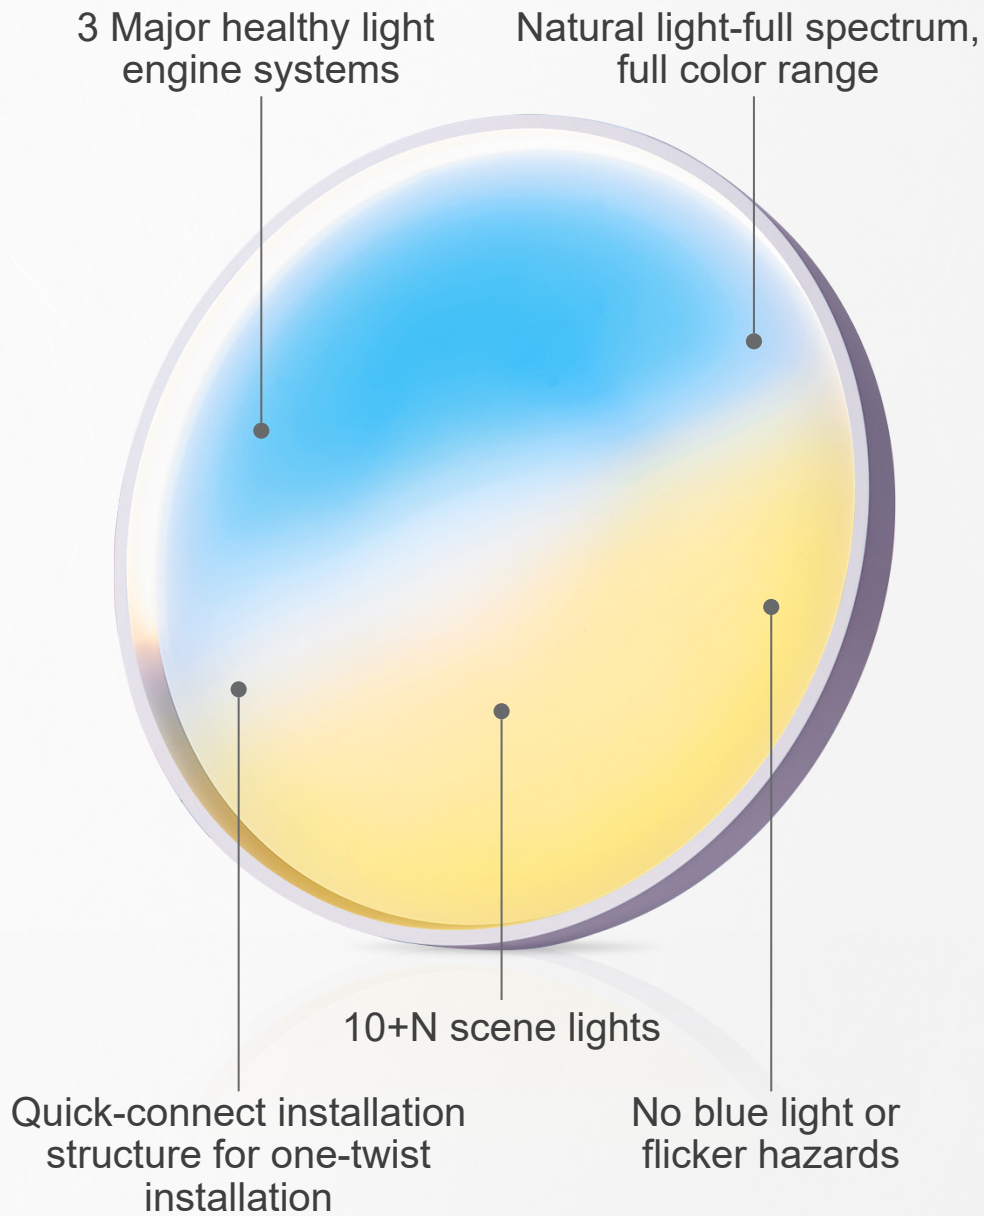



Skyline Light

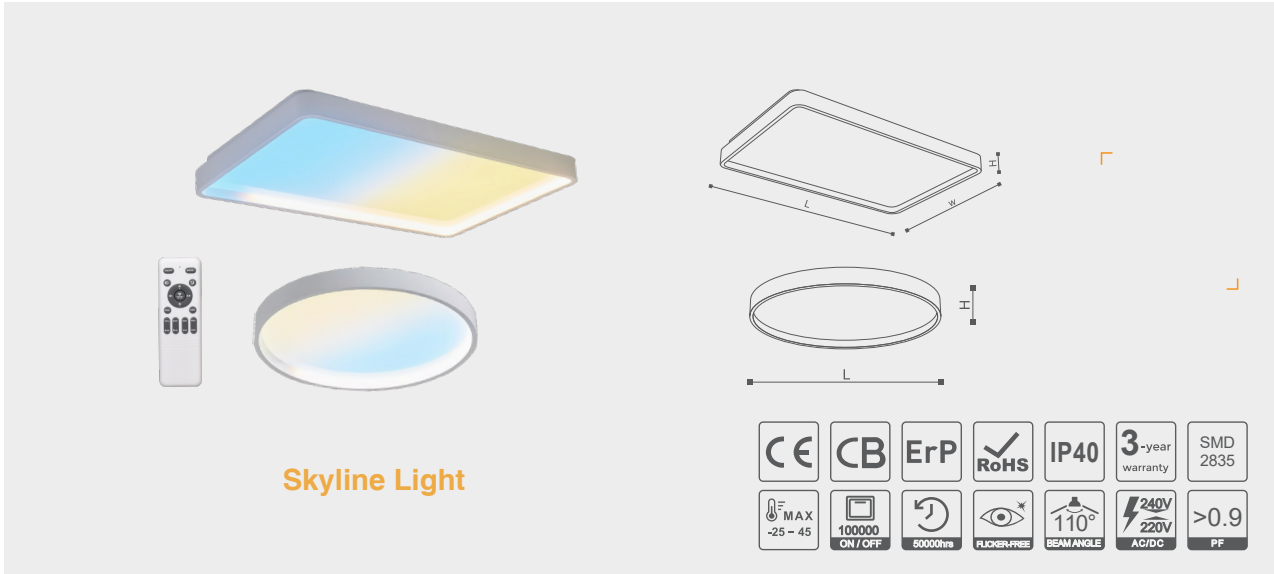


Skyline Light

Product Code	Size (mm)	Wattage	Luminous Flux	CCT	CRI	Skyline
CLS-42-60A1	Φ420*86mm	60W	3000lm	1800-12000K RGB	typ 97	YES
CLS-56-110A1	Φ560*86mm	110W	5500lm	1800-12000K RGB	typ 97	YES
CLS-42-48A2	Φ420*63mm	48W	2400lm	1800-12000K RGB	typ 97	NO
CLS-56-80A2	Φ560*63mm	80W	4000lm	1800-12000K RGB	typ 97	NO
CLS-6060-110B1	600*600*85mm	110W	5500lm	1800-12000K RGB	typ 97	YES
CLS-9060-150B1	900*600*85mm	150W	7500lm	1800-12000K RGB	typ 97	YES
CLS-5959-80B2	590*590*63mm	80W	4000lm	1800-12000K RGB	typ 97	NO
CLS-9060-120B2	890*590*63mm	120W	6000lm	1800-12000K RGB	typ 97	NO

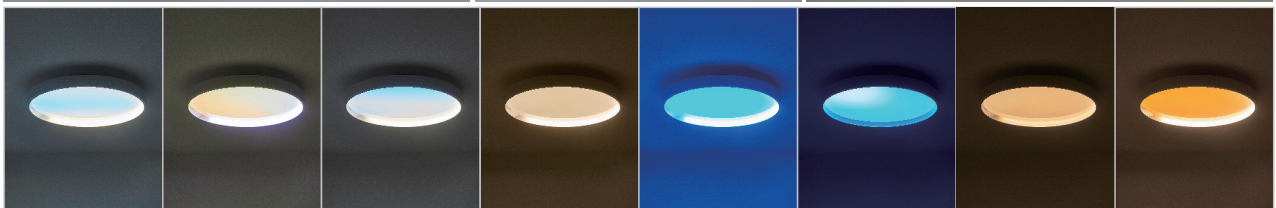

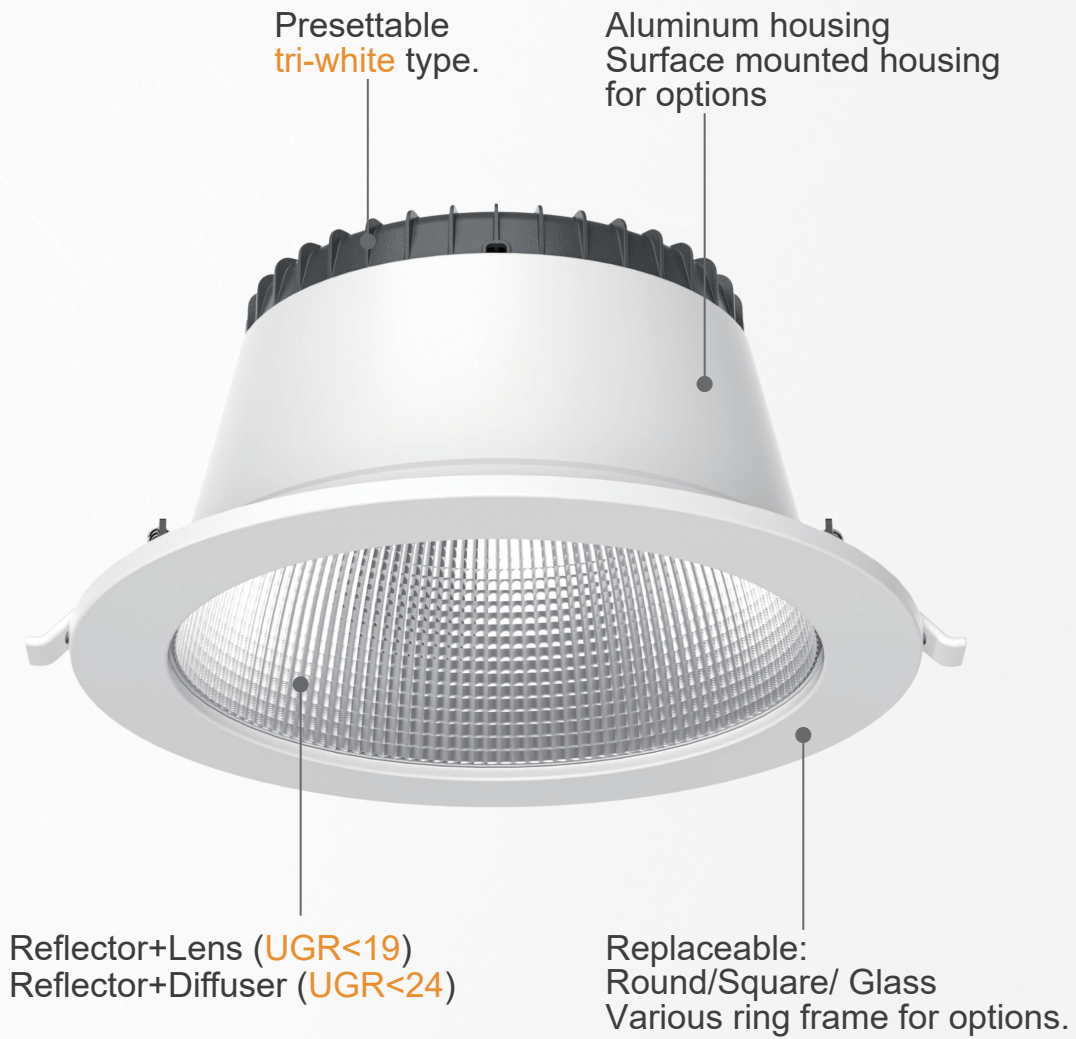

All in one
LED downlight

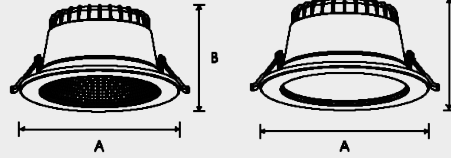


All in one
LED downlight



Product Code	Size (mm)	Cutout (mm)	Wattage	Light Efficiency	Lumen	UGR	Beam Angle
DLU1-4-10CCT	Φ114*66	Φ90-102	10 W	120Lm/W	1200 lm	<24	60
DLU1-6-20CCT	Φ174*87	Φ145-155	20 W	120Lm/W	2400 lm	<24	60
DLU1-8-35CCT	Φ232*110	Φ195-210	35 W	120Lm/W	4200 lm	<24	60
DLU2-4-10CCT	Φ114*66	Φ90-102	10 W	100Lm/W	1000 lm	<19	80
DLU2-6-20CCT	Φ174*87	Φ145-155	20 W	100Lm/W	2000 lm	<19	80
DLU2-8-35CCT	Φ232*110	Φ195-210	35 W	100Lm/W	3500 lm	<19	80





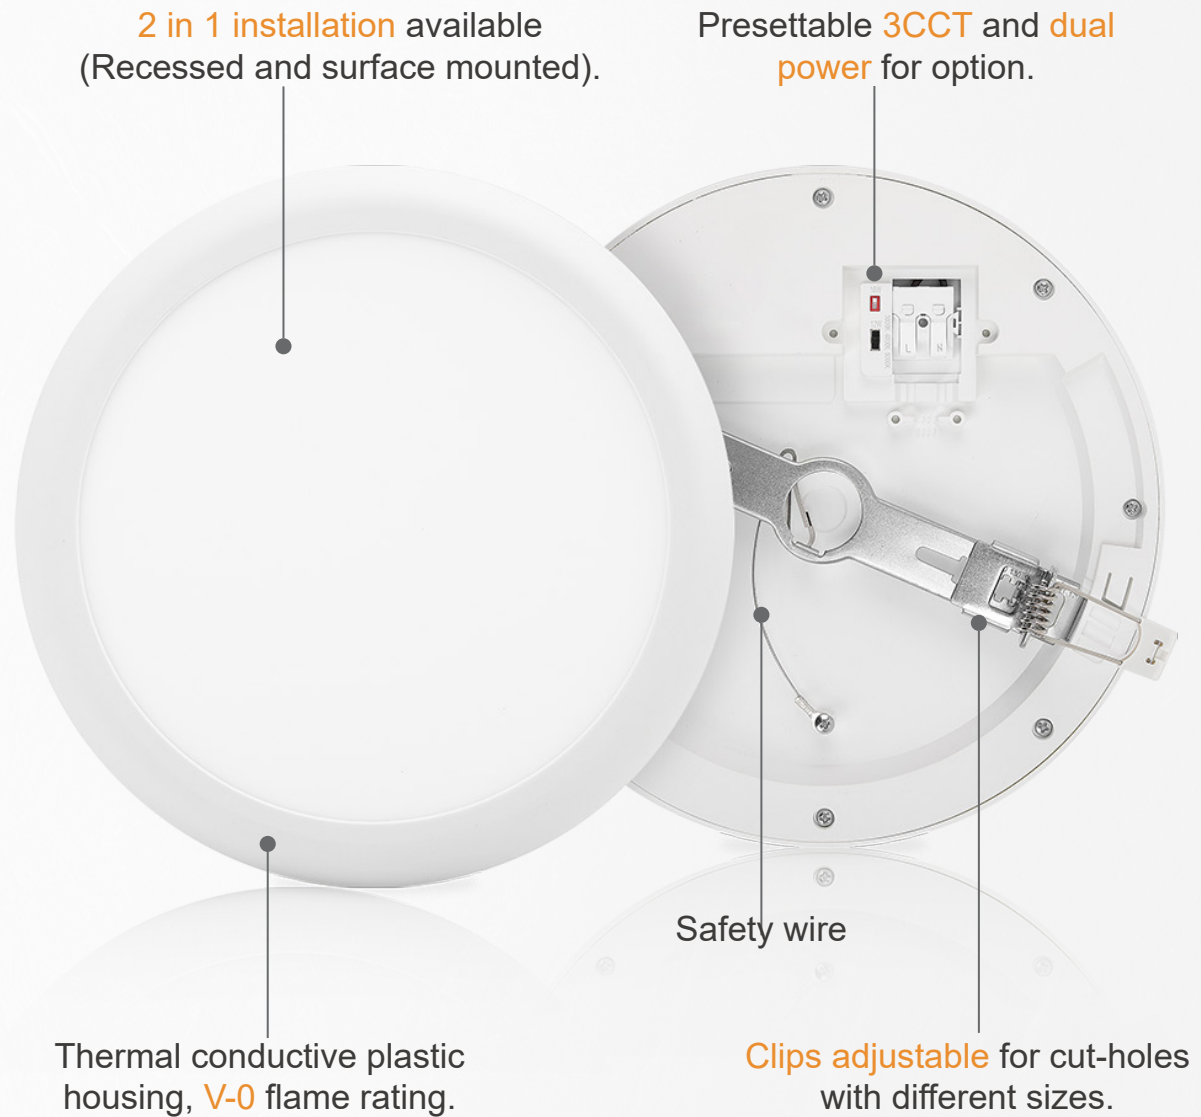


Multi-function LED Ceiling Downlight




Multi-function LED Ceiling Downlight

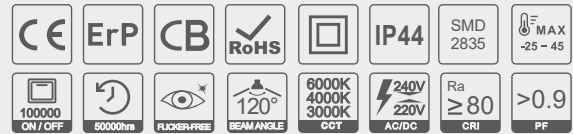


Product Code	Size (mm)	Cutout (mm)	Wattage	Lumen
DLR1-180-DP3C	Φ180*20.5	Φ80-160	8W/ 12W	640/900 lm 680/960 lm 600/840 lm
DLR1-220-DP3C	Φ220*21.5	Φ120-200	12W/ 18W	1140/1530 lm 1200/1710 lm 1080/1440 lm
DLR1-300-DP3C	Φ300*25	Φ150-270	18W/ 25W	1800/2250 lm 1890/2375 lm 1710/2125 lm

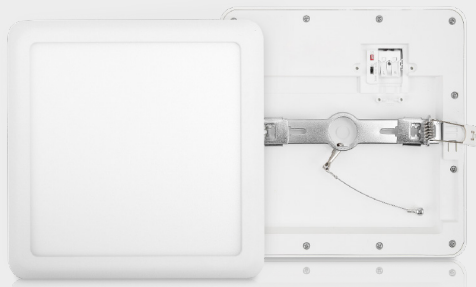



Multi-function LED Ceiling Downlight




Product Code	Size (mm)	Cutout (mm)	Wattage	Lumen
DLS1-180-DP3C	180*180*20.5	80-160	8W/ 12W	640/900 lm 680/960 lm 600/840 lm
DLS1-220-DP3C	220*220*21.5	120-200	12W/ 18W	1140/1530 lm 1200/1710 lm 1080/1440 lm
DLS1-300-DP3C	300*300*25	150-270	18W/ 25W	1800/2250 lm 1890/2375 lm 1710/2125 lm

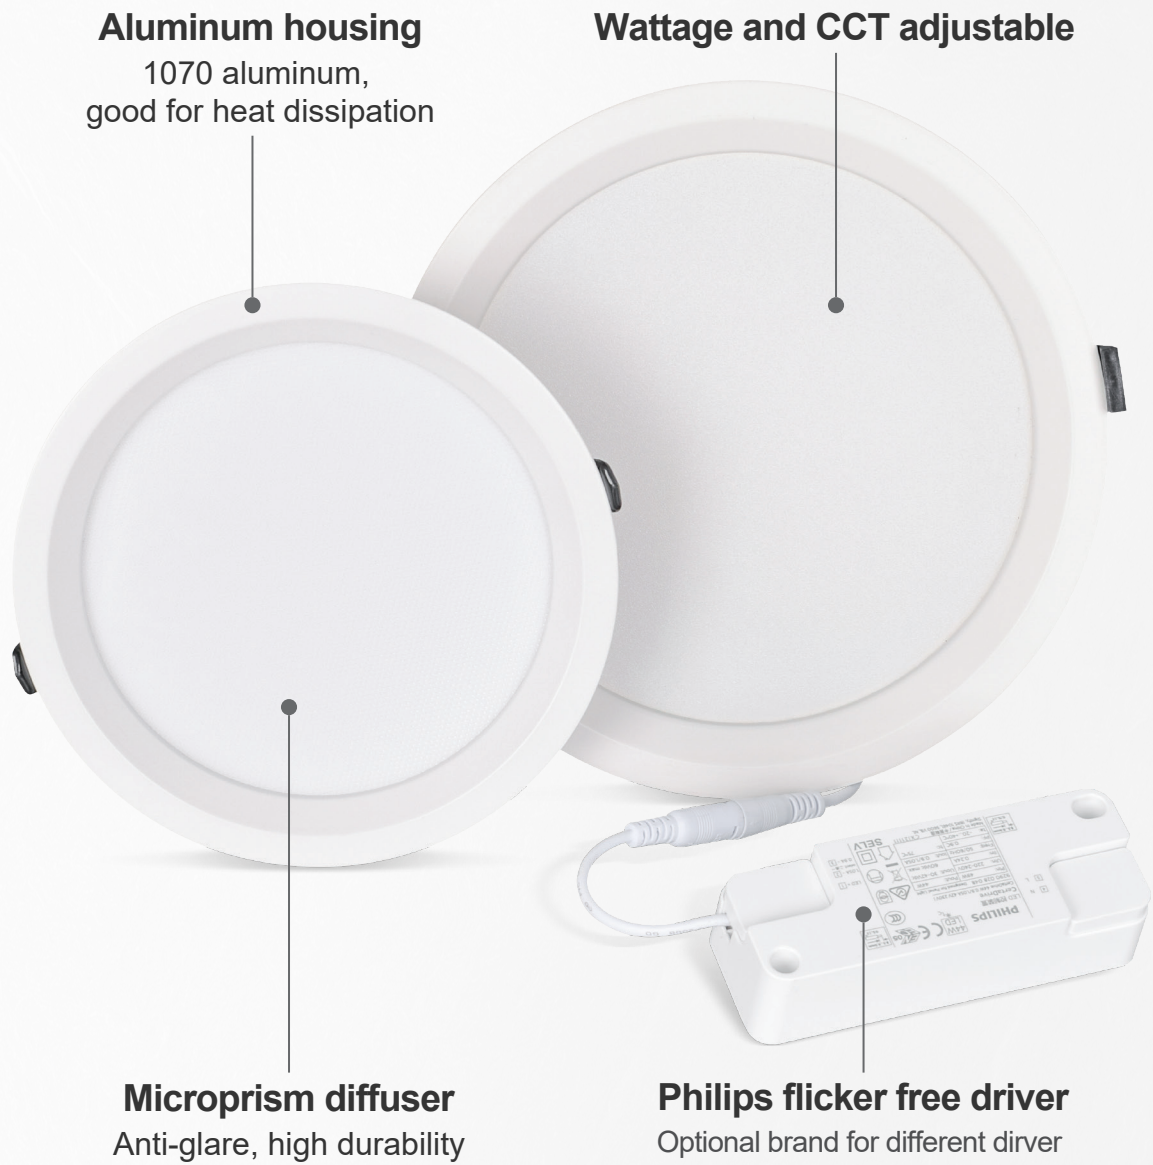


LED DOWNLIGHT



LED DOWNLIGHT

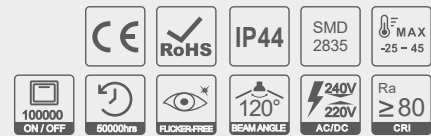

	Product Code	Size (mm)	Cutout (mm)	Wattage	Light Efficiency	Lumen	CCT	PF
	DLH1-3-5W	Φ90*35	Φ75	5W	100Lm/W	500Lm	3000k-6500k	>0.5
	DLH1-4-9W	Φ135*35	Φ120	9W	100Lm/W	900Lm	3000k-6500k	>0.5
	DLH1-5-15W	Φ165*35	Φ150	15W	100Lm/W	1500Lm	3000k-6500k	>0.5
	DLH1-6-18W	Φ185*36	Φ170	18W	125Lm/W	2250Lm	3000k-6500k	>0.9
	DLH1-6-24W	Φ185*36	Φ170	24W	125Lm/W	3000Lm	3000k-6500k	>0.9
	DLH1-8-24W	Φ230*39	Φ220	24W	125Lm/W	3000Lm	3000k-6500k	>0.9
	DLH1-8-36W	Φ230*39	Φ220	36W	125Lm/W	4500Lm	3000k-6500k	>0.9
	DLH1-6-DP3C	Φ185*36	Φ170	15W/17W 19W/21W 22W/24W 26W/29W	120Lm/W	1800Lm/2040Lm 2280Lm/2520Lm 2640Lm/2880Lm 3210Lm/3360Lm	3000k 4000K 6500k	>0.9
	DLH1-8-DP3C	Φ230*39	Φ220	15W/17W 19W/21W 22W/24W 26W/29W	120Lm/W	1800Lm/2040Lm 2280Lm/2520Lm 2640Lm/2880Lm 3210Lm/3360Lm	3000k 4000K 6500k	>0.9

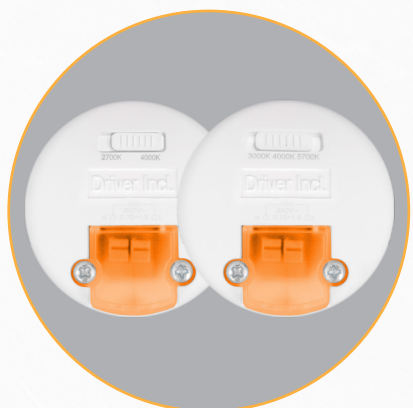

2CCT & 3CCT




Driver built-in, non-dimmable and triac dimmable for option.

IP44
Moisture Proof




Anti-glare, white version UGR<19 ,
black version UGR<16.


UGR <19 LED Spot Light

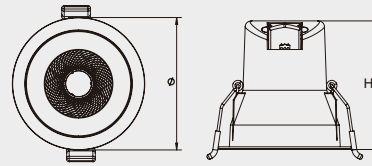

UGR <19
LED Spot Light

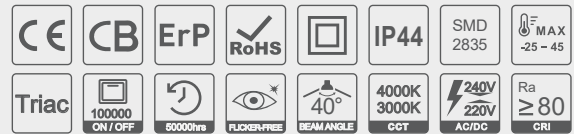

Product code	Size (mm)	Cutout (mm)	Wattage	CCT	Luminous Flux	Colors
DLF1-3W-6	Φ81*78.7	Φ68-73	6 W	3000K 4000K	400 lm 480 lm	White
DLF1-4W-9	Φ103*90.7	Φ90-95	9 W	3000K 4000K	600 lm 650 lm	White
DLF1-3B-6	Φ81*78.7	Φ68-73	6 W	3000K 4000K	400 lm 480 lm	Black

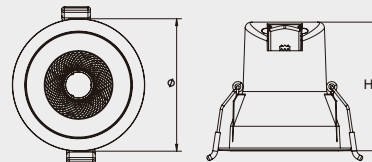

UGR <19 3CCT
LED Spot Light




Product code	Size (mm)	Cutout (mm)	Wattage	CCT	Luminous Flux	Colors
DLF1-4W-9D	Φ103*90.7	Φ90-95	9 W	2700K 3400K 4000K	850 lm 900 lm 880 lm	White
DLF1-4B-9D	Φ103*90.7	Φ90-95	9 W	2700K 3400K 4000K	600 lm 650 lm 650 lm	Black



Surface-mounted LED downlight




Surface-mounted LED downlight

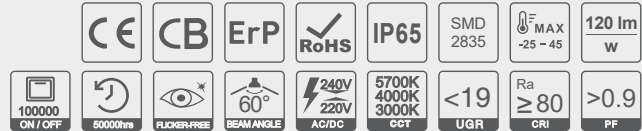

Product code	Size (mm)	Wattage	Luminous Flux	Driver	Colors
DLM1-125-14A1	Φ86*125	14W	1512/1680/1596 lm	On-off	White/Black
DLM1-136-ADP3C	Φ136*150	14W 20W	1512/1680/1596 lm 2160/2400/2280 lm	On-off	White/Black
DLM1-136-ADT8	Φ184*164	28W 40W	3024/3360/3192 lm 4320/4800/4560 lm	DT8 DALI	White/Black
DLM1-184-ADP3C	Φ184*164	28W 40W	3024/3360/3192 lm 4320/4800/4560 lm	On-off	White/Black
DLM1-184-ADT8	Φ184*164	28W 40W	3024/3360/3192 lm 4320/4800/4560 lm	DT8 DALI	White/Black




Surface-mounted LED downlight

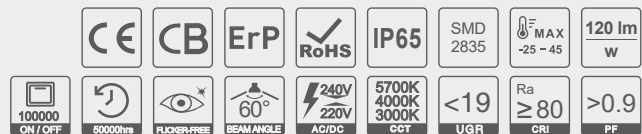

Product code	Size (mm)	Wattage	Luminous Flux	Driver	Colors
DLM1-125-14B1	Φ86*105	14W 20W	1512/1680/1596 lm 2160/2400/2280 lm	On-off	White/Black
DLM1-136-BDP3C	Φ136*120	14W 20W	1512/1680/1596 lm 2160/2400/2280 lm	On-off	White/Black
DLM1-136-BDT8	Φ136*120	14W 20W	1512/1680/1596 lm 2160/2400/2280 lm	DT8 DALI	White/Black
DLM1-184-BDP3C	Φ184*130	28W 40W	3024/3360/3192 lm 4320/4800/4560 lm	On-off	White/Black
DLM1-184-BDT8	Φ184*130	28W 40W	3024/3360/3192 lm 4320/4800/4560 lm	DT8 DALI	White/Black




LED downlight

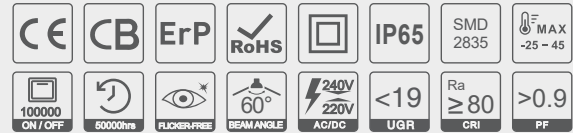

	Product Code	Size (mm)	Wattage	Light Efficiency	Lumen	CCT
	DLC-6-12C1	Φ165*60	12W	150Lm/W	1800LM	4000K
	DLC-8-24C1	Φ220*66.5	24W	150Lm/W	3600LM	4000K
	DLC-4-7C2	Φ110*50	7W	110Lm/W	770LM	4000K
	DLC-5-7C2	Φ140*55	7W	120Lm/W	840LM	4000K
	DLC-6-15C2	Φ165*60	15W	120Lm/W	1800LM	4000K
	DLC-8-28C2	Φ220*66.5	28W	120Lm/W	3360LM	4000K
	DLC-6-15C2-3CCT	Φ165*60	15W	120Lm/W	1800LM	3000-4000-5700K
	DLC-8-28C2-3CCT	Φ220*66.5	28W	120Lm/W	3360LM	3000-4000-5700K




IP54 Waterproof High-Efficiency Downlight

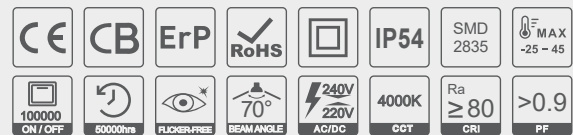


	Product Code	Size (mm)	Cutout (mm)	Wattage	Light Efficiency	Lumen
	DLS-3-10W	Φ95*48	Φ75-85	10w	140Lm/W	1400Lm
	DLS-4-15W	Φ110*53.5	Φ90-100	15w	140Lm/W	2100Lm
	DLS-5-18W	Φ135*61	Φ110-125	18w	160Lm/W	2880Lm
	DLS-6-25W	Φ175*69.5	Φ140-165	25w	160Lm/W	4000Lm
	DLS-7-35W	Φ195*74	Φ160-185	35w	160Lm/W	5600Lm




LED Slim Panel Downlight



**Round Embedded
LED Slim Panel Downlight**

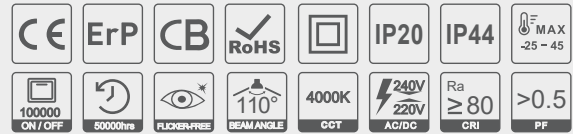


	Product Code	Size (mm)	Cutout (mm)	Wattage	Light Efficiency	Lumen	UGR	IP RATING
	DL-3-3C1	Φ85x15	Φ75	3W	80lm/W	240 lm	<22/<19	IP20/IP44
	DL-4-6C1	Φ120x15	Φ105	6W	80lm/W	480 lm	<22/<19	IP20/IP44
	DL-5-9C1	Φ145x15	Φ130	9W	80lm/W	720 lm	<22/<19	IP20/IP44
	DL-6-12C1	Φ170x15	Φ155	12W	100lm/W	1200 lm	<22/<19	IP20/IP44
	DL-7-15C1	Φ200x15	Φ175	15W	100lm/W	1500 lm	<22/<19	IP20/IP44
	DL-8-18C1	Φ225x15	Φ210	18W	120lm/W	2160 lm	<22/<19	IP20/IP44
	DL-10-24C1	Φ300x15	Φ280	24W	120lm/W	2880 lm	<22/<19	IP20/IP44
	DL-8-18B1	Φ225x15	Φ210	18W	140lm/W	2520 lm	<22/<19	IP20/IP44
	DL-10-24B1	Φ300x15	Φ280	24W	140lm/W	3360 lm	<22/<19	IP20/IP44

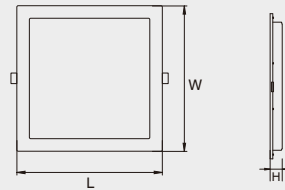

**Square Embedded
LED Slim Panel Downlight**




	Product Code	Size (mm)	Cutout (mm)	Wattage	Light Efficiency	Lumen	UGR	IP RATING
	DL-3-3C2	85x85x15	75x75	3W	80lm/W	240 lm	<22/<19	IP20/IP44
	DL-4-6C2	120x120x15	105x105	6W	80lm/W	480 lm	<22/<19	IP20/IP44
	DL-5-9C2	145x145x15	130x130	9W	80lm/W	720 lm	<22/<19	IP20/IP44
	DL-6-12C2	170x170x15	155x155	12W	100lm/W	1200 lm	<22/<19	IP20/IP44
	DL-7-15C2	200x200x15	175x175	15W	100lm/W	1500 lm	<22/<19	IP20/IP44
	DL-8-18C2	225x225x15	210x210	18W	120lm/W	2160 lm	<22/<19	IP20/IP44
	DL-10-24C2	300x300x15	280x280	24W	120lm/W	2880 lm	<22/<19	IP20/IP44
	DL-8-18B2	225x225x15	210x210	18W	140lm/W	2520 lm	<22/<19	IP20/IP44
	DL-10-24B2	300x300x15	280x280	24W	140lm/W	3360 lm	<22/<19	IP20/IP44




Round Surface mounting
LED Slim Panel Downlight



	Product Code	Size (mm)	Wattage	Light Efficiency	Lumen	UGR	IP RATING
	DL-4-6C3	Φ122x35	6W	80lm/W	480 lm	<22/<19	IP20/IP44
	DL-6-12C3	Φ169x35	12W	100lm/W	1200 lm	<22/<19	IP20/IP44
	DL-8-18C3	Φ223x35	18W	120lm/W	2160 lm	<22/<19	IP20/IP44
	DL-10-24C3	Φ300x35	24W	120lm/W	2880 lm	<22/<19	IP20/IP44
	DL-8-18B3	Φ223x35	18W	140lm/W	2520 lm	<22/<19	IP20/IP44
	DL-10-24B3	Φ300x35	24W	140lm/W	3360 lm	<22/<19	IP20/IP44



Square Surface mounting
LED Slim Panel Downlight

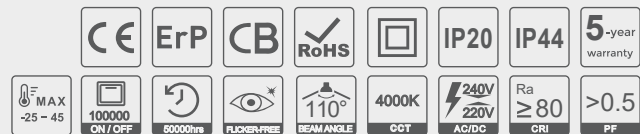

	Product Code	Size (mm)	Wattage	Light Efficiency	Lumen	UGR	IP RATING
	DL-4-6C4	122x122x35	6W	80lm/W	480 lm	<22/<19	IP20/IP44
	DL-6-12C4	167x167x35	12W	100lm/W	1200 lm	<22/<19	IP20/IP44
	DL-8-18C4	221x221x35	18W	120lm/W	2160 lm	<22/<19	IP20/IP44
	DL-10-24C4	300x300x35	24W	120lm/W	2880 lm	<22/<19	IP20/IP44
	DL-8-18B4	221x221x35	18W	140lm/W	2520 lm	<22/<19	IP20/IP44
	DL-10-24B4	300x300x35	24W	140lm/W	3360 lm	<22/<19	IP20/IP44



LED HIGH BAY



210
Φuse (lm)

200 Lm/w
LED High bay Light



	Product code	Size (mm)	Wattage	Light Efficiency	CCT	Beam angle
	HB-325-240W2	Φ390*68	200-180-160-140-120-100W	200LM/W	4000K/5000K/6500K	60°/90°
	HB-325-150W2	Φ390*68	150-135-120-105-90-75W	200LM/W	4000K/5000K/6500K	60°/90°



210
Φuse (lm)

200 Lm/w
LED High bay Light



	Product code	Size (mm)	Wattage	Light Efficiency	CCT	Beam angle
	HB-300-200W2	Φ280*160	200-150-120W	200LM/W	4000K/5000K/6500K	60°/90°/110°
	HB-300-150W2	Φ280*160	150-120-100W	200LM/W	4000K/5000K/6500K	60°/90°/110°
	HB-300-120W2	Φ280*160	120-100-80W	200LM/W	4000K/5000K/6500K	60°/90°/110°
	HB-300-80W2	Φ280*160	80-60-50W	200LM/W	4000K/5000K/6500K	60°/90°/110°



210
Φuse (lm)

185 Lm/w
LED High bay Light



	Product code	Size (mm)	Wattage	Light Efficiency	CCT	Beam angle
	HB-246-100B2	Φ246*155	100W	185LM/W	4000K/5000K/5700K	60°/90°/110°
	HB-266-150B2	Φ266*160	150W	185LM/W	4000K/5000K/5700K	60°/90°/110°
	HB-300-200B2	Φ300*169	200W	185LM/W	4000K/5000K/5700K	60°/90°/110°



3CCT LED UFO
HIGH-BAY LIGHT




	Product code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	CCT	Beam angle
	HB-245-100B2	Φ246*148	100W	160LM/W	16000lm	4000K	60°/90°/120°
	HB-280-150B2	Φ280*148	150W	160LM/W	24000lm	4000K	60°/90°/120°
	HB-330-200B2	Φ330*148	200W	160LM/W	32000lm	4000K	60°/90°/120°
	HB-245-100B2-3CCT	Φ246*148	100W	160LM/W	16000lm	3CCT	60°/90°/120°
	HB-280-150B2-3CCT	Φ280*148	150W	160LM/W	24000lm	3CCT	60°/90°/120°
	HB-330-200B2-3CCT	Φ330*148	200W	160LM/W	32000lm	3CCT	60°/90°/120°



140/160 Lm/w
LED High bay Light



	Product code	Size (mm)	Wattage	Light Efficiency	CCT	Beam angle
	HB-240-100B2	Φ240*157.8	100W-80W-60W	140LM/W	4000K/5000K/6500K	90°/120°
	HB-280-150B2	Φ280*157.8	150W-100W-80W	140LM/W	4000K/5000K/6500K	90°/120°
	HB-320-200B2	Φ320*157.8	200W-150W-100W	140LM/W	4000K/5000K/6500K	90°/120°
	HB-320-240B2	Φ320*157.8	240W-200W-150W	140LM/W	4000K/5000K/6500K	90°/120°
	HB-240-100W2	Φ240*157.8	100W-80W-60W	160LM/W	4000K/5000K/6500K	90°/120°
	HB-280-150W2	Φ280*157.8	150W-100W-80W	160LM/W	4000K/5000K/6500K	90°/120°
	HB-320-200W2	Φ320*157.8	200W-150W-100W	160LM/W	4000K/5000K/6500K	90°/120°
	HB-320-240W2	Φ320*157.8	240W-200W-150W	160LM/W	4000K/5000K/6500K	90°/120°

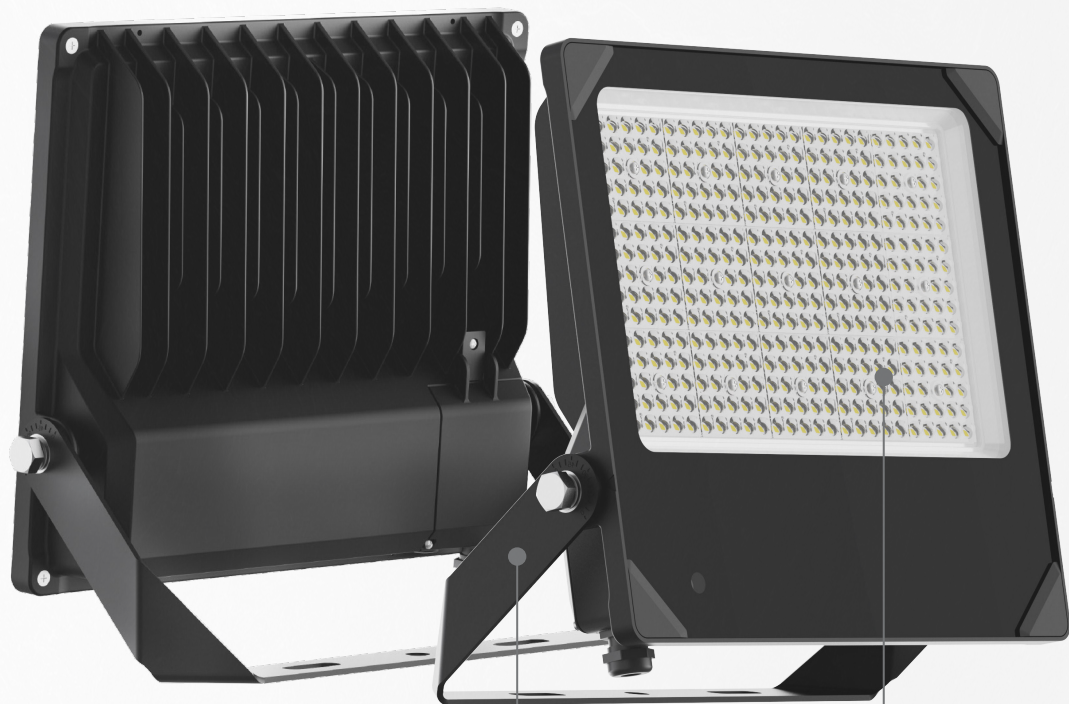


Easy installation

150lm/W

LED Flood Light




**3CCT Hie Lens
LED Flood Light**

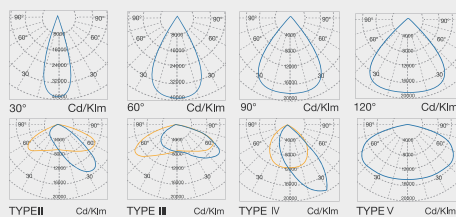


CE	CB	ErP	UK CA	IP65	IK08	5-year warranty	MAX -25 + 45	Lumileds 2835
SOSEN	150 lm W	FLICKER-FREE	50000 ON / OFF	50000hrs	6500K 5000K 4000K CCT	220V 120V AC/DC	Ra ≥ 80 CRI	>0.9 PF

Product Code	Size (mm)	Wattage	Luminous Flux	Beam Angle
LF-384-200A1-3CCT	384x353x59	200-150-120W	30000-22500-18000 lm	30/60/90/120
LF-333-100A1-3CCT	333x302x59	100-80-60W	15000-12000-9000 lm	30/60/90/120

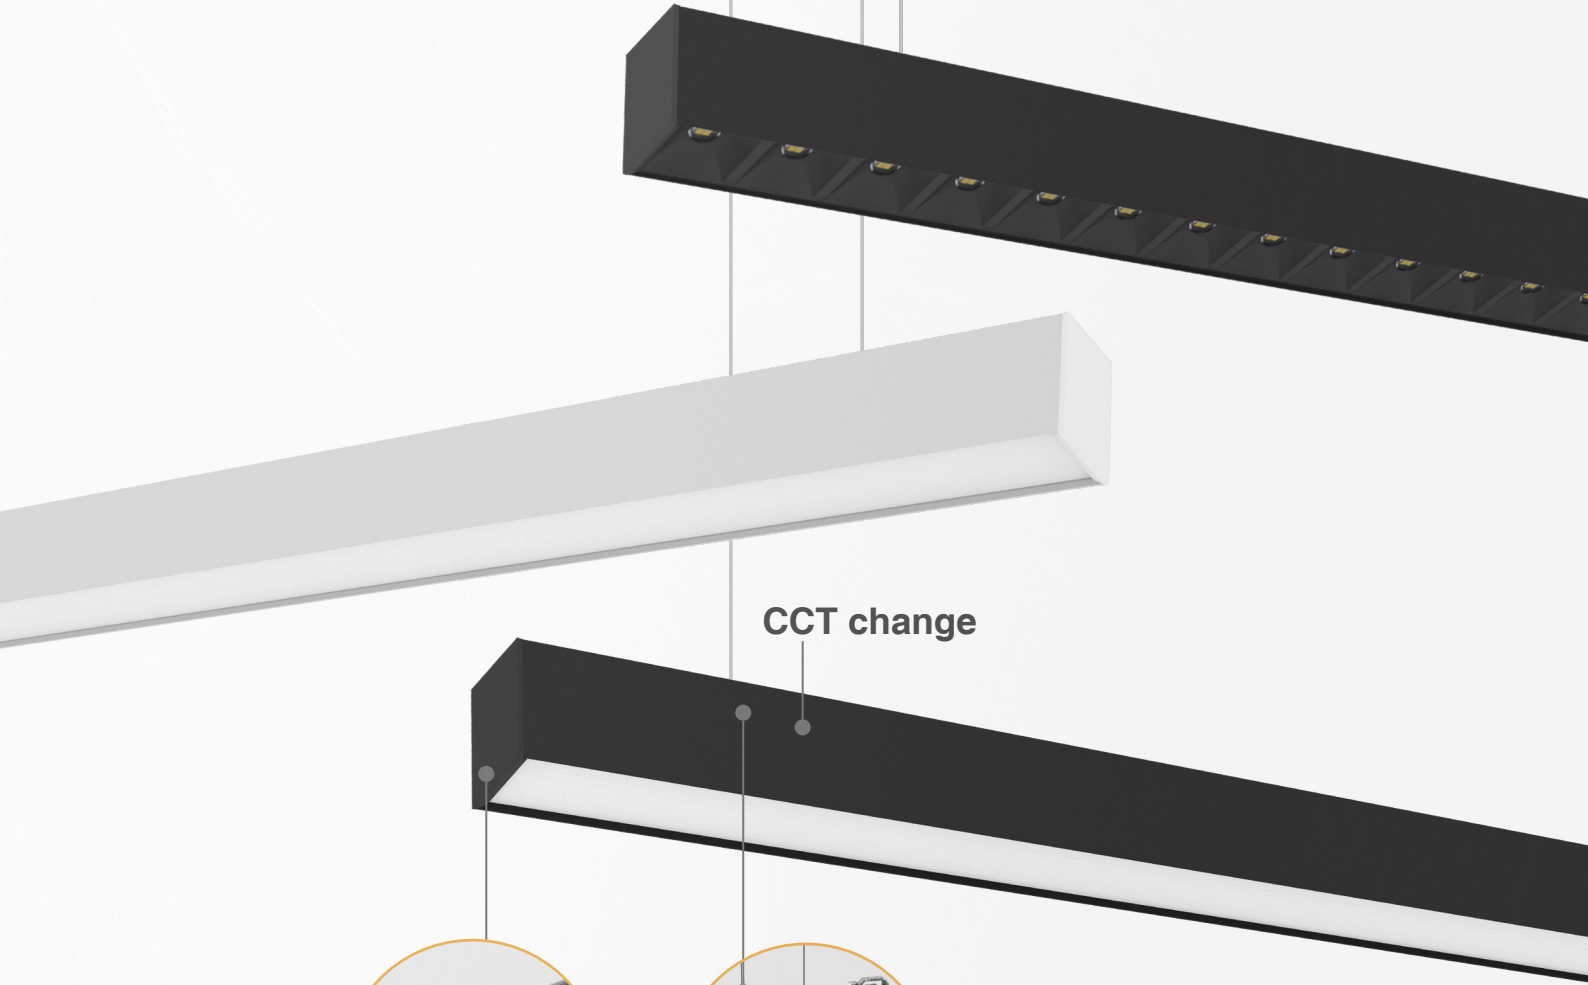

CCT change




10" Fast Connection





4-in-1 Installations

LED LINEAR LIGHT SERIES

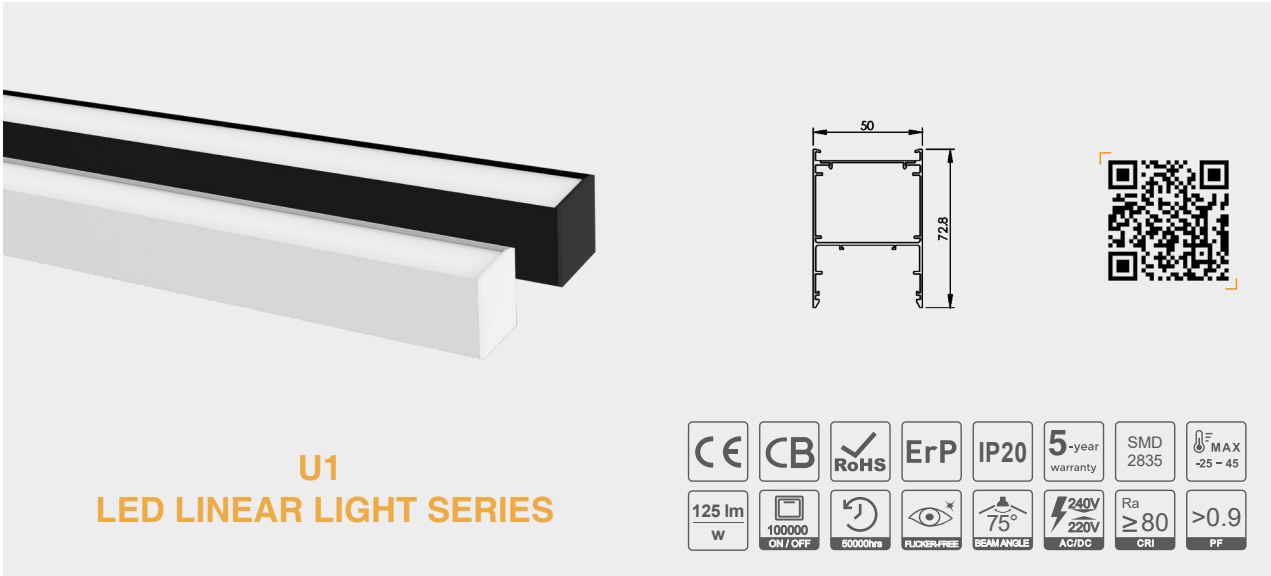

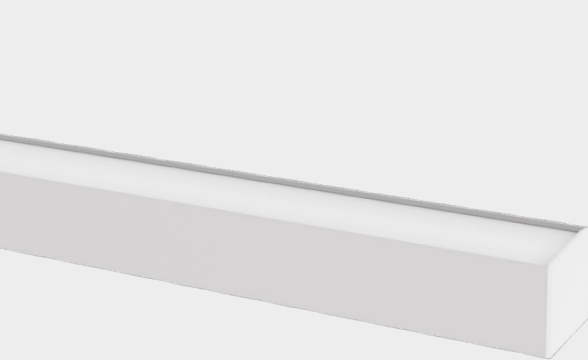

Product Code	Size (mm)	Wattage	Luminous Flux	CCT	Lampshade & Colors	Driver
LL-12-32U1-WO 840	L1200xW50xH72.8	32W	4000LM	4000K	white+Micro-Prism	BOKE on-off
LL-12-32U1-BO 840	L1200xW50xH72.8	32W	4000LM	4000K	black+Micro-Prism	BOKE on-off
LL-12-32U1-WD CCT	L1200xW50xH72.8	32W	4000LM	3000K 3500K 4000K	white+Micro-Prism	BOKE DALI
LL-12-32U1-BD CCT	L1200xW50xH72.8	32W	4000LM	3000K 3500K 4000K	black+Micro-Prism	BOKE DALI
LL-15-40U1-WO 840	L1500xW50xH72.8	40W	5000LM	4000K	white+Micro-Prism	BOKE on-off
LL-15-40U1-BO 840	L1500xW50xH72.8	40W	5000LM	4000K	black+Micro-Prism	BOKE on-off
LL-15-40U1-WD CCT	L1500xW50xH72.8	40W	5000LM	3000K 3500K 4000K	white+Micro-Prism	BOKE DALI
LL-15-40U1-BD CCT	L1500xW50xH72.8	40W	5000LM	3000K 3500K 4000K	black+Micro-Prism	BOKE DALI

A1
LED LINEAR LIGHT SERIES

CE	CB	RoHS	ErP	IP20	5-year warranty	SMD 2835	5 MAX -25 - 45
120 lm W	100000 ON / OFF	50000hrs	FLICKER-FREE	BEAM ANGLE 100°	240V AC/DC 220V	Ra ≥ 80	>0.9 PF



Product Code	Size (mm)	Wattage	Luminous Flux	CCT	Lampshade & Colors
 LL-12-30A1-WO 840	L1200xW50xH72.8	30W	3600LM	4000K	white+Haze diffuser
 LL-15-40A1-WO 840	L1500xW50xH72.8	40W	4800LM	4000K	white+Haze diffuser






L1
LED LINEAR LIGHT SERIES

CE	CB	RoHS	ErP	IP20	5-year warranty	5 MAX -25 - 45	
160 lm W	100000 ON / OFF	50000hrs	FLICKER-FREE	BEAM ANGLE 80°	240V AC/DC 220V	Ra ≥ 80	>0.9 PF

Product Code	Size (mm)	Wattage	Luminous Flux	CCT	Lampshade & Colors	Driver
 LL-12-24L1-BO 840	L1147xW50xH72.8	24W	3840LM	4000K	black housing+ black cover+lens	BOKE on-off
 LL-12-24L1-BD 840	L1147xW50xH72.8	24W	3840LM	4000K	black housing+ black cover+lens	BOKE DALI

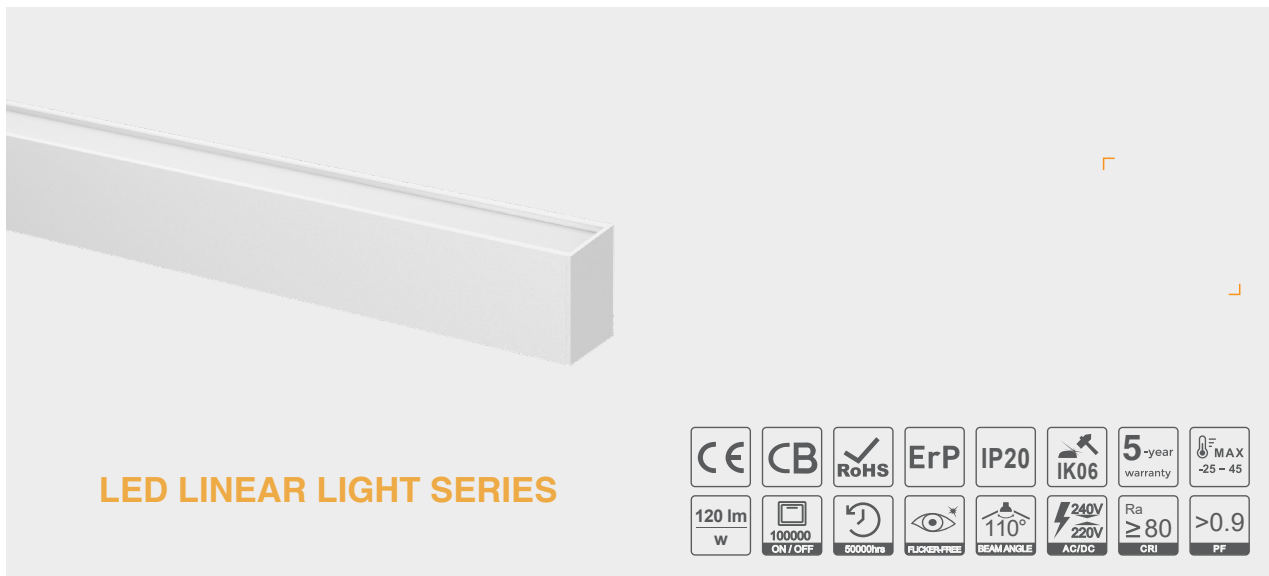



Product Code	Size (mm)	Wattage	Luminous Flux	CCT	Lampshade & Colors
LL-12-30A2-WO-840	L1200xW35xH70	30w	3600lm	4000K	white+Haze diffuser
LL-12-40A2-WO-840	L1200xW35xH70	40w	4800lm	4000K	white+Haze diffuser
LL-15-30A2-WO-840	L1500xW35xH70	30w	3600lm	4000K	white+Haze diffuser
LL-15-40A2-WO-840	L1500xW35xH70	40w	4800lm	4000K	white+Haze diffuser



LED Bulb Lights





A60 E27

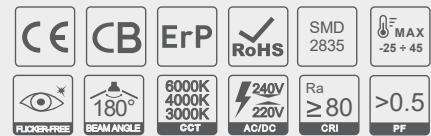

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Dim	driver
	A60	60*108	7W	85Lm/W	600lm	E27	linear
	A60	60*108	9W	90Lm/W	820lm	E27	linear
	A60	60*112	12W	90Lm/W	1050lm	E27	linear
	A60	60*124	15W	100Lm/W	1500lm	E27	linear
	A60	60*108	3.4W	135Lm/W	470Lm	E27	IC
	A60	60*108	5.9W	135Lm/W	806Lm	E27	IC
	A60	60*108	7.8W	135Lm/W	1060Lm	E27	IC
	A60	60*120	11W	135Lm/W	1520Lm	E27	IC
	A60	60*108	2.9W	160Lm/W	470Lm	E27	IC
	A60	60*108	5W	160Lm/W	806Lm	E27	IC
	A60	60*108	6.6W	160Lm/W	1060Lm	E27	IC
	A60	60*120	9.5W	160Lm/W	1520Lm	E27	IC




G45 E14/E27

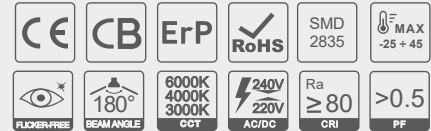

	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Dim	driver
	G45	45*90	4.9W	85Lm/W	425lm	E14/E27	linear
	G45	45*90	6W	85Lm/W	510lm	E14/E27	linear
	G45	45*90	7W	85Lm/W	600lm	E14/E27	linear
	G45	45*90	2.9W	160Lm/W	464Lm	E14/E27	IC
	G45	45*90	4.9W	160Lm/W	784Lm	E14/E27	IC




C37 E14/E27



	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Dim	driver
	C37	37*101	4.9W	85Lm/W	425lm	E14/E27	linear
	C37	37*101	6W	85Lm/W	510lm	E14/E27	linear
	C37	37*101	7W	85Lm/W	600lm	E14/E27	linear
	C37	37*101	2.9W	160Lm/W	464Lm	E14/E27	IC
	C37	37*101	4.9W	160Lm/W	784Lm	E14/E27	IC




	Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Dim	driver	Beam Angle
	GU10	50*54	3W	85Lm/W	255lm	GU10	linear	100°
	GU10	50*54	4W	85Lm/W	345lm	GU10	linear	100°
	GU10	50*54	5W	90Lm/W	452lm	GU10	linear	100°
	GU10	50*54	6W	85Lm/W	510lm	GU10	linear	100°
	GU10	50*54	7W	85Lm/W	595Lm	GU10	linear	100°
	GU10	50*54	8W	85Lm/W	680Lm	GU10	linear	100°
	GU10-38°	50*54	2.9W	160Lm/W	464Lm	GU10	IC	38°
	glass GU10-30°	50*54	8W	160Lm/W	1280Lm	GU10	IC	30°

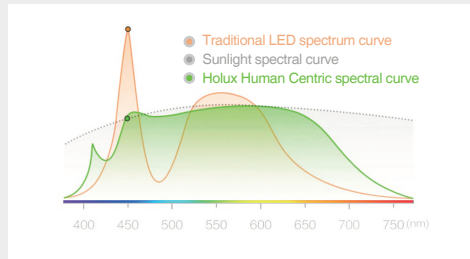

Less blue light / Full spectrum
LED Bulb Lights-A60

- CE
- CB
- ErP
- RoHS
- 5-year warranty
- SMD 2835
- 5⁺ MAX -25 + 45
- 40000hrs
- FLICKER-FREE
- 180° BEAM ANGLE
- 4000K CCT
- 240V AC/DC 220V
- Ra ≥ 95 CRI
- >0.5 PF


Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Dim	driver
A60 E27	60*112	7W	115Lm/W	806lm	E27	IC

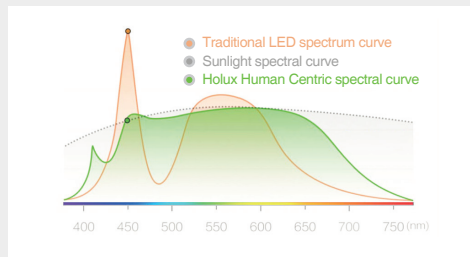

Less blue light / Full spectrum
LED Bulb Lights-G45

- CE
- CB
- ErP
- RoHS
- 5-year warranty
- SMD 2835
- 5⁺ MAX -25 + 45
- 40000hrs
- FLICKER-FREE
- 180° BEAM ANGLE
- 4000K CCT
- 240V AC/DC 220V
- Ra ≥ 95 CRI
- >0.5 PF


Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Dim	driver
G45 E27	45*77	4.3W	110Lm/W	470lm	E27	IC

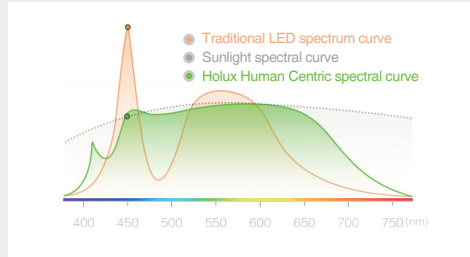

Less blue light / Full spectrum
LED Bulb Lights-C37

CE	CB	ErP	RoHS	5-year warranty	SMD 2835	MAX -25 + 45
40000hrs	FLICKER-FREE	180° BEAM ANGLE	4000K CCT	240V/220V AC/DC	Ra ≥ 95	>0.5 PF

Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Dim	driver
C37 E14	35*103	4.3W	110lm/W	470lm	E14	IC

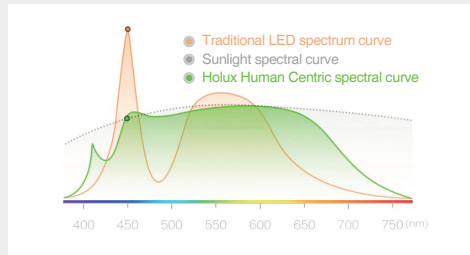

Less blue light / Full spectrum
LED Bulb Lights-GU10

CE	CB	ErP	RoHS	5-year warranty	SMD 2835	MAX -25 + 45
40000hrs	FLICKER-FREE	100° BEAM ANGLE	4000K CCT	240V/220V AC/DC	Ra ≥ 95	>0.5 PF

Product Code	Size (mm)	Wattage	Light Efficiency	Luminous Flux	Dim	driver
GU10	50*57	4.7W	100lm/W	470lm	GU10	IC

holux



www.holux.cc



Block A, No.2 XingYun Building,
No.688 Hang Xing Road,
Hangzhou, China, 310015



+86-186 5511 3201



Info@holux.cc