
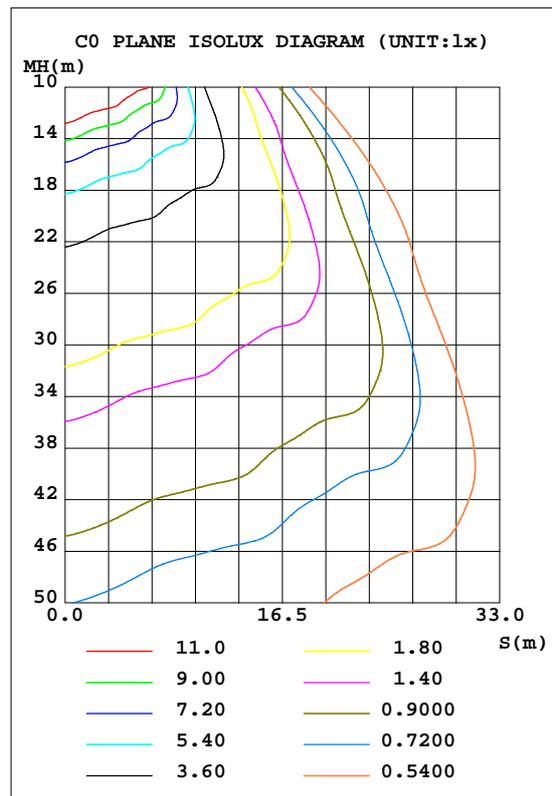


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.9V I:0.1370A P:30.10W PF:0.9540 Lamp Flux:5226.1x1 lm		
NAME: TP-15-55B2 0.2A	TYPE:	WEIGHT:
SPEC.:	DIM.: 1.507*0.075*0.07	SERIAL No.:
MFR.:	SUR.:1.507*0.075	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 173.62 lm/W			
MODEL	TP-15-55B2 0.2A	I _{max} (cd)	1838	S/MH(C0/180)	1.43
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	5226.1	h UP, DN(C0-180)	0.9, 48.8
NOMINAL FLUX(lm)	5226.1	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.9, 49.4
LAMPS INSIDE	1	h up(%)	1.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	229.3	h down(%)	98.2	CIBSE SHR MAX	1.35

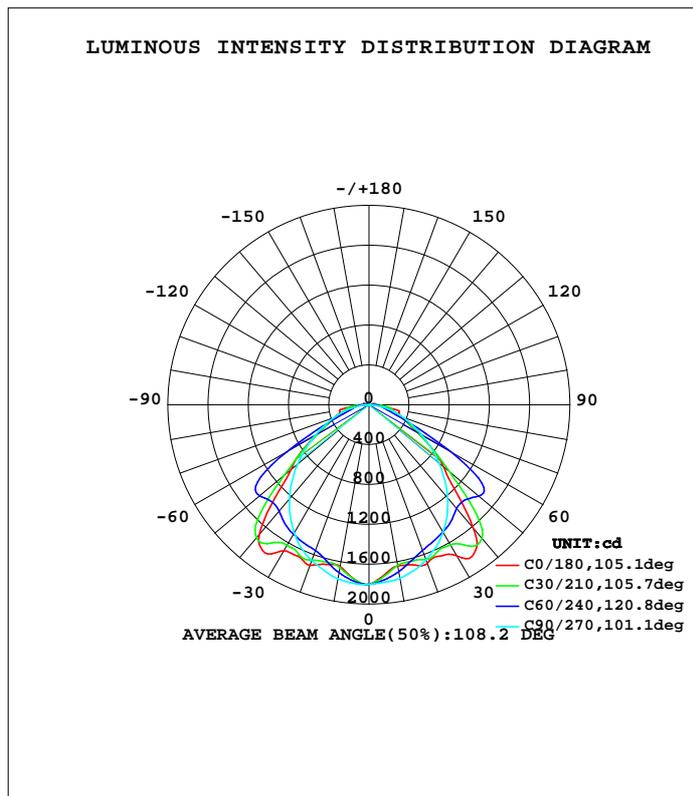

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1641	1663	1767	1670	1649	1680	1774	1675	0- 10	165.5	165.5	3.17,3.17
20	1694	1595	1657	1598	1714	1602	1664	1590	10- 20	467.2	632.7	12.1,12.1
30	1750	1546	1475	1570	1691	1578	1487	1552	20- 30	737.1	1370	26.2,26.2
40	1618	1614	1217	1567	1701	1599	1231	1588	30- 40	975.8	2346	44.9,44.9
50	973.0	1386	910.8	1422	1017	1404	929.1	1447	40- 50	1036	3381	64.7,64.7
60	559.8	567.0	608.1	600.4	609.0	600.4	623.9	594.5	50- 60	826.8	4208	80.5,80.5
70	339.4	308.3	350.9	304.1	360.4	313.4	362.1	307.4	60- 70	510.7	4719	90.3,90.3
80	250.1	182.9	142.3	182.0	290.2	187.1	148.8	182.9	70- 80	283.6	5003	95.7,95.7
90	45.36	105.9	10.38	104.8	53.98	109.3	11.05	107.1	80- 90	128.1	5131	98.2,98.2
100	55.33	40.11	6.167	40.44	48.20	42.11	5.989	40.58	90-100	47.36	5178	99.1,99.1
110	19.61	11.36	3.397	11.97	25.28	11.84	3.205	10.59	100-110	24.84	5203	99.6,99.6
120	9.893	6.449	2.917	6.987	10.20	7.330	2.781	5.975	110-120	8.433	5211	99.7,99.7
130	7.849	4.352	3.147	5.315	7.621	5.427	2.873	3.681	120-130	5.287	5217	99.8,99.8
140	5.442	3.908	3.197	4.363	5.868	4.457	3.082	3.334	130-140	3.673	5220	99.9,99.9
150	4.288	4.193	3.241	4.254	4.546	4.182	3.269	3.621	140-150	2.500	5223	99.9,99.9
160	4.568	4.018	3.494	4.292	4.502	4.221	3.395	3.742	150-160	1.828	5225	100,100
170	4.037	3.760	3.620	3.939	4.189	3.860	3.505	3.604	160-170	1.102	5226	100,100
180	3.713	3.667	3.598	3.670	3.708	3.656	3.604	3.665	170-180	0.3538	5226	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.90	.96	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.82
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.63	.72	.67	.62	.69	.65	.61	.59
4.0	.71	.62	.56	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.48	.62	.54	.48	.60	.52	.47	.58	.51	.46	.56	.50	.46	.43
6.0	.57	.48	.42	.56	.48	.41	.54	.46	.41	.52	.45	.40	.50	.45	.40	.38
7.0	.52	.43	.37	.51	.42	.37	.49	.42	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.33	.46	.38	.33	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.35	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

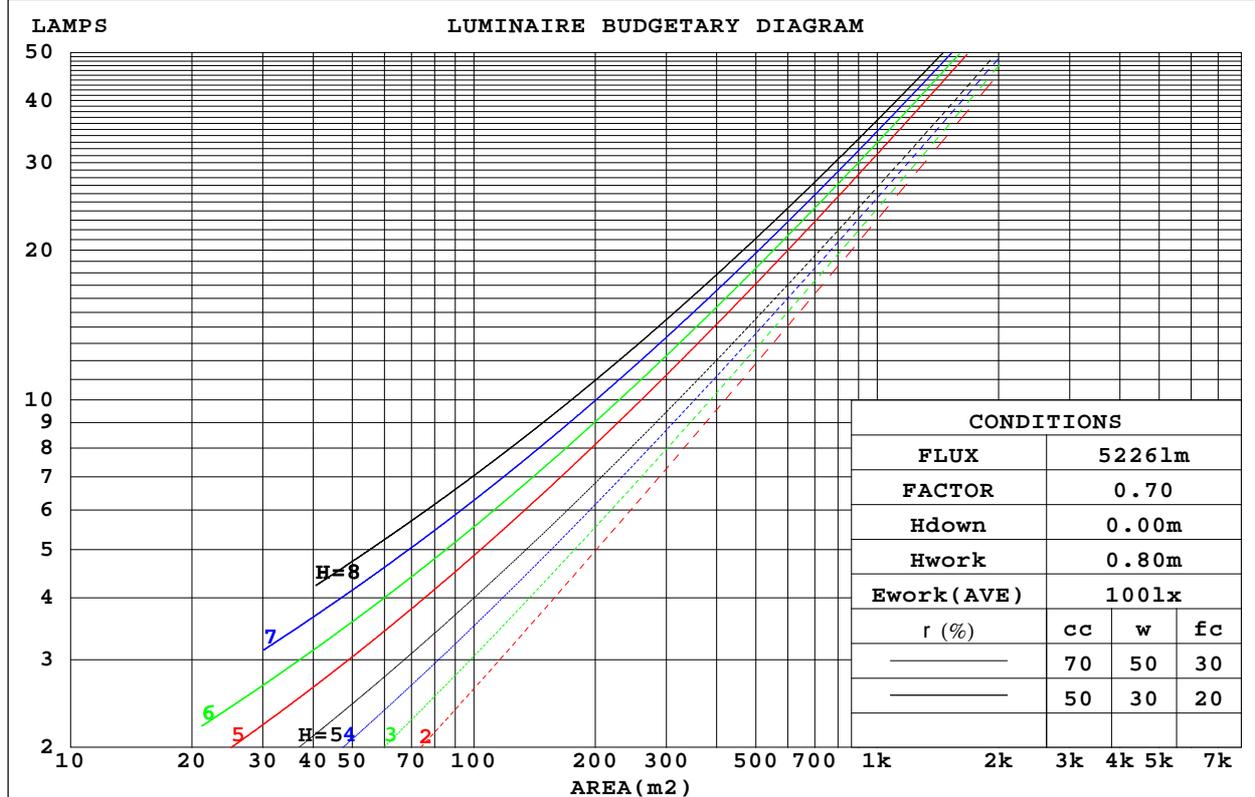

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

WEC AND CCEC

rcc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.304	.173	.055	.296	.169	.054	.282	.162	.052	.269	.155	.050	.257	.149	.048	
2.0	.284	.156	.048	.277	.153	.047	.265	.147	.046	.253	.142	.044	.242	.137	.043	
3.0	.263	.140	.042	.258	.138	.042	.246	.133	.041	.236	.129	.040	.226	.125	.039	
4.0	.244	.127	.037	.239	.125	.037	.229	.121	.036	.220	.118	.036	.211	.115	.035	
5.0	.226	.115	.033	.222	.114	.033	.213	.111	.033	.205	.108	.032	.197	.105	.032	
6.0	.211	.106	.030	.206	.104	.030	.198	.102	.030	.191	.099	.029	.184	.097	.029	
7.0	.197	.097	.028	.193	.096	.027	.186	.094	.027	.179	.092	.027	.173	.090	.026	
8.0	.184	.090	.025	.181	.089	.025	.174	.087	.025	.168	.085	.025	.162	.083	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

rcc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.204	.204	.204	.175	.175	.175	.119	.119	.119	.068	.068	.068	.022	.022	.022	
1.0	.194	.170	.149	.166	.146	.128	.113	.100	.089	.065	.058	.052	.021	.019	.017	
2.0	.185	.146	.113	.159	.126	.098	.109	.087	.068	.063	.051	.040	.020	.016	.013	
3.0	.177	.128	.089	.152	.111	.078	.104	.077	.054	.060	.045	.032	.019	.015	.010	
4.0	.170	.115	.073	.146	.099	.064	.100	.069	.045	.058	.041	.027	.019	.013	.009	
5.0	.163	.105	.062	.140	.091	.054	.096	.063	.038	.056	.037	.023	.018	.012	.007	
6.0	.156	.096	.054	.134	.083	.047	.092	.058	.033	.054	.034	.020	.017	.011	.007	
7.0	.149	.090	.048	.128	.078	.042	.089	.054	.030	.051	.032	.018	.017	.010	.006	
8.0	.143	.084	.043	.123	.073	.038	.085	.051	.027	.049	.030	.016	.016	.010	.005	
9.0	.137	.079	.040	.118	.068	.035	.082	.048	.025	.048	.028	.015	.015	.009	.005	
10.0	.131	.075	.037	.113	.065	.032	.078	.046	.023	.046	.027	.014	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.2	22.7	21.5	22.9	23.1	22.5	24.0	22.8	24.2	24.4
3H	22.1	23.5	22.4	23.7	24.0	23.9	25.2	24.2	25.5	25.8
4H	22.7	24.0	23.1	24.3	24.6	24.2	25.5	24.6	25.8	26.1
6H	23.6	24.8	24.0	25.1	25.5	24.4	25.6	24.8	25.9	26.2
8H	23.9	25.0	24.2	25.4	25.7	24.4	25.6	24.8	25.9	26.2
12H	24.0	25.1	24.3	25.4	25.8	24.4	25.6	24.8	25.9	26.2
4H 2H	21.6	22.9	22.0	23.2	23.5	22.6	23.9	23.0	24.2	24.5
3H	22.7	23.8	23.1	24.2	24.5	24.1	25.2	24.5	25.5	25.9
4H	23.5	24.5	23.9	24.9	25.2	24.5	25.6	24.9	25.9	26.3
6H	24.6	25.5	25.1	25.9	26.3	24.8	25.7	25.3	26.1	26.5
8H	25.0	25.8	25.4	26.2	26.7	24.9	25.8	25.4	26.2	26.6
12H	25.1	25.9	25.6	26.3	26.8	25.0	25.7	25.4	26.2	26.6
8H 4H	23.7	24.5	24.1	24.9	25.3	24.6	25.5	25.1	25.9	26.3
6H	25.1	25.8	25.5	26.2	26.7	25.0	25.7	25.5	26.2	26.6
8H	25.6	26.2	26.1	26.7	27.2	25.2	25.8	25.7	26.3	26.8
12H	25.9	26.4	26.4	26.9	27.4	25.3	25.9	25.8	26.3	26.9
12H 4H	23.7	24.5	24.1	24.9	25.3	24.7	25.4	25.1	25.8	26.3
6H	25.1	25.8	25.6	26.2	26.7	25.1	25.8	25.6	26.2	26.7
8H	25.8	26.3	26.3	26.8	27.3	25.3	25.9	25.9	26.4	26.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.5 / - 0.6				
1.5H	+ 0.3 / - 0.3					+ 1.7 / - 1.5				
2.0H	+ 0.4 / - 0.5					+ 1.1 / - 1.4				

CIE Pub.117 Corrected 5226 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.7)

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:24.6DEG
Operators:
Test Date:2023-05-17

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
Humidity:46.0%
Test Distance:9.960m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	39	55	45	38	32
0.80	68	56	49	66	56	48	65	55	48	41
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	57
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Conical surface Flux(90deg):

2878.3 lm

%lum = 55.1%


%lamp = 55.1%

Conical surface Flux(120deg):

4208.2 lm

%lum = 80.5%


%lamp = 80.5%

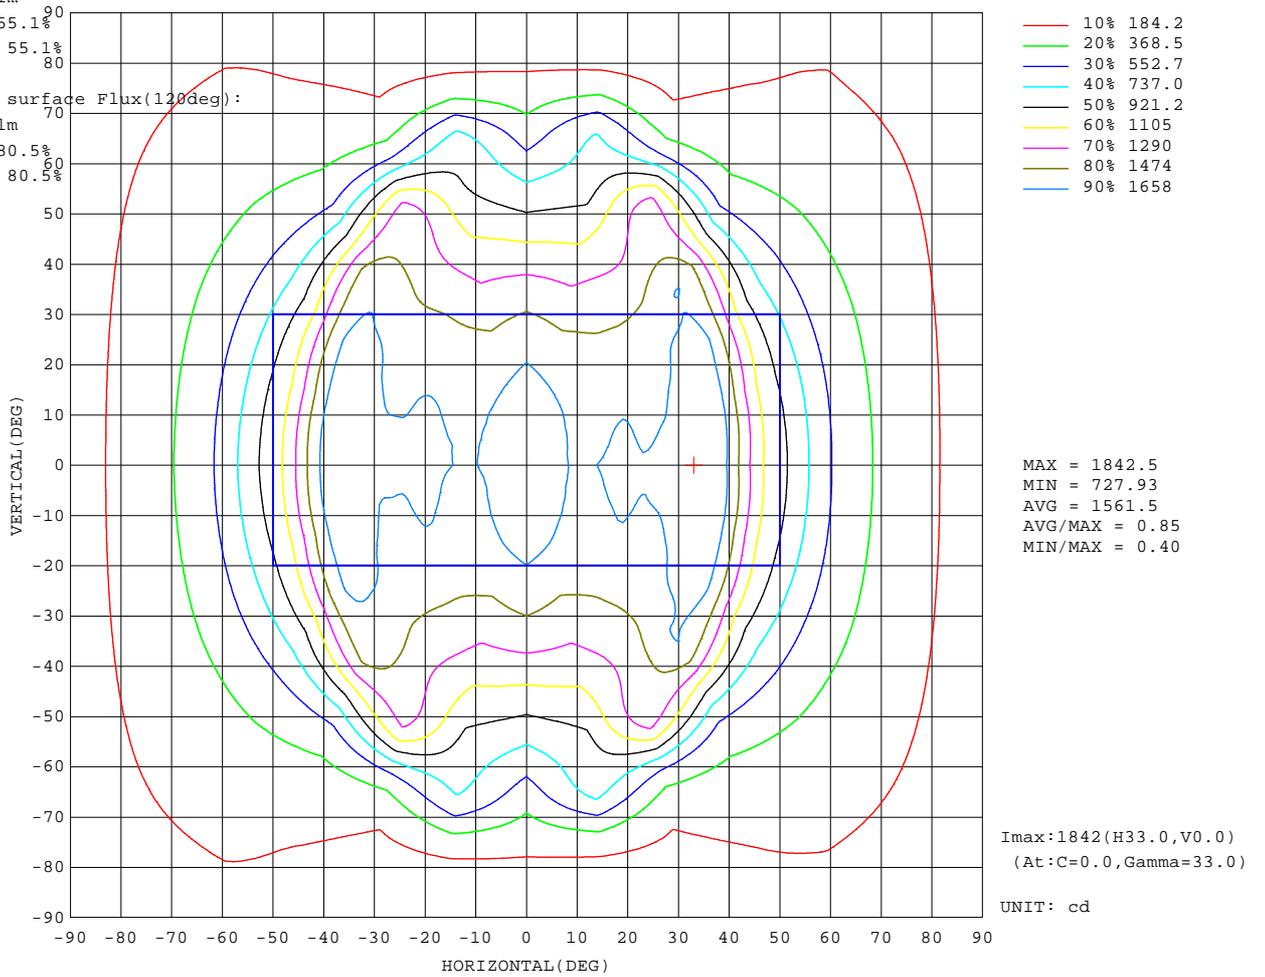

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

AAI Figure

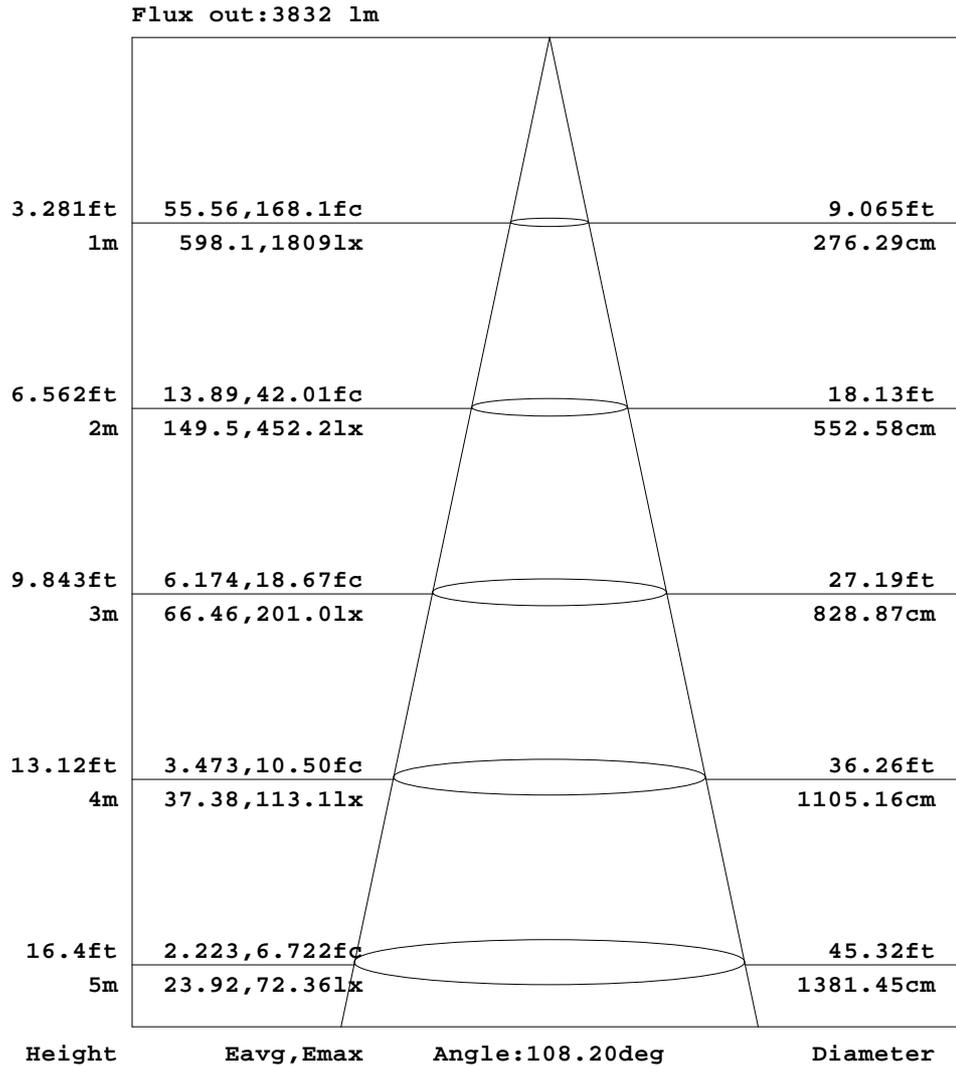


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:


ISOLUX DIAGRAM

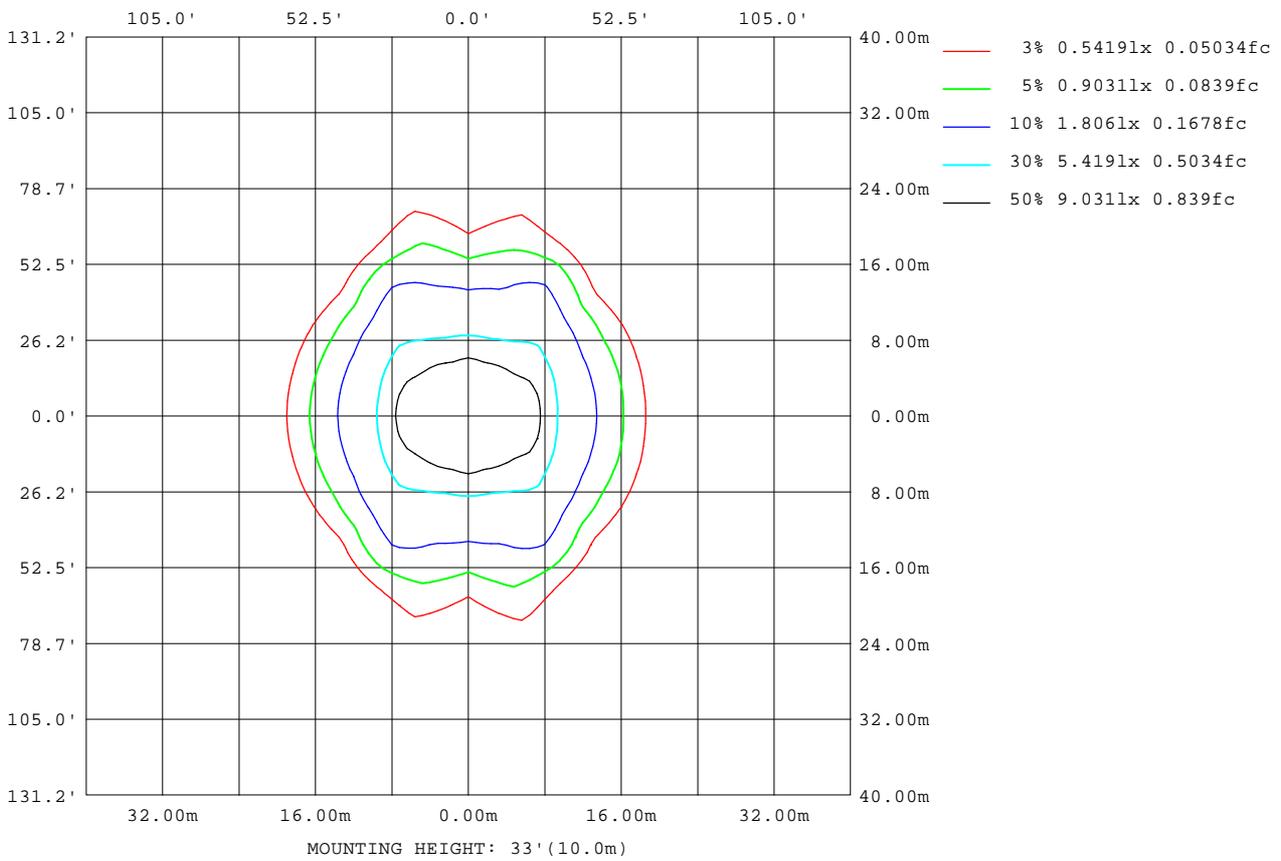

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

Planar Illuminance Curve

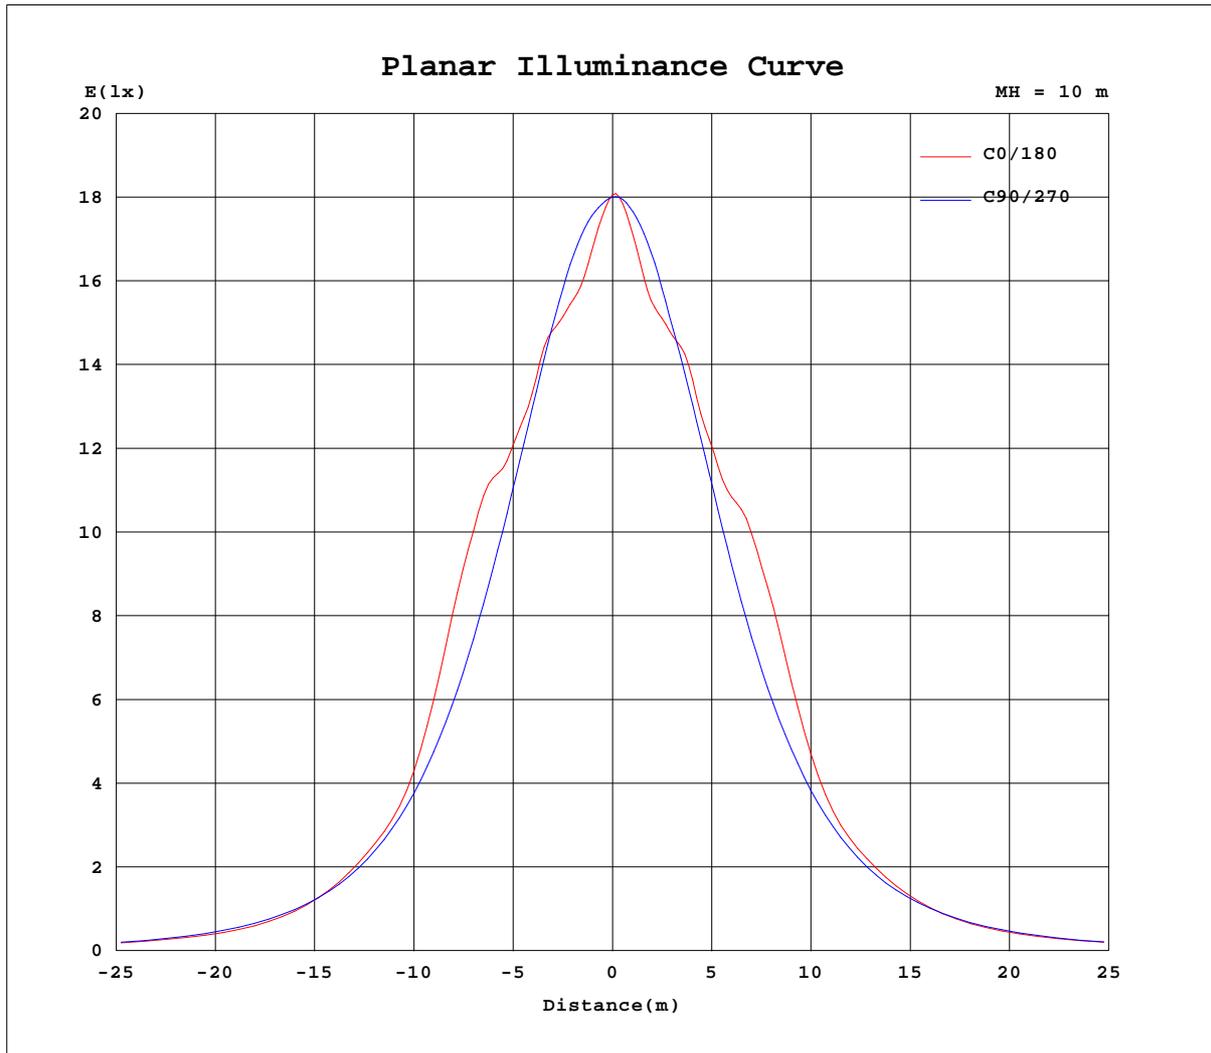

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) g (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1801	1801	1801	1801	1801	1801	1801	1801	1801	1801	1801	1801	1801	1801	1801	1801	1801	1801	1801
5	1716	1719	1727	1743	1763	1781	1787	1779	1765	1752	1743	1743	1752	1749	1754	1762	1776	1789	1797
10	1641	1636	1638	1663	1701	1743	1767	1746	1706	1670	1644	1641	1649	1650	1660	1680	1712	1748	1774
15	1662	1646	1625	1602	1623	1681	1722	1684	1628	1605	1624	1643	1657	1652	1634	1610	1625	1678	1722
20	1694	1690	1651	1595	1556	1598	1657	1604	1555	1598	1651	1697	1714	1703	1659	1602	1557	1602	1664
25	1675	1654	1621	1598	1512	1505	1575	1510	1511	1607	1644	1659	1676	1660	1653	1620	1531	1518	1590
30	1750	1701	1624	1546	1472	1412	1475	1416	1479	1570	1620	1661	1691	1668	1629	1578	1500	1423	1487
35	1822	1815	1727	1537	1426	1317	1356	1319	1437	1532	1674	1785	1812	1790	1694	1550	1459	1327	1365
40	1618	1679	1748	1614	1358	1215	1217	1213	1375	1567	1728	1709	1701	1714	1740	1599	1392	1236	1231
45	1215	1279	1469	1656	1353	1105	1067	1104	1338	1620	1524	1356	1328	1355	1520	1639	1375	1135	1085
50	973	976	1045	1386	1425	993	911	992	1370	1422	1100	1009	1017	1015	1104	1404	1420	1029	929
55	769	768	769	915	1374	901	757	891	1340	968	802	805	824	812	814	948	1355	942	773
60	560	571	568	567	932	865	608	830	978	600	581	602	609	605	593	600	949	899	624
65	426	426	427	390	482	825	471	776	525	396	442	445	455	450	448	406	510	833	485
70	339	341	330	308	267	575	351	580	283	304	333	352	360	356	344	313	279	571	362
75	310	289	261	240	181	296	245	320	181	241	266	284	302	289	269	247	188	299	252
80	250	258	227	183	137	143	142	153	133	182	221	276	290	278	226	187	142	145	149
85	79.4	99.9	150	137	100	67.0	53.9	68.5	97.1	136	171	125	111	126	172	139	103	68.8	58.4
90	45.4	50.3	74.4	106	70.7	30.3	10.4	29.2	67.3	105	81.5	57.6	54.0	57.9	82.5	109	71.9	31.7	11.0
95	42.8	43.4	48.6	65.9	45.3	13.2	8.01	12.3	43.6	69.1	50.3	44.2	43.0	44.4	51.5	71.0	48.2	14.6	8.20
100	55.3	53.4	48.3	40.1	24.9	6.31	6.17	6.60	24.4	40.4	45.8	48.1	48.2	49.2	47.6	42.1	27.6	6.49	5.99
105	45.6	42.8	33.9	22.0	9.72	4.65	4.63	4.99	10.2	23.0	34.5	45.2	50.7	46.0	35.5	22.7	11.2	4.80	4.65
110	19.6	19.3	16.6	11.4	5.86	3.62	3.40	3.85	6.30	12.0	17.7	22.5	25.3	22.6	18.3	11.8	6.39	3.73	3.21
115	12.2	12.4	11.6	8.22	4.70	3.26	2.91	3.55	5.11	8.34	11.5	12.8	13.3	12.7	11.7	8.51	5.28	3.49	2.77
120	9.89	10.2	9.88	6.45	4.01	3.29	2.92	3.57	4.64	6.99	9.56	10.1	10.2	9.83	9.31	7.33	4.80	3.49	2.78
125	8.87	8.87	7.85	5.17	3.71	3.39	2.89	3.53	4.32	6.07	7.94	8.62	8.75	8.26	7.72	6.17	4.39	3.65	2.81
130	7.85	7.63	6.17	4.35	3.83	3.56	3.15	3.63	4.22	5.31	6.94	7.70	7.62	7.22	6.87	5.43	4.20	3.57	2.87
135	7.00	6.53	4.78	3.95	3.94	3.57	3.30	3.67	4.16	4.80	5.90	6.84	6.89	6.41	6.02	4.87	4.13	3.57	2.99
140	5.44	5.00	3.95	3.91	3.90	3.41	3.20	3.60	4.09	4.36	4.98	5.67	5.87	5.30	5.11	4.46	4.09	3.58	3.08
145	4.39	4.10	3.86	4.04	3.91	3.41	3.16	3.55	4.06	4.19	4.41	4.62	4.90	4.32	4.41	4.20	4.07	3.57	3.18
150	4.29	3.94	4.09	4.19	3.86	3.46	3.24	3.57	4.06	4.25	4.25	4.32	4.55	3.99	4.25	4.18	4.08	3.59	3.27
155	4.54	4.10	4.27	4.16	3.82	3.52	3.37	3.61	4.04	4.36	4.33	4.32	4.45	3.95	4.31	4.29	4.01	3.59	3.34
160	4.57	4.06	4.20	4.02	3.81	3.60	3.49	3.67	3.99	4.29	4.50	4.52	4.50	4.13	4.43	4.22	3.89	3.57	3.39
165	4.23	3.73	3.99	3.91	3.75	3.63	3.57	3.67	3.91	4.13	4.36	4.47	4.40	4.05	4.25	4.07	3.79	3.54	3.45
170	4.04	3.52	3.83	3.76	3.69	3.66	3.62	3.67	3.80	3.94	4.10	4.20	4.19	3.75	4.01	3.86	3.68	3.57	3.50
175	3.82	3.38	3.71	3.68	3.66	3.63	3.63	3.62	3.71	3.75	3.79	3.85	3.75	3.56	3.86	3.77	3.68	3.60	3.58
180	3.71	3.41	3.72	3.67	3.66	3.62	3.60	3.61	3.63	3.67	3.69	3.70	3.71	3.41	3.72	3.66	3.66	3.62	3.60

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--2

UNIT: cd

C(DEG) g (DEG)	285	300	315	330	345														
0	1801	1801	1801	1801	1801														
5	1791	1776	1757	1740	1727														
10	1753	1714	1675	1650	1641														
15	1684	1632	1606	1627	1648														
20	1610	1559	1590	1647	1687														
25	1526	1516	1596	1628	1647														
30	1425	1473	1552	1623	1691														
35	1322	1429	1530	1710	1818														
40	1216	1355	1588	1756	1697														
45	1105	1327	1665	1518	1295														
50	985	1380	1447	1085	982														
55	877	1393	966	787	777														
60	811	1039	594	579	577														
65	774	549	392	437	428														
70	602	286	307	333	343														
75	331	182	243	261	286														
80	158	134	183	220	274														
85	69.0	98.3	136	169	102														
90	28.5	68.0	107	78.4	50.5														
95	11.7	44.5	69.4	47.9	42.8														
100	5.90	24.5	40.6	47.4	52.7														
105	4.63	9.59	21.3	34.5	43.3														
110	3.32	5.51	10.6	16.6	19.3														
115	2.92	4.30	7.68	11.3	12.2														
120	2.87	3.57	5.97	9.60	9.99														
125	2.89	3.28	4.62	7.50	8.65														
130	2.93	3.23	3.68	5.54	7.53														
135	3.06	3.24	3.41	4.28	6.18														
140	3.13	3.29	3.33	3.58	4.84														
145	3.23	3.44	3.44	3.71	4.13														
150	3.29	3.54	3.62	3.82	4.02														
155	3.34	3.56	3.74	3.87	4.08														
160	3.40	3.55	3.74	3.83	3.96														
165	3.42	3.53	3.68	3.76	3.85														
170	3.50	3.53	3.60	3.67	3.73														
175	3.58	3.60	3.61	3.65	3.64														
180	3.60	3.62	3.66	3.68	3.70														

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2023-05-17

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks: