
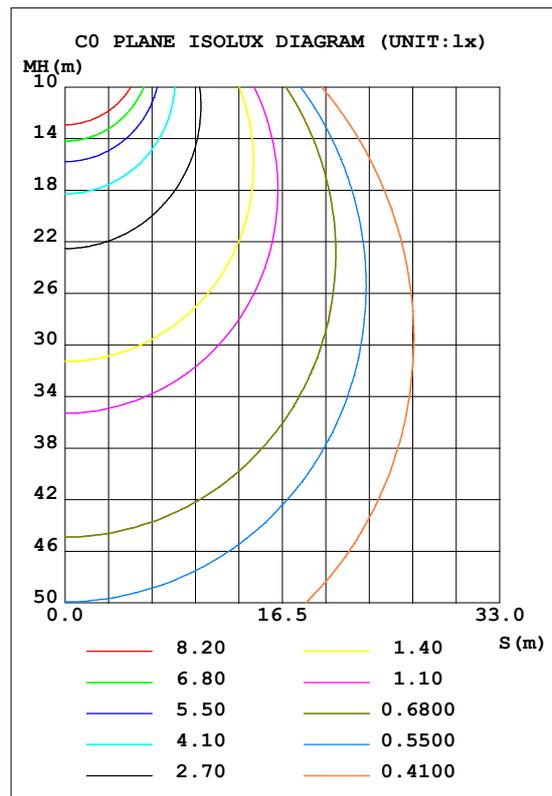


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:227.9V I:0.1580A P:34.60W PF:0.9560 Lamp Flux:4496.8x1 lm		
NAME: TP-12-35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1.167*0.07	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 129.97 lm/W			
MODEL	TP-12-35W	I _{max} (cd)	1370	S/MH (C0/180)	1.20
NOMINAL POWER (W)	36	LOR (%)	100.0	S/MH (C90/270)	1.31
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	4496.8	η UP, DN (C0-180)	3.0, 46.3
NOMINAL FLUX (lm)	4496.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	3.4, 47.3
LAMPS INSIDE	1	η up (%)	6.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	229.3	η down (%)	93.6	CIBSE SHR MAX	1.35

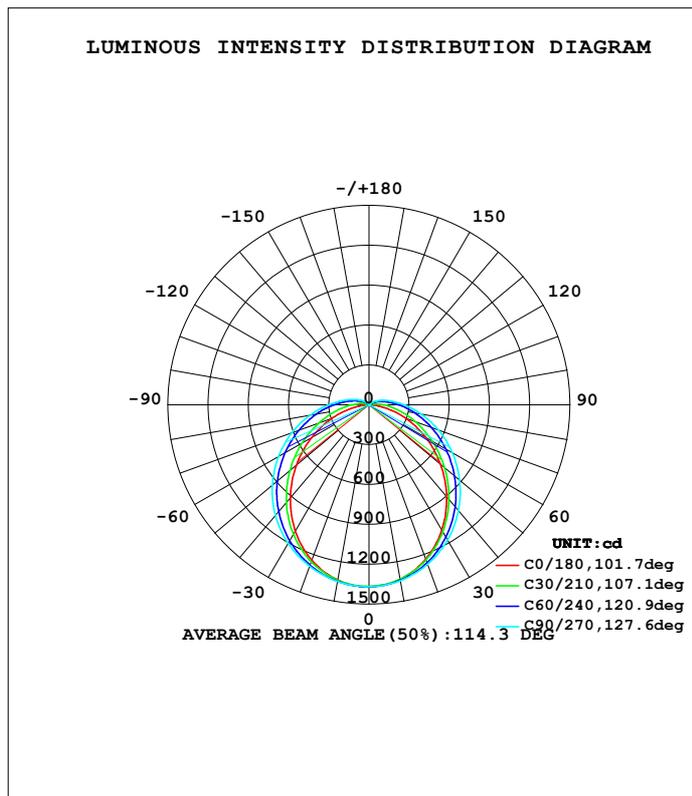

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: 华登
 Test Date: 2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 62.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1334	1339	1345	1354	1339	1345	1350	1328	0- 10	129.3	129.3	2.88,2.88
20	1237	1255	1278	1286	1246	1270	1294	1241	10- 20	369.0	498.3	11.1,11.1
30	1087	1128	1175	1171	1099	1155	1205	1113	20- 30	556.1	1054	23.4,23.4
40	901.8	966.2	1040	1019	913.1	1004	1086	954.9	30- 40	667.2	1722	38.3,38.3
50	697.3	786.5	883.6	842.5	706.9	832.3	942.3	777.0	40- 50	693.3	2415	53.7,53.7
60	488.0	604.6	717.2	659.4	495.1	652.6	779.4	596.6	50- 60	640.7	3056	68,68
70	284.9	435.1	550.6	484.3	287.0	480.0	610.5	426.7	60- 70	528.6	3584	79.7,79.7
80	101.9	287.7	392.6	329.6	102.5	327.5	445.7	280.9	70- 80	384.0	3968	88.2,88.2
90	0.9411	174.4	262.3	205.3	0.4407	204.3	300.4	168.3	80- 90	242.6	4211	93.6,93.6
100	0.5535	96.28	166.4	117.7	0.5483	116.7	193.2	91.88	90-100	141.0	4352	96.8,96.8
110	0.8008	48.23	99.73	60.58	0.7905	58.47	119.1	46.12	100-110	77.37	4429	98.5,98.5
120	1.096	21.13	55.06	27.01	1.075	28.38	67.78	20.77	110-120	39.16	4468	99.4,99.4
130	1.397	7.649	26.29	9.889	1.387	11.26	34.31	8.060	120-130	17.58	4486	99.8,99.8
140	1.682	2.627	9.742	2.966	1.634	4.234	15.71	2.786	130-140	6.735	4493	99.9,99.9
150	1.956	2.031	2.927	1.980	1.871	2.139	5.269	1.936	140-150	2.305	4495	100,100
160	2.188	2.213	2.244	2.174	2.091	2.122	2.207	2.109	150-160	1.029	4496	100,100
170	2.306	2.353	2.379	2.298	2.274	2.288	2.336	2.271	160-170	0.6274	4497	100,100
180	2.365	2.391	2.433	2.357	2.376	2.401	2.433	2.374	170-180	0.2226	4497	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.7DEG
 Operators: 华登
 Test Date:2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:62.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.96	.96	.96	.94
1.0	1.00	.95	.91	.97	.93	.89	.92	.88	.85	.87	.84	.81	.82	.80	.77	.75
2.0	.86	.79	.73	.84	.77	.71	.79	.74	.69	.75	.70	.66	.71	.67	.64	.61
3.0	.75	.67	.60	.73	.65	.59	.69	.63	.57	.66	.60	.55	.62	.58	.53	.51
4.0	.67	.57	.50	.65	.56	.50	.61	.54	.48	.58	.52	.47	.55	.50	.46	.43
5.0	.59	.50	.43	.58	.49	.43	.55	.47	.42	.52	.46	.41	.50	.44	.40	.37
6.0	.53	.44	.38	.52	.43	.37	.50	.42	.36	.47	.41	.35	.45	.39	.35	.32
7.0	.48	.39	.33	.47	.39	.33	.45	.38	.32	.43	.36	.31	.41	.35	.31	.29
8.0	.44	.35	.29	.43	.35	.29	.41	.34	.29	.39	.33	.28	.38	.32	.28	.25
9.0	.40	.32	.26	.40	.32	.26	.38	.31	.26	.36	.30	.25	.35	.29	.25	.23
10.0	.37	.29	.24	.37	.29	.24	.35	.28	.23	.34	.27	.23	.32	.27	.23	.21

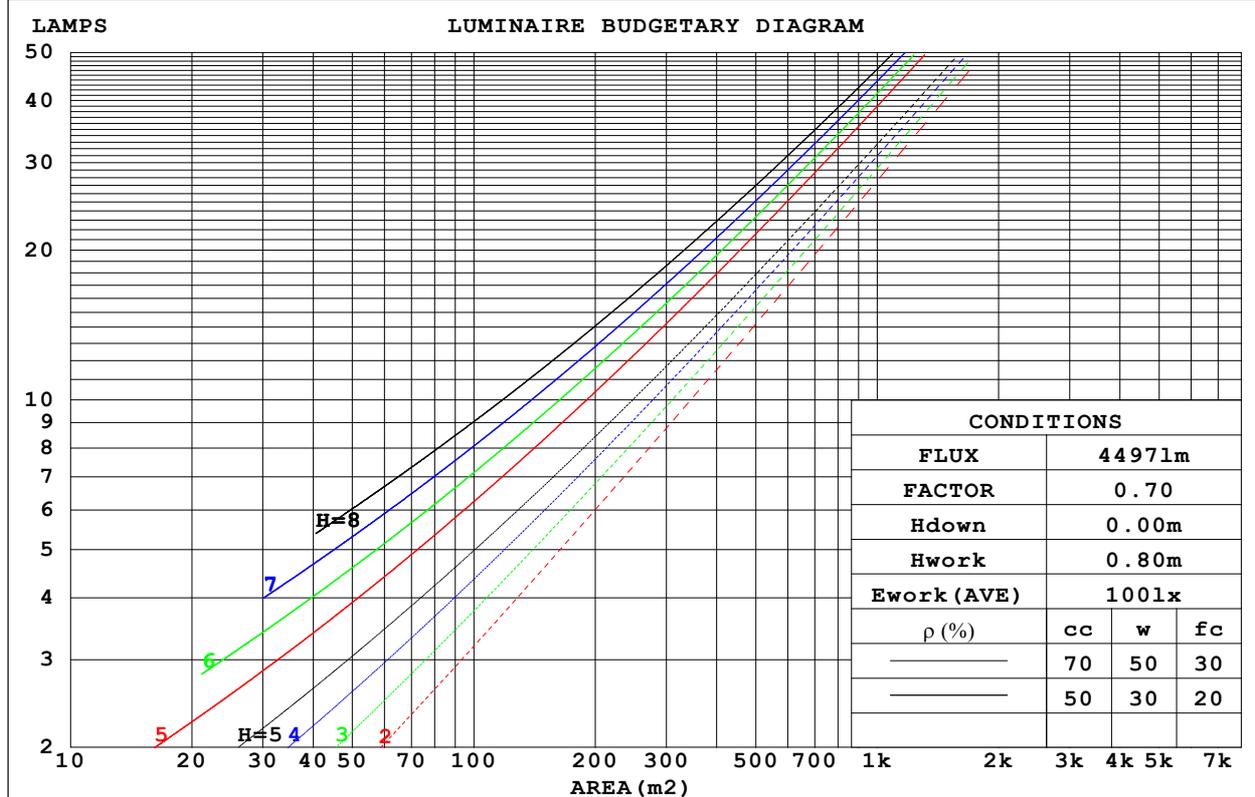

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: 华登
 Test Date: 2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 62.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.354	.202	.064	.345	.197	.063	.328	.188	.060	.312	.180	.058	.298	.173	.056	
2.0	.316	.173	.053	.308	.170	.052	.293	.163	.051	.278	.156	.049	.265	.150	.047	
3.0	.285	.152	.045	.278	.149	.045	.264	.143	.044	.252	.138	.042	.240	.133	.041	
4.0	.259	.135	.040	.253	.132	.039	.240	.128	.038	.229	.123	.037	.219	.119	.036	
5.0	.237	.121	.035	.231	.119	.035	.220	.115	.034	.210	.111	.033	.201	.107	.032	
6.0	.218	.110	.031	.213	.108	.031	.203	.104	.030	.194	.101	.030	.185	.098	.029	
7.0	.202	.100	.028	.198	.098	.028	.189	.095	.027	.180	.092	.027	.172	.090	.026	
8.0	.188	.092	.026	.184	.091	.026	.176	.088	.025	.168	.085	.025	.161	.083	.024	
9.0	.176	.085	.024	.172	.084	.024	.165	.081	.023	.158	.079	.023	.151	.077	.022	
10.0	.165	.079	.022	.161	.078	.022	.155	.076	.021	.148	.074	.021	.142	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.239	.239	.239	.204	.204	.204	.139	.139	.139	.080	.080	.080	.026	.026	.026	
1.0	.232	.205	.180	.199	.176	.155	.136	.121	.107	.078	.070	.062	.025	.023	.020	
2.0	.225	.181	.144	.192	.156	.125	.132	.108	.087	.076	.063	.051	.024	.020	.017	
3.0	.217	.164	.122	.186	.141	.105	.128	.098	.074	.074	.057	.044	.024	.019	.014	
4.0	.209	.151	.107	.179	.130	.093	.123	.091	.065	.071	.053	.039	.023	.017	.013	
5.0	.201	.141	.096	.173	.122	.084	.119	.085	.059	.069	.050	.035	.022	.016	.012	
6.0	.194	.132	.088	.167	.115	.077	.115	.080	.054	.067	.047	.032	.022	.015	.011	
7.0	.187	.126	.083	.161	.109	.072	.111	.076	.051	.065	.045	.030	.021	.015	.010	
8.0	.180	.120	.079	.155	.104	.069	.107	.073	.049	.062	.043	.029	.020	.014	.010	
9.0	.174	.115	.075	.150	.100	.066	.104	.070	.047	.060	.041	.028	.020	.014	.009	
10.0	.168	.111	.073	.145	.096	.063	.101	.068	.045	.059	.040	.027	.019	.013	.009	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.7DEG
 Operators: 华登
 Test Date:2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:62.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.8	22.3	21.1	22.6	22.9	22.4	23.9	22.8	24.2	24.5
3H	22.1	23.4	22.5	23.8	24.2	24.6	25.9	25.0	26.3	26.7
4H	22.6	23.9	23.0	24.2	24.6	25.7	27.0	26.1	27.4	27.8
6H	22.9	24.1	23.3	24.5	24.9	26.9	28.1	27.3	28.5	28.9
8H	23.0	24.2	23.4	24.6	25.0	27.5	28.7	28.0	29.1	29.5
12H	23.0	24.1	23.4	24.5	25.0	28.2	29.4	28.7	29.8	30.2
4H 2H	21.7	23.0	22.1	23.3	23.7	22.9	24.2	23.3	24.6	25.0
3H	23.2	24.4	23.7	24.8	25.2	25.3	26.5	25.8	26.9	27.3
4H	23.9	24.9	24.3	25.3	25.8	26.6	27.7	27.1	28.1	28.6
6H	24.3	25.3	24.8	25.7	26.2	28.0	29.0	28.5	29.5	30.0
8H	24.5	25.3	25.0	25.8	26.4	28.8	29.7	29.3	30.2	30.7
12H	24.5	25.4	25.1	25.9	26.4	29.7	30.5	30.2	31.0	31.5
8H 4H	24.6	25.5	25.1	26.0	26.5	26.9	27.8	27.4	28.3	28.8
6H	25.4	26.1	25.9	26.6	27.2	28.6	29.3	29.1	29.9	30.4
8H	25.7	26.3	26.2	26.9	27.5	29.6	30.2	30.1	30.8	31.4
12H	25.9	26.5	26.5	27.0	27.6	30.7	31.3	31.3	31.8	32.4
12H 4H	24.8	25.6	25.3	26.1	26.7	26.9	27.7	27.5	28.2	28.8
6H	25.8	26.4	26.3	27.0	27.6	28.7	29.4	29.3	29.9	30.5
8H	26.2	26.8	26.8	27.3	28.0	29.8	30.3	30.3	30.9	31.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 4497 lm Total Lamp Luminous Flux. (8log(F/F0) = 5.2)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: 华登
 Test Date: 2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 62.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	54	42	35	53	41	34	51	41	34	28
0.80	63	51	43	62	50	43	60	50	43	35
1.00	71	59	51	70	59	51	67	60	50	43
1.25	78	67	59	76	66	58	73	64	57	49
1.50	83	72	64	81	71	64	78	69	62	54
2.00	90	80	73	88	79	72	84	76	70	61
2.50	94	85	78	92	83	77	87	80	75	65
3.00	98	90	83	95	88	82	90	84	79	69
4.00	102	95	89	99	93	88	94	89	84	74
5.00	105	99	94	102	96	92	96	92	88	77
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: 华登
 Test Date: 2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 62.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Conical surface Flux(90deg):


2070.2 lm

%lum = 46.0%
%lamp = 46.0%

Conical surface Flux(120deg):

3055.6 lm


%lum = 68.0%
%lamp = 68.0%

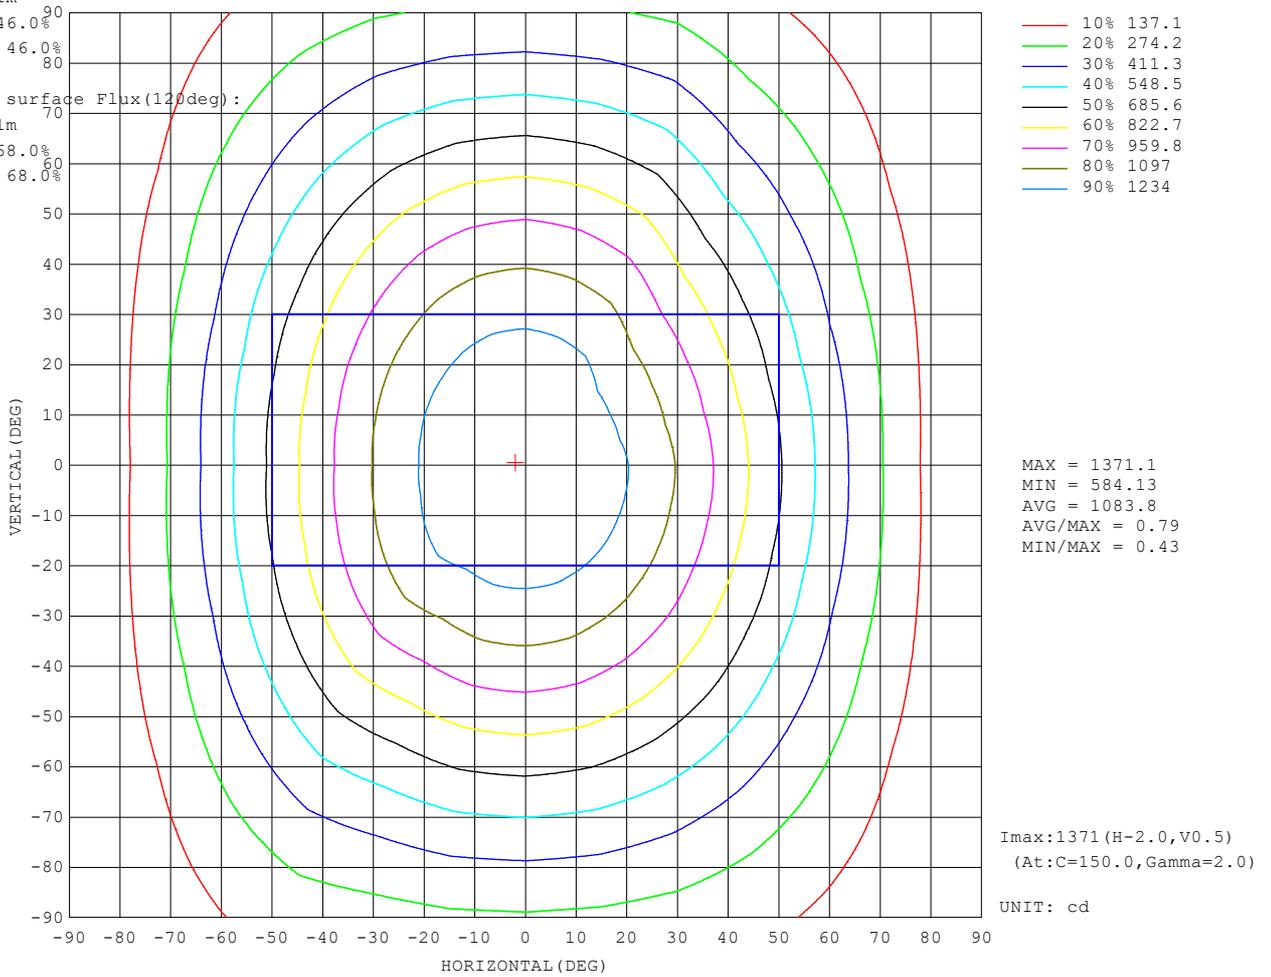

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.7DEG
Operators: 华登
Test Date:2020-08-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
Humidity:62.0%
Test Distance:9.960m [K=1.0000]
Remarks:

AAI Figure

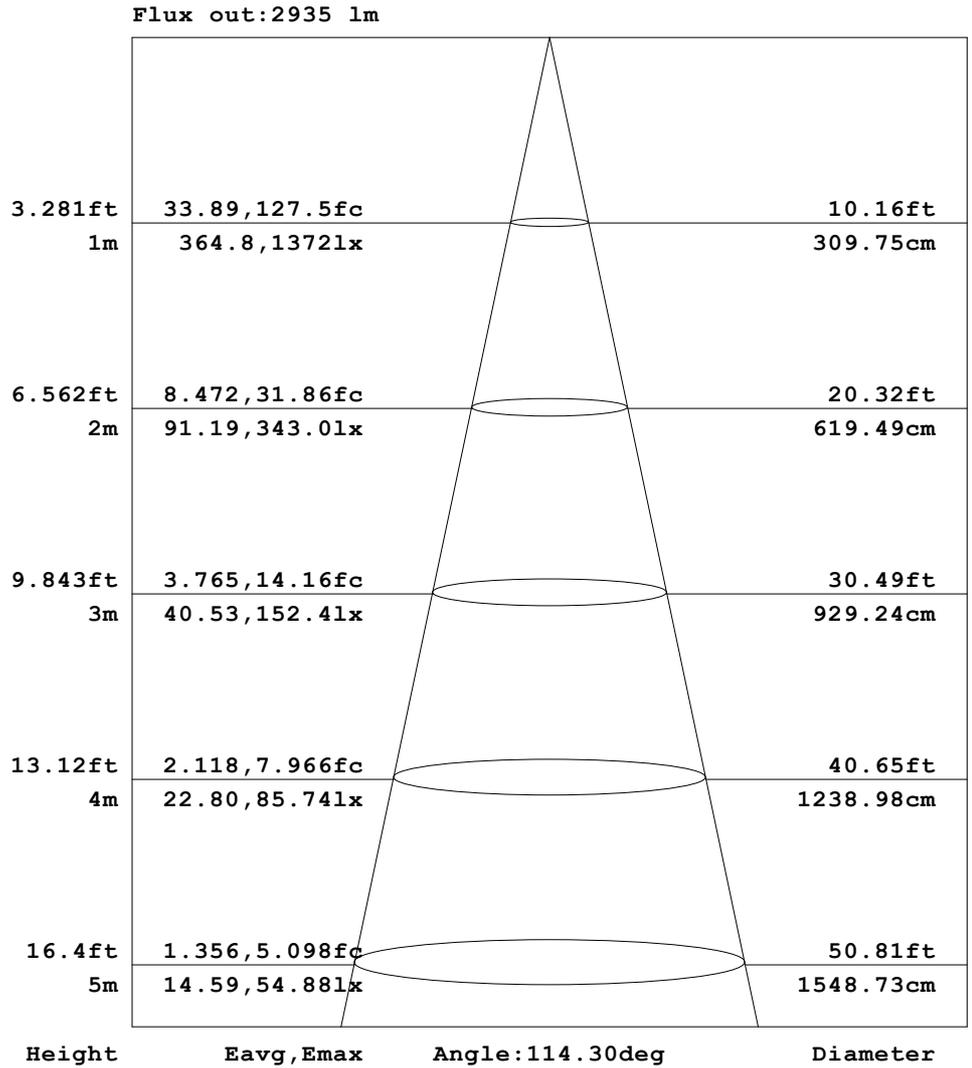


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: 华登
 Test Date: 2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 62.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:


ISOLUX DIAGRAM

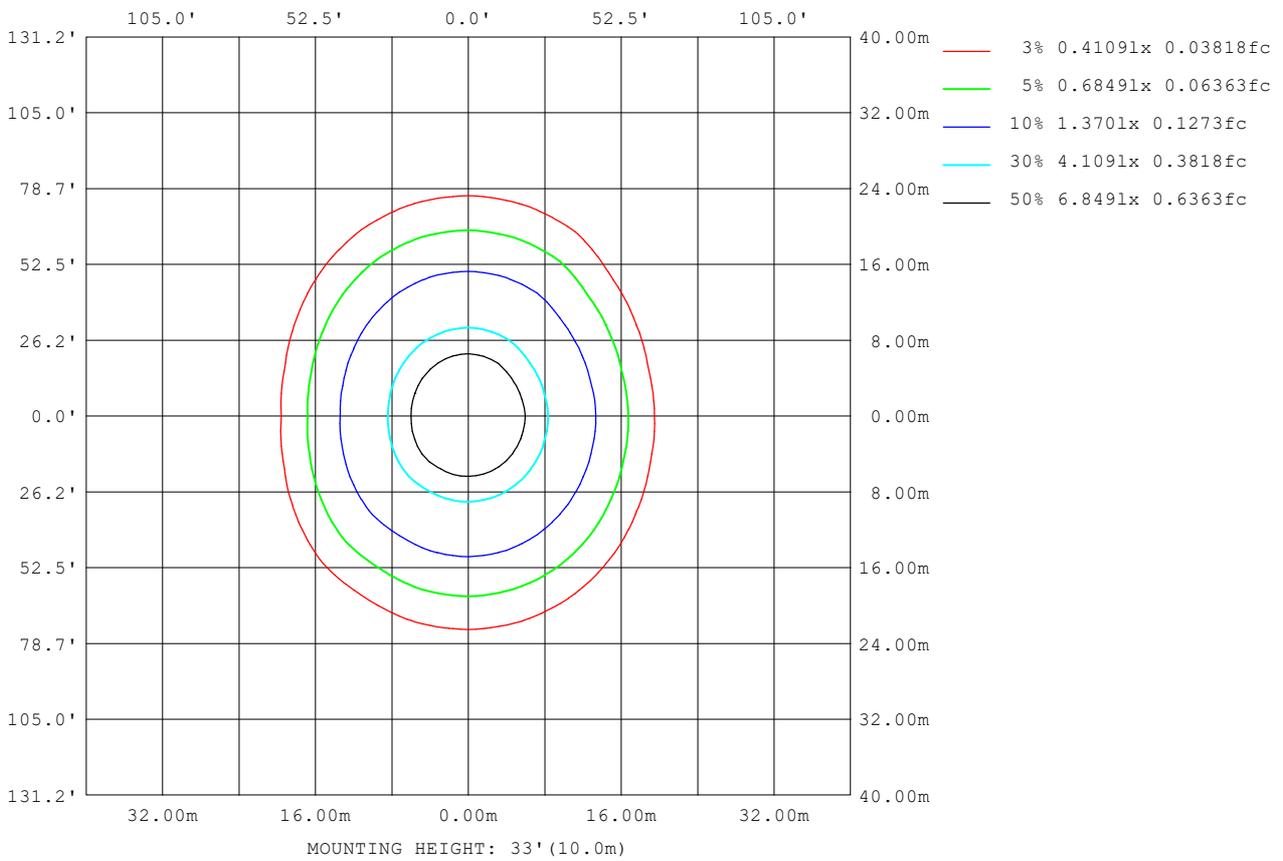

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: 华登
 Test Date: 2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 62.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

Planar Illuminance Curve

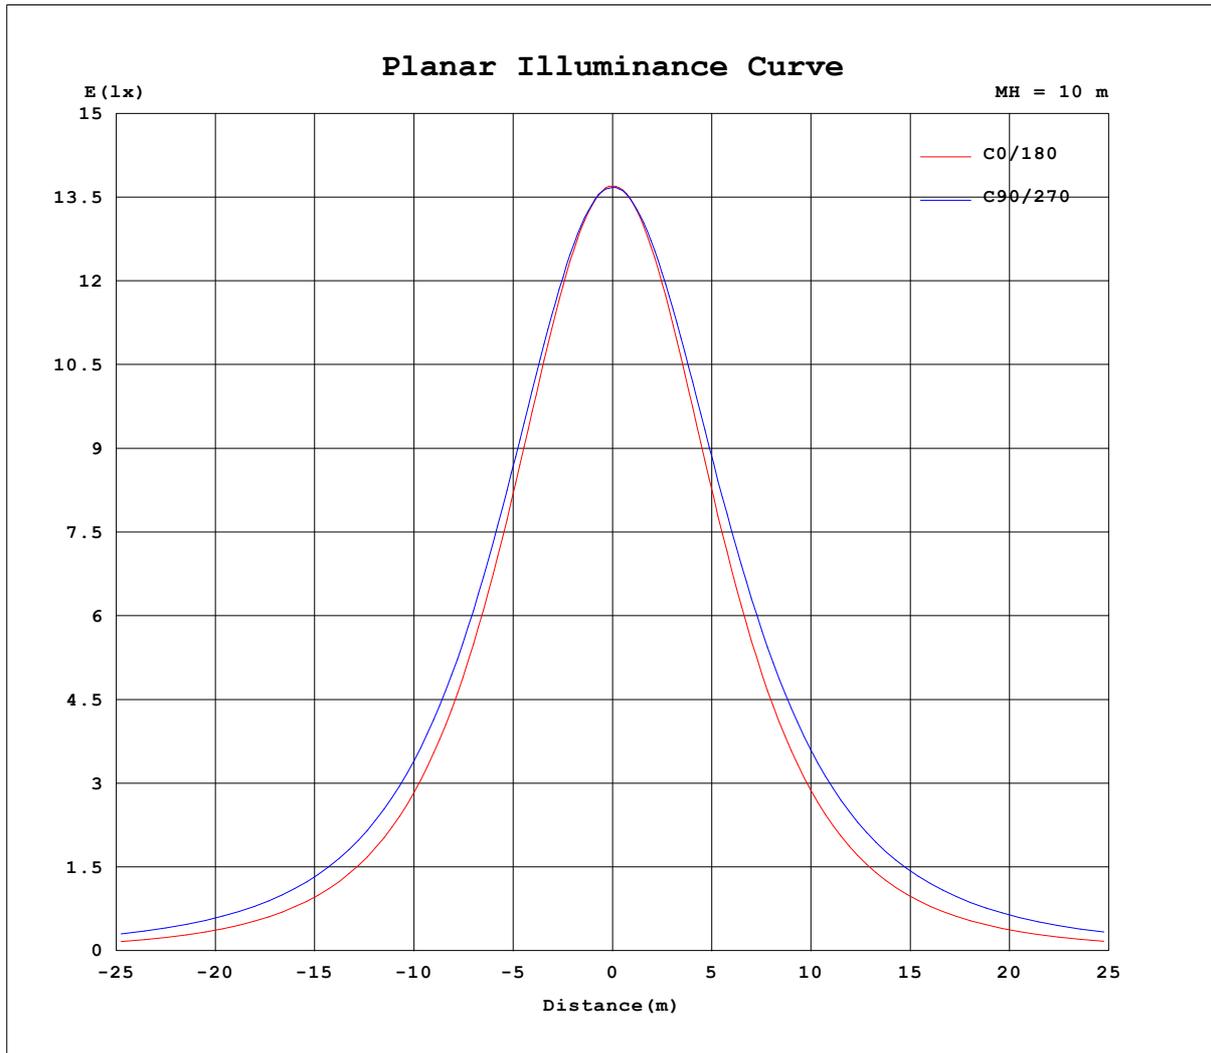

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: 华登
 Test Date: 2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 62.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1368	1368	1368	1368	1368	1368	1368	1368	1368	1368	1368	1368	1368	1368	1368	1368	1368	1368	1368
5	1359	1360	1357	1359	1362	1361	1362	1362	1361	1367	1367	1362	1364	1362	1360	1363	1364	1363	1364
10	1334	1335	1333	1339	1340	1342	1345	1345	1343	1354	1352	1342	1339	1340	1341	1345	1349	1349	1350
15	1293	1292	1293	1300	1308	1312	1316	1317	1312	1326	1320	1307	1300	1302	1307	1313	1322	1325	1326
20	1237	1240	1244	1255	1265	1274	1278	1278	1271	1286	1274	1257	1246	1251	1259	1270	1285	1291	1294
25	1169	1170	1178	1196	1211	1224	1230	1230	1218	1234	1215	1192	1177	1185	1197	1216	1237	1249	1253
30	1087	1090	1103	1128	1149	1166	1175	1171	1157	1171	1147	1116	1099	1108	1127	1155	1182	1199	1205
35	999	1003	1017	1048	1078	1101	1110	1107	1086	1099	1065	1032	1010	1020	1049	1082	1119	1141	1149
40	902	907	929	966	1001	1027	1040	1034	1010	1019	978	938	913	927	959	1004	1049	1078	1086
45	802	809	833	877	919	950	963	958	928	932	886	840	813	826	867	921	974	1006	1018
50	697	704	736	787	833	869	884	876	844	842	788	736	707	725	770	832	893	930	942
55	592	603	639	696	747	784	801	792	758	751	690	632	601	621	673	743	809	849	862
60	488	501	544	605	661	701	717	708	671	659	593	529	495	518	578	653	723	766	779
65	385	402	451	518	577	618	634	624	586	570	497	427	391	418	483	565	638	682	695
70	285	306	365	435	494	535	551	542	503	484	407	329	287	320	395	480	555	598	611
75	190	219	286	358	417	455	469	461	425	404	323	237	190	230	312	401	474	515	527
80	102	143	216	288	345	380	393	385	352	330	249	157	102	151	239	327	397	435	446
85	33.0	83.4	157	227	280	310	323	315	286	263	185	92.6	32.3	89.1	178	262	325	360	370
90	0.94	42.9	110	174	223	251	262	255	229	205	133	48.8	0.44	47.2	128	204	261	293	300
95	0.46	20.1	74.5	131	175	200	210	203	179	157	92.5	24.0	0.47	23.6	89.1	156	207	235	242
100	0.55	8.96	48.7	96.3	134	158	166	160	138	118	62.6	11.7	0.55	11.8	60.1	117	162	187	193
105	0.68	3.92	30.8	69.1	101	122	130	124	104	85.0	41.5	5.86	0.65	6.13	40.1	82.5	123	146	153
110	0.80	1.85	18.8	48.2	75.2	93.2	99.7	94.9	77.4	60.6	26.7	3.01	0.79	3.32	26.0	58.5	87.9	112	119
115	0.95	1.20	10.9	32.6	54.3	69.5	75.1	70.8	55.5	41.9	16.3	1.66	0.92	1.86	16.1	42.9	66.7	85.0	91.6
120	1.10	1.16	6.17	21.1	38.0	50.4	55.1	51.4	38.6	27.0	9.63	1.26	1.08	1.35	9.73	28.4	48.4	60.6	67.8
125	1.25	1.29	3.45	13.1	25.5	35.2	39.0	36.0	26.1	16.6	5.55	1.24	1.23	1.30	5.85	17.7	35.6	45.5	48.0
130	1.40	1.44	2.16	7.65	16.2	23.4	26.3	24.0	15.3	9.89	3.29	1.37	1.39	1.40	3.62	11.3	22.8	32.4	34.3
135	1.55	1.57	1.74	4.33	9.63	14.6	16.7	15.1	8.85	5.60	2.21	1.50	1.53	1.52	2.44	6.90	14.1	22.3	23.8
140	1.68	1.71	1.77	2.63	5.34	8.41	9.74	8.74	4.82	2.97	1.82	1.65	1.63	1.64	1.89	4.23	8.50	14.3	15.7
145	1.83	1.85	1.89	2.02	3.02	4.52	5.26	4.60	2.84	2.15	1.80	1.79	1.76	1.77	1.80	2.77	4.98	8.11	9.47
150	1.96	1.99	2.01	2.03	2.18	2.66	2.93	2.61	2.12	1.98	1.93	1.92	1.87	1.87	1.90	2.14	3.04	4.29	5.27
155	2.09	2.08	2.11	2.13	2.15	2.17	2.22	2.13	2.10	2.09	2.03	2.03	1.99	1.99	2.00	2.04	2.24	2.62	2.97
160	2.19	2.18	2.21	2.21	2.24	2.22	2.24	2.13	2.19	2.17	2.12	2.15	2.09	2.09	2.10	2.12	2.15	2.16	2.21
165	2.25	2.26	2.28	2.28	2.27	2.28	2.31	2.19	2.26	2.25	2.22	2.23	2.18	2.18	2.19	2.20	2.22	2.23	2.23
170	2.31	2.32	2.34	2.35	2.36	2.35	2.38	2.24	2.32	2.30	2.29	2.29	2.27	2.27	2.28	2.29	2.31	2.32	2.34
175	2.35	2.36	2.36	2.37	2.38	2.38	2.41	2.25	2.34	2.34	2.31	2.32	2.27	2.27	2.28	2.29	2.31	2.32	2.34
180	2.36	2.37	2.38	2.39	2.40	2.40	2.43	2.29	2.36	2.36	2.35	2.36	2.38	2.38	2.38	2.40	2.41	2.39	2.43

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: 华登
 Test Date: 2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 62.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--2

UNIT: cd

C (DEG) γ (DEG)	285	300	315	330	345														
0	1368	1368	1368	1368	1368														
5	1363	1361	1355	1354	1355														
10	1347	1344	1328	1328	1327														
15	1322	1315	1291	1287	1286														
20	1287	1276	1241	1232	1229														
25	1245	1228	1181	1167	1159														
30	1194	1173	1113	1091	1080														
35	1136	1108	1037	1006	988														
40	1071	1038	955	916	896														
45	1000	960	866	821	795														
50	923	879	777	725	692														
55	842	795	686	628	591														
60	758	710	597	533	489														
65	674	625	509	441	389														
70	590	541	427	355	296														
75	507	462	350	275	209														
80	428	386	281	206	134														
85	353	314	220	149	75.9														
90	288	253	168	104	37.7														
95	231	200	126	69.3	17.1														
100	183	156	91.9	44.9	7.49														
105	143	120	65.8	28.3	3.33														
110	111	90.5	46.1	17.3	1.65														
115	84.5	67.3	31.5	10.3	1.13														
120	63.2	48.9	20.8	6.00	1.14														
125	46.0	34.6	13.2	3.49	1.28														
130	32.3	23.6	8.06	2.20	1.44														
135	20.9	15.4	4.71	1.70	1.55														
140	12.6	9.47	2.79	1.71	1.68														
145	7.88	5.38	1.99	1.82	1.79														
150	4.36	3.08	1.94	1.91	1.89														
155	2.51	2.17	2.03	2.02	2.00														
160	2.00	2.07	2.11	2.10	2.09														
165	2.07	2.15	2.18	2.19	2.19														
170	2.17	2.24	2.27	2.26	2.27														
175	2.28	2.35	2.36	2.35	2.35														
180	2.30	2.35	2.37	2.36	2.36														

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: 华登
 Test Date: 2020-08-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 62.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks: