
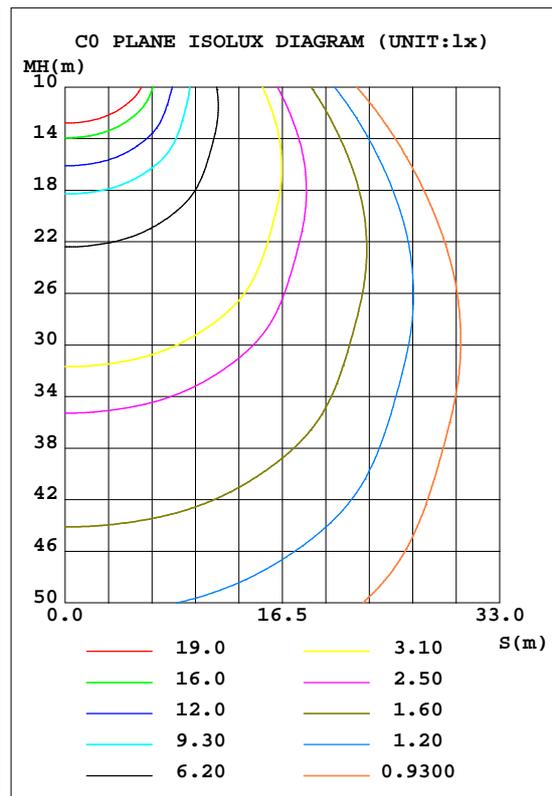


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.7V I:0.2290A P:52.00W PF:0.9880 Lamp Flux:9794.6x1 lm		
NAME: VWP-LC001-1500	TYPE:	WEIGHT:
SPEC.:	DIM.: 1.5*0.09*0.06	SERIAL No.:
MFR.:	SUR.:1.5*0.09	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 188.36 lm/W			
MODEL	VWP-LC001-1500	I _{max} (cd)	3121	S/MH(C0/180)	1.32
NOMINAL POWER(W)	50	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	9794.6	h UP, DN(C0-180)	1.6, 48.9
NOMINAL FLUX(lm)	9794.6	CIE CLASS	DIRECT	h UP, DN(C180-360)	1.5, 48.0
LAMPS INSIDE	1	h up(%)	3.1	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	229.9	h down(%)	96.9	CIBSE SHR MAX	1.50

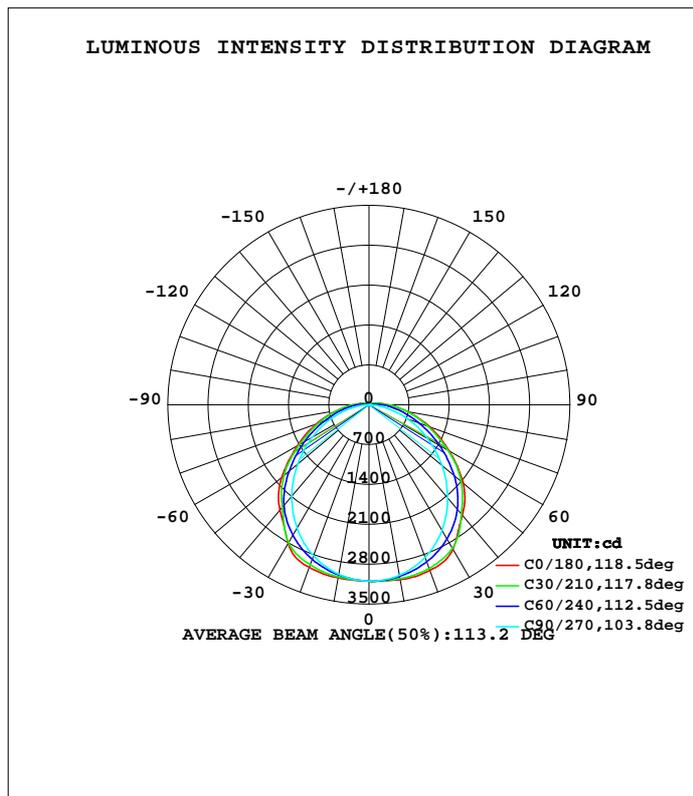

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	3116	3080	3039	3064	3087	3052	3023	3067	0- 10	294.0	294.0	3,3
20	3096	3007	2854	2967	3039	2944	2822	2982	10- 20	855.2	1149	11.7,11.7
30	2927	2833	2545	2775	2813	2743	2505	2800	20- 30	1324	2474	25.3,25.3
40	2531	2500	2133	2383	2413	2343	2092	2469	30- 40	1602	4075	41.6,41.6
50	2143	2016	1660	1903	1985	1864	1622	1983	40- 50	1655	5730	58.5,58.5
60	1606	1525	1177	1397	1441	1363	1146	1499	50- 60	1485	7215	73.7,73.7
70	1122	1019	709.6	904.5	969.9	879.1	689.7	999.0	60- 70	1144	8359	85.3,85.3
80	673.6	615.8	278.5	527.9	553.2	512.6	270.0	602.1	70- 80	746.2	9106	93,93
90	337.7	317.5	26.17	259.9	270.8	255.1	24.59	310.4	80- 90	389.9	9496	96.9,96.9
100	174.9	140.6	16.73	110.8	143.6	109.5	15.35	135.4	90-100	172.6	9668	98.7,98.7
110	93.20	49.45	10.85	35.21	76.55	35.54	9.801	46.37	100-110	73.13	9741	99.5,99.5
120	40.76	11.23	7.045	10.38	30.63	10.10	6.414	10.77	110-120	28.20	9770	99.7,99.7
130	14.52	8.012	4.988	7.759	12.04	7.723	4.704	7.605	120-130	10.14	9780	99.8,99.8
140	9.768	6.472	4.590	6.538	8.608	6.571	4.574	6.319	130-140	5.763	9785	99.9,99.9
150	7.839	6.149	4.979	6.214	7.033	6.242	4.986	6.170	140-150	4.006	9789	99.9,99.9
160	7.351	6.121	5.364	6.159	6.646	6.133	5.365	6.374	150-160	2.833	9792	100,100
170	6.822	5.990	5.700	5.961	6.263	5.908	5.645	6.121	160-170	1.721	9794	100,100
180	6.018	5.853	5.733	5.823	6.029	5.853	5.733	5.823	170-180	0.5648	9795	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.97	.93	.99	.95	.91	.94	.91	.88	.90	.87	.85	.86	.84	.81	.79
2.0	.88	.81	.75	.86	.80	.74	.82	.77	.72	.78	.74	.70	.75	.71	.68	.65
3.0	.77	.69	.62	.76	.68	.61	.72	.65	.60	.69	.63	.59	.66	.61	.57	.55
4.0	.68	.59	.53	.67	.59	.52	.64	.57	.51	.61	.55	.50	.59	.53	.49	.47
5.0	.61	.52	.45	.60	.51	.45	.57	.50	.44	.55	.48	.43	.53	.47	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.38	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.35	.49	.40	.34	.47	.39	.34	.45	.38	.33	.44	.38	.33	.31
8.0	.45	.37	.31	.45	.36	.31	.43	.36	.30	.41	.35	.30	.40	.34	.30	.28
9.0	.42	.33	.28	.41	.33	.28	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22

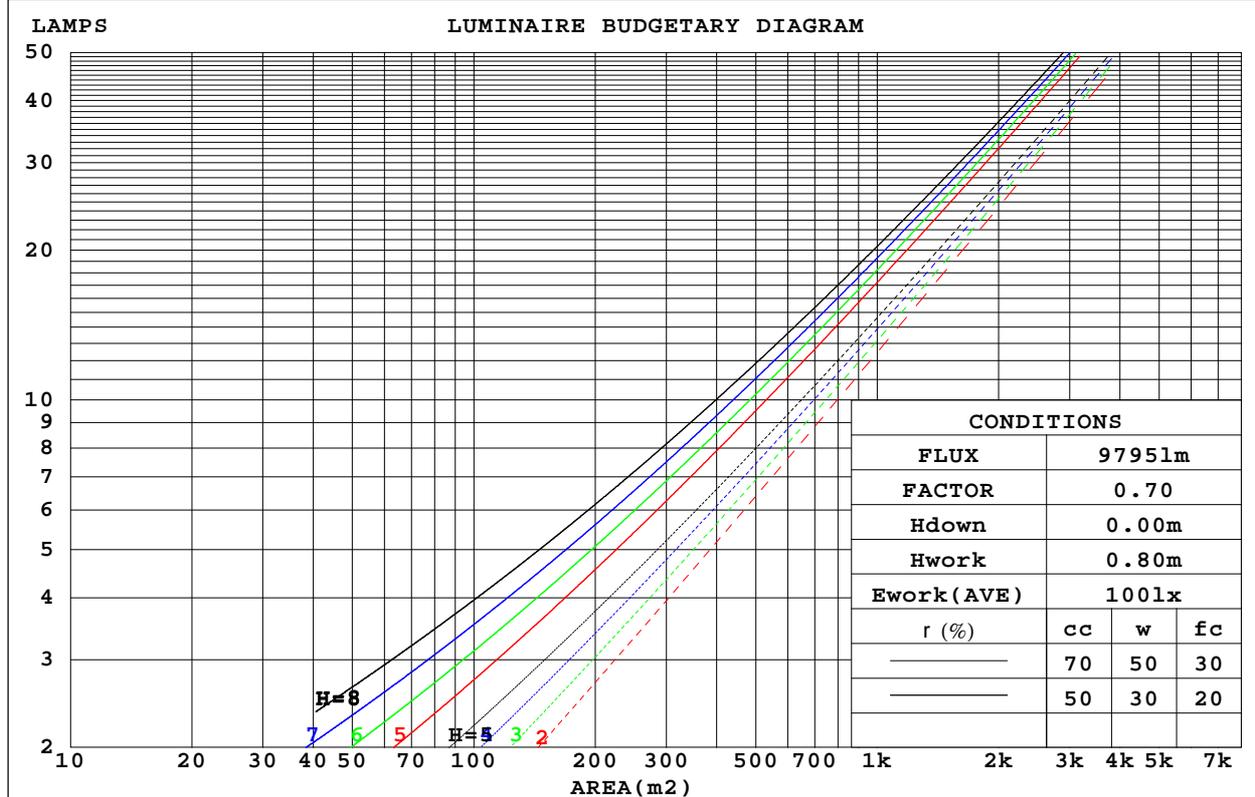

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

WEC AND CCEC

rcc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.334	.190	.060	.326	.186	.059	.311	.178	.057	.297	.171	.055	.284	.165	.053	
2.0	.304	.167	.051	.297	.164	.050	.284	.158	.049	.271	.152	.048	.260	.147	.046	
3.0	.278	.148	.044	.271	.145	.044	.259	.141	.043	.248	.136	.042	.238	.132	.041	
4.0	.254	.132	.039	.249	.130	.038	.238	.126	.038	.228	.122	.037	.219	.119	.036	
5.0	.234	.119	.035	.229	.117	.034	.219	.114	.034	.210	.111	.033	.202	.108	.032	
6.0	.216	.108	.031	.212	.107	.031	.203	.104	.030	.195	.101	.030	.188	.099	.029	
7.0	.201	.099	.028	.197	.098	.028	.189	.096	.028	.182	.093	.027	.175	.091	.027	
8.0	.187	.091	.026	.183	.090	.026	.177	.088	.025	.170	.086	.025	.164	.084	.025	
9.0	.175	.085	.024	.172	.084	.023	.166	.082	.023	.160	.080	.023	.154	.078	.023	
10.0	.164	.079	.022	.161	.078	.022	.156	.076	.021	.150	.075	.021	.145	.073	.021	

rcc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.214	.214	.214	.183	.183	.183	.125	.125	.125	.072	.072	.072	.023	.023	.023	
1.0	.205	.179	.156	.176	.154	.134	.120	.106	.093	.069	.061	.054	.022	.020	.017	
2.0	.198	.155	.120	.169	.134	.104	.116	.093	.072	.067	.054	.042	.021	.017	.014	
3.0	.190	.138	.097	.163	.119	.084	.112	.083	.059	.064	.048	.035	.021	.016	.011	
4.0	.182	.125	.081	.156	.108	.071	.107	.075	.050	.062	.044	.029	.020	.014	.010	
5.0	.174	.115	.071	.150	.099	.061	.103	.069	.043	.060	.041	.026	.019	.013	.008	
6.0	.167	.106	.063	.144	.092	.055	.099	.064	.039	.057	.038	.023	.019	.012	.008	
7.0	.160	.100	.057	.138	.086	.050	.095	.060	.035	.055	.036	.021	.018	.012	.007	
8.0	.154	.094	.053	.132	.081	.046	.092	.057	.033	.053	.034	.019	.017	.011	.006	
9.0	.147	.089	.049	.127	.077	.043	.088	.054	.030	.051	.032	.018	.017	.011	.006	
10.0	.142	.085	.047	.122	.073	.041	.085	.052	.029	.049	.031	.017	.016	.010	.006	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.1	25.6	24.4	25.8	26.1	22.9	24.4	23.2	24.6	24.9
3H	25.9	27.3	26.2	27.5	27.9	24.2	25.6	24.6	25.9	26.2
4H	26.7	28.1	27.1	28.4	28.7	24.7	26.1	25.1	26.4	26.7
6H	27.6	28.8	28.0	29.2	29.5	25.1	26.3	25.5	26.7	27.0
8H	28.0	29.2	28.4	29.5	29.9	25.2	26.4	25.6	26.7	27.1
12H	28.4	29.6	28.8	29.9	30.3	25.2	26.4	25.6	26.8	27.1
4H 2H	24.6	25.9	25.0	26.2	26.6	23.7	25.0	24.1	25.4	25.7
3H	26.6	27.8	27.0	28.2	28.5	25.3	26.5	25.7	26.8	27.2
4H	27.7	28.8	28.1	29.1	29.5	26.0	27.0	26.4	27.4	27.8
6H	28.7	29.7	29.2	30.1	30.5	26.5	27.4	26.9	27.8	28.3
8H	29.3	30.1	29.7	30.6	31.0	26.7	27.5	27.1	28.0	28.4
12H	29.8	30.6	30.3	31.1	31.5	26.8	27.6	27.2	28.0	28.5
8H 4H	28.0	28.9	28.5	29.3	29.8	26.5	27.4	27.0	27.9	28.3
6H	29.3	30.0	29.8	30.5	31.0	27.3	28.1	27.8	28.5	29.0
8H	30.0	30.7	30.5	31.1	31.7	27.7	28.3	28.2	28.8	29.3
12H	30.8	31.3	31.3	31.8	32.4	27.9	28.5	28.5	29.0	29.5
12H 4H	28.0	28.8	28.5	29.3	29.8	26.7	27.5	27.1	27.9	28.4
6H	29.4	30.1	29.9	30.5	31.1	27.6	28.3	28.1	28.7	29.3
8H	30.2	30.8	30.7	31.3	31.8	28.1	28.6	28.6	29.1	29.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.5				

CIE Pub.117 Corrected 9795 lm Total Lamp Luminous Flux.(8log(F/F0) = 7.9)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	36	30
0.80	65	54	46	64	53	46	62	52	45	38
1.00	74	62	55	72	62	54	70	63	54	46
1.25	81	70	62	79	69	62	76	67	61	53
1.50	86	75	68	84	74	67	81	72	66	58
2.00	93	83	76	91	82	76	87	80	74	65
2.50	97	88	82	94	87	81	90	84	78	69
3.00	100	92	86	98	91	85	93	87	83	73
4.00	104	98	93	101	96	91	97	92	88	78
5.00	107	101	97	104	99	95	99	95	91	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Conical surface Flux(90deg):

4909.3 lm

%lum = 50.1%


%lamp = 50.1%

Conical surface Flux(120deg):

7215.5 lm

%lum = 73.7%


%lamp = 73.7%

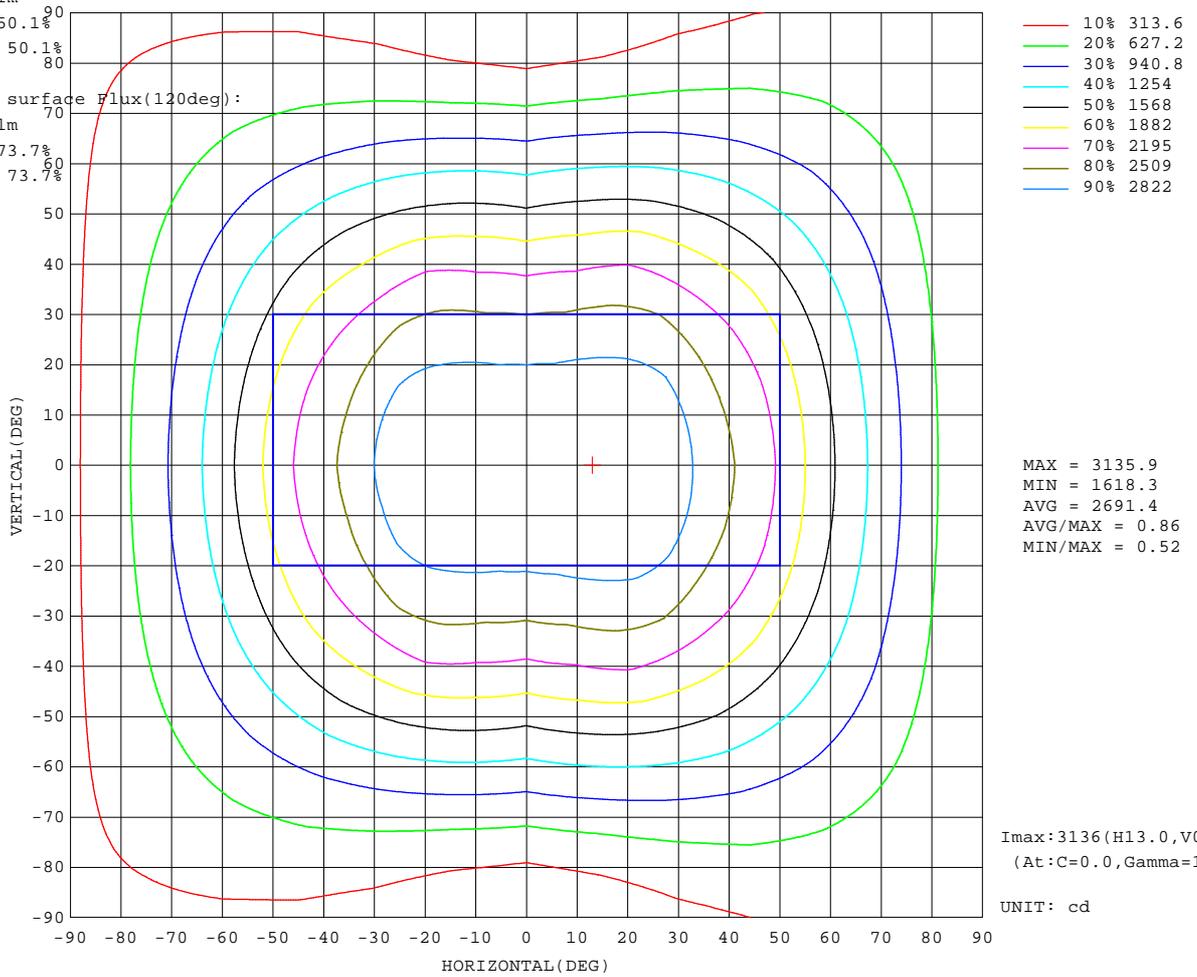

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

AAI Figure

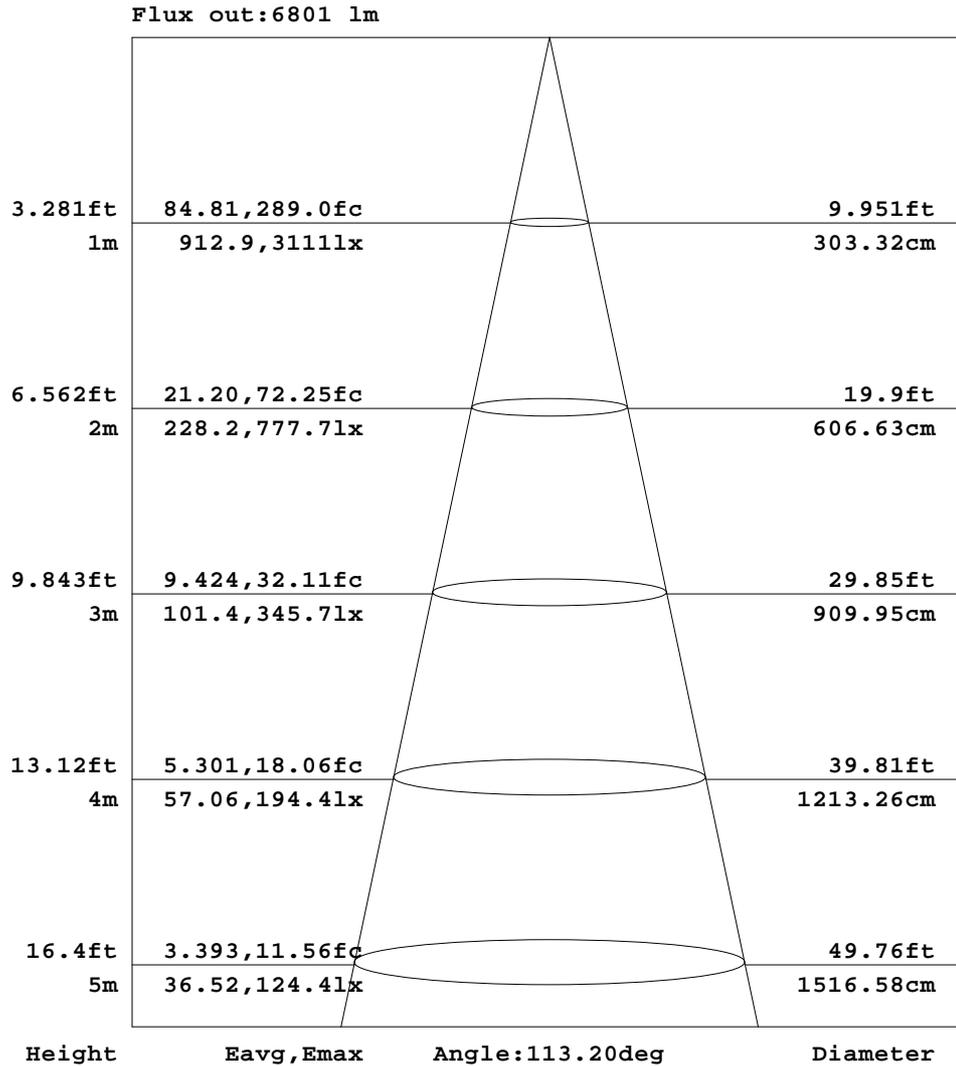


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:


ISOLUX DIAGRAM

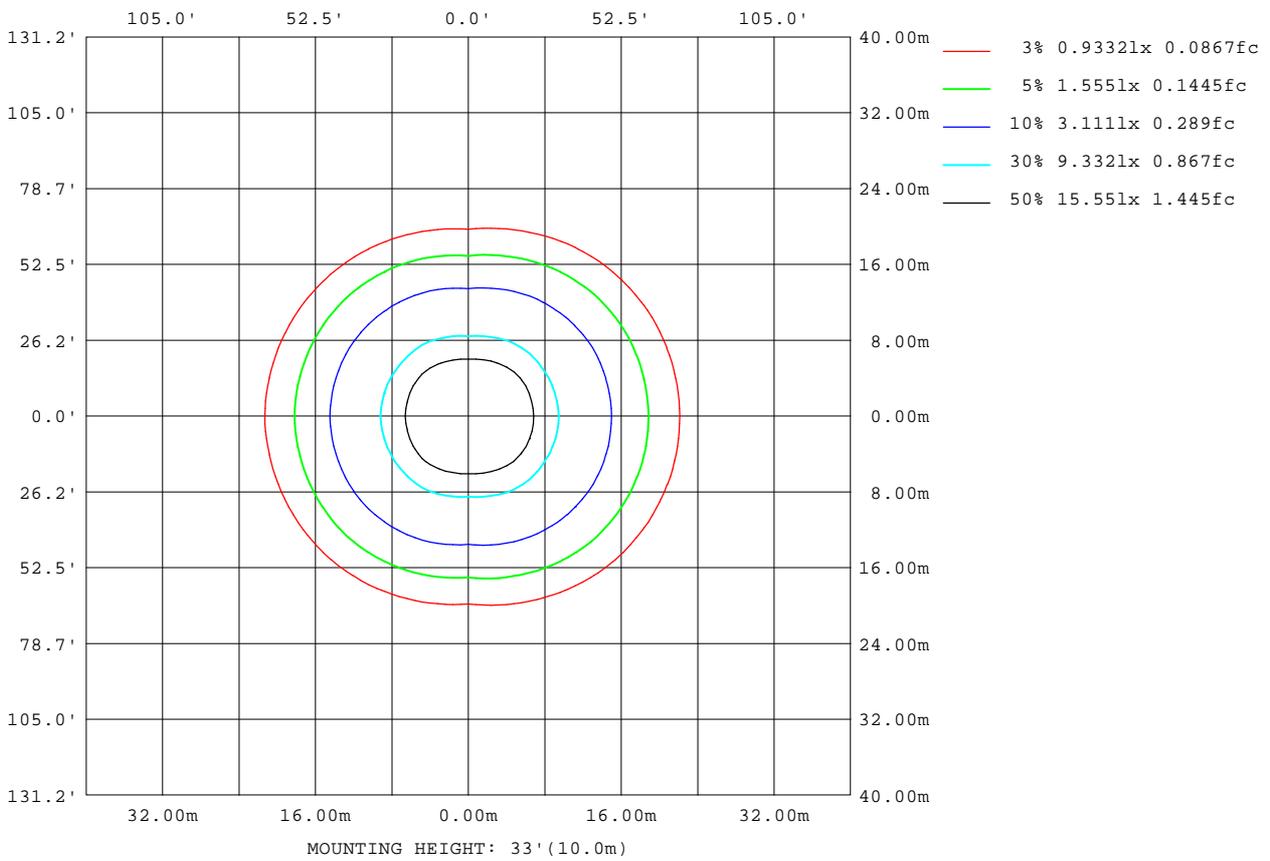

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

Planar Illuminance Curve

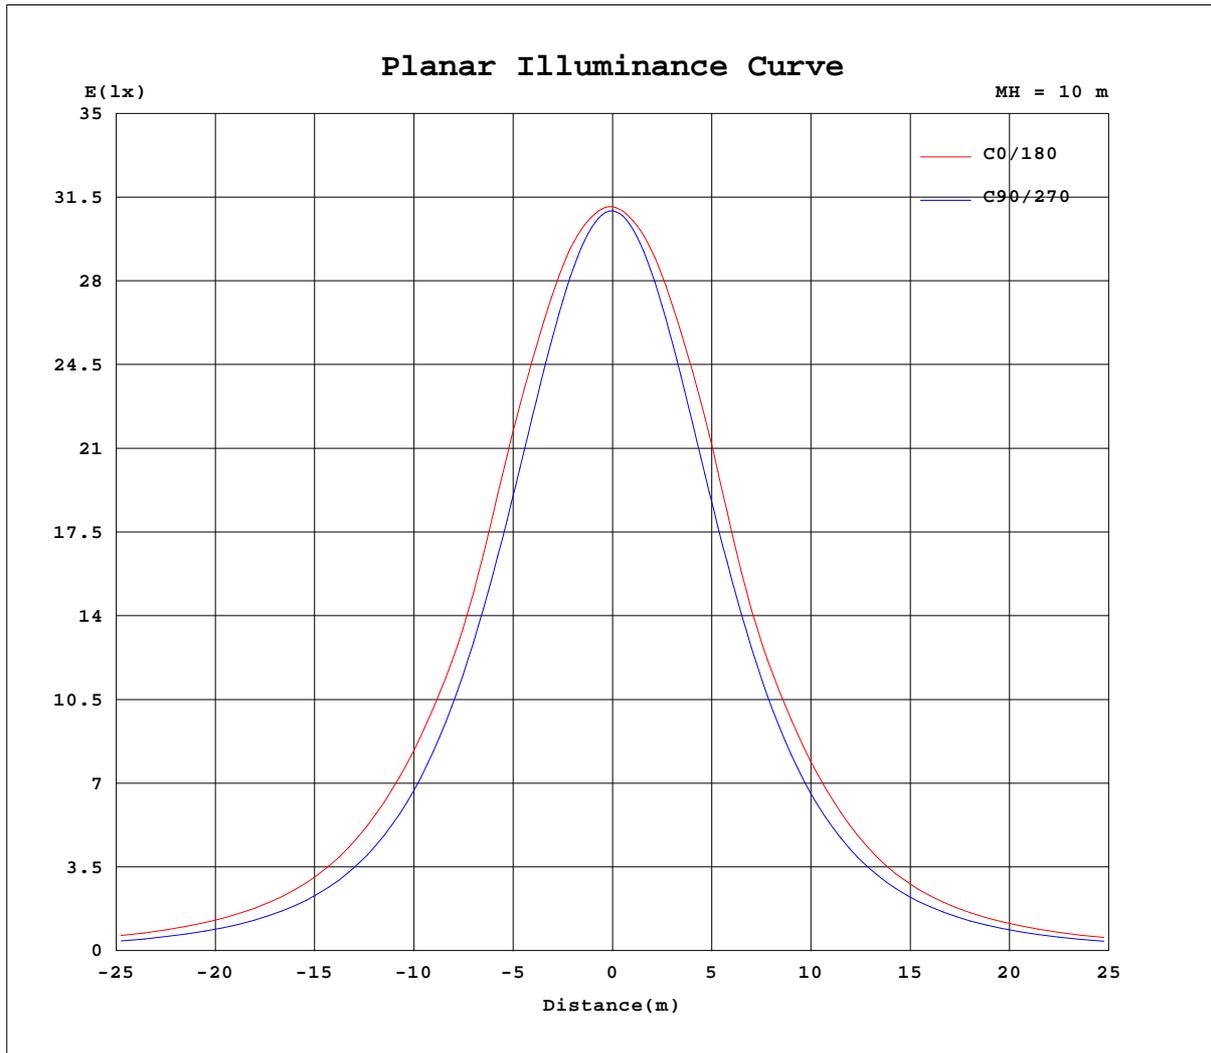

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) g (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	3096	3096	3096	3096	3096	3096	3096	3096	3096	3096	3096	3096	3096	3096	3096	3096	3096	3096	3096
5	3102	3102	3099	3095	3091	3087	3084	3083	3083	3085	3087	3088	3087	3086	3083	3079	3076	3074	3076
10	3116	3112	3099	3080	3060	3048	3039	3040	3049	3064	3078	3085	3087	3082	3069	3052	3034	3023	3023
15	3120	3114	3091	3053	3008	2977	2962	2968	2994	3027	3054	3069	3073	3063	3042	3009	2973	2944	2938
20	3096	3089	3058	3007	2936	2878	2854	2868	2916	2967	3007	3031	3039	3024	2991	2944	2889	2837	2822
25	3050	3042	3000	2933	2840	2752	2714	2741	2812	2884	2940	2971	2980	2962	2922	2856	2781	2704	2677
30	2927	2935	2909	2833	2719	2600	2545	2587	2682	2775	2818	2813	2813	2805	2800	2743	2649	2547	2505
35	2713	2727	2735	2698	2570	2423	2350	2409	2528	2615	2600	2582	2585	2573	2580	2578	2492	2367	2308
40	2531	2527	2506	2500	2395	2226	2133	2208	2343	2383	2373	2398	2413	2388	2351	2343	2305	2167	2092
45	2362	2355	2303	2256	2185	2010	1901	1990	2117	2136	2177	2212	2227	2201	2155	2095	2077	1949	1861
50	2143	2143	2096	2016	1939	1780	1660	1755	1856	1903	1955	1975	1985	1965	1934	1864	1817	1717	1622
55	1874	1880	1854	1778	1674	1539	1418	1510	1591	1659	1691	1696	1703	1686	1672	1622	1555	1474	1383
60	1606	1609	1582	1525	1414	1292	1177	1257	1332	1397	1417	1430	1441	1420	1400	1363	1301	1225	1146
65	1360	1359	1322	1264	1160	1044	940	1007	1079	1138	1168	1189	1201	1180	1153	1107	1053	978	915
70	1122	1121	1085	1019	918	803	710	766	840	904	942	960	970	953	929	879	819	743	690
75	889	892	865	804	701	580	487	544	630	702	736	745	750	739	726	682	615	528	473
80	674	680	666	616	514	381	279	350	454	528	552	551	553	547	545	513	444	341	270
85	485	493	488	455	361	223	107	198	312	380	395	391	391	389	391	370	305	196	105
90	338	346	344	318	241	115	26.2	97.6	202	260	275	271	271	271	271	255	199	98.2	24.6
95	240	242	240	216	149	51.6	20.6	41.4	120	173	193	194	196	195	191	171	120	42.6	19.0
100	175	175	167	141	83.8	19.2	16.7	15.9	63.6	111	133	141	144	140	132	109	65.0	15.3	15.3
105	128	126	115	87.4	39.7	13.4	13.5	12.8	27.5	66.5	90.8	102	106	102	91.1	66.3	29.0	11.6	12.3
110	93.2	90.2	76.3	49.5	14.3	11.1	10.8	10.6	11.3	35.2	58.6	71.8	76.5	71.7	59.1	35.5	10.7	9.69	9.80
115	64.9	61.2	46.7	22.9	10.2	9.15	8.72	8.79	9.56	14.9	33.5	46.6	51.6	46.7	34.3	15.2	8.97	8.08	7.85
120	40.8	37.2	24.5	11.2	8.64	7.54	7.04	7.25	8.19	10.4	16.1	26.2	30.6	26.3	16.6	10.1	7.78	6.78	6.41
125	21.7	19.2	13.9	9.41	7.27	6.30	5.82	6.08	6.98	8.87	11.5	13.9	15.7	13.6	11.4	8.77	6.81	5.81	5.41
130	14.5	13.7	10.6	8.01	6.24	5.42	4.99	5.24	6.15	7.76	9.74	11.4	12.0	11.0	9.63	7.72	6.04	5.09	4.70
135	11.7	11.0	8.68	7.06	5.80	4.99	4.54	4.90	5.83	7.01	8.44	9.57	10.0	9.16	8.37	7.02	5.78	4.85	4.42
140	9.77	9.19	7.53	6.47	5.63	5.01	4.59	4.96	5.69	6.54	7.50	8.32	8.61	7.86	7.47	6.57	5.70	4.96	4.57
145	8.55	7.95	6.96	6.16	5.68	5.07	4.77	5.07	5.67	6.30	6.93	7.49	7.65	7.02	6.92	6.36	5.71	5.10	4.78
150	7.84	6.97	6.66	6.15	5.69	5.16	4.98	5.20	5.69	6.21	6.66	7.03	7.03	6.52	6.62	6.24	5.75	5.24	4.99
155	7.46	6.51	6.54	6.19	5.73	5.32	5.16	5.33	5.77	6.18	6.53	6.82	6.82	6.28	6.47	6.18	5.80	5.28	5.19
160	7.35	6.36	6.47	6.12	5.78	5.48	5.36	5.49	5.80	6.16	6.43	6.67	6.65	6.15	6.37	6.13	5.80	5.37	5.37
165	7.21	6.15	6.27	6.07	5.80	5.63	5.55	5.61	5.81	6.08	6.34	6.53	6.48	6.00	6.23	6.05	5.76	5.52	5.52
170	6.82	5.83	6.09	5.99	5.87	5.74	5.70	5.73	5.81	5.96	6.15	6.28	6.26	5.74	6.02	5.91	5.75	5.62	5.65
175	6.34	5.58	5.95	5.92	5.88	5.80	5.79	5.78	5.81	5.86	5.92	6.00	6.15	5.60	5.90	5.90	5.85	5.78	5.78
180	6.02	5.51	5.85	5.85	5.80	5.77	5.73	5.74	5.78	5.82	5.89	6.01	6.03	5.51	5.86	5.85	5.80	5.77	5.73

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--2

UNIT: cd

C(DEG) g (DEG)	285	300	315	330	345														
0	3096	3096	3096	3096	3096														
5	3078	3084	3089	3096	3100														
10	3030	3046	3067	3090	3108														
15	2952	2987	3034	3079	3108														
20	2845	2908	2982	3043	3081														
25	2713	2807	2904	2982	3033														
30	2556	2682	2800	2892	2927														
35	2376	2532	2665	2722	2720														
40	2178	2356	2469	2491	2518														
45	1963	2150	2222	2286	2346														
50	1735	1909	1983	2081	2136														
55	1499	1646	1748	1842	1874														
60	1257	1388	1499	1572	1603														
65	1015	1139	1240	1314	1354														
70	778	900	999	1078	1118														
75	559	684	786	861	890														
80	364	500	602	662	679														
85	210	350	443	486	492														
90	104	230	310	342	344														
95	45.1	142	210	237	243														
100	16.2	78.6	135	165	175														
105	12.1	35.7	83.7	114	126														
110	10.0	12.8	46.4	75.6	89.8														
115	8.26	9.51	20.9	46.3	60.9														
120	6.90	8.03	10.8	24.3	36.9														
125	5.94	6.88	9.03	13.5	19.1														
130	5.24	6.00	7.60	10.2	13.7														
135	4.98	5.69	6.75	8.25	11.2														
140	5.09	5.66	6.32	7.28	9.16														
145	5.25	5.82	6.14	6.83	7.94														
150	5.37	5.94	6.17	6.61	7.07														
155	5.51	6.02	6.32	6.55	6.71														
160	5.60	6.05	6.37	6.59	6.69														
165	5.66	5.96	6.34	6.57	6.69														
170	5.71	5.88	6.12	6.31	6.51														
175	5.80	5.87	5.98	6.08	6.24														
180	5.75	5.79	5.82	5.90	6.01														

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-06-20

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks: