


LED Downlight

DLU2-6-20CCT

- Reflector+Lens (UGR<19).
- Presetable tri-white type.
- Various ring frame for options.
Replaceable: Round/Square/ Glass
- Surface mounted housing for options.
- Aluminum housing.
- Recessed and Surface installation.

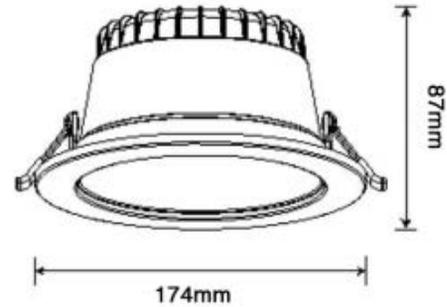

100 lm/W



Specification | Technical & Product Data:

LED TYPE	SMD 2835
Wattage	20 W
Frequency	50-60 HZ
Power Factor	>0.9
Light color	Warm / Natural / Cold white
Color Temperature	3000K/4000K/5700K
SDCM	<5
Light efficiency	typ. 100 lm/W
Luminous flux	typ. 2000 lm
CRI	>80
Size	Ø174*87 / Ø145-155mm
Lifespan L80/B10	50000 hrs at 25 °C
IP rate	IP64
ON/O ffcycles	>50000
Working conditions	-20 °C - 45 °C
Material	PC+Aluminum
Body Color	White
Certification	CE CB ERP RoHS
Type of light source	F
Warranty	5 Years
Beam Angle	60°

LED Driver

Driver	PHILIPS CertaDrive
Input Voltage	220-240 V~
Output Voltage	30-42 V DC

IP64 IK06 CE RoHS