


- 2 in 1 installation available (Recessed and surface mounted).
- Thermal conductive plastic housing, V-0 flame rating.
- Presettable 3CCT and dual power for option.
- Clips adjustable for cut-holes with different sizes.
- Driver built in , Integrated design.
- IP44 , Suitable for different application ,eg, hotel, shopping mall, office.

LED Ceiling Downlight DLR1-300-DP3S

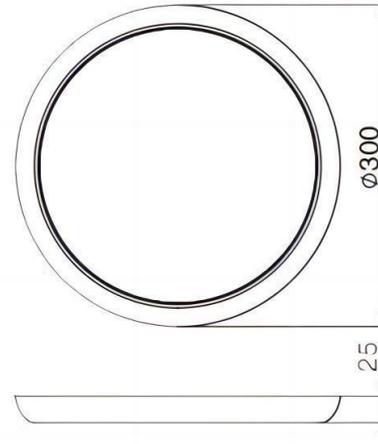

Specification | Technical & Product Data:

LED TYPE	SMD 2835
Wattage	25W
Input	50/60 HZ
Power Factor	>0.9
Color Temperature	VW3000K / NW4000K / CW6000K
SDCM	<5
Light efficiency	typ. 100lm/W
Luminous flux	2125lm / 2375lm / 2250lm
CRI	>80
Cutout	φ150-270mm
Size	φ300-25mm
Lifespan L80/B10	50000 hrs at 25 C
IP rate	IP44
ON/Off cycles	>50000
Working conditions	-20 C - 45 C
Material	PC
Body Color	White
Certification	CB CE ERP RoHS
Type of light source	◀ F
Warranty	3 Years
Model	Sensor model



LED Driver

Driver	Internal driver
Input Voltage	220-240 V~

