



# LED LINEAR LIGHT SERIES





Add: No.2 Building, No.688 Hang Xing Rd, Hangzhou

Tel: +86-186 5511 3201




Email: [info@holux.net](mailto:info@holux.net)

Web: [www.holux.net](http://www.holux.net)

# Application

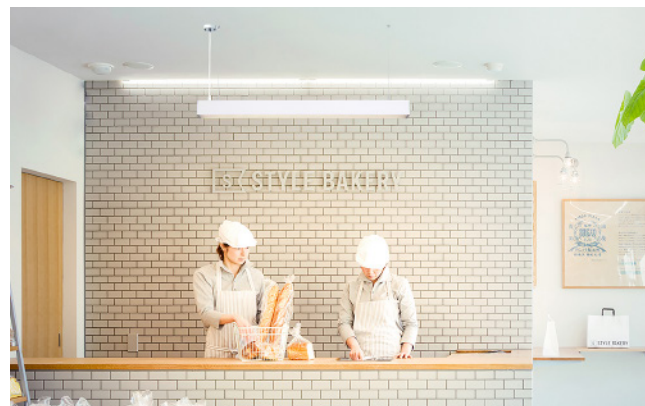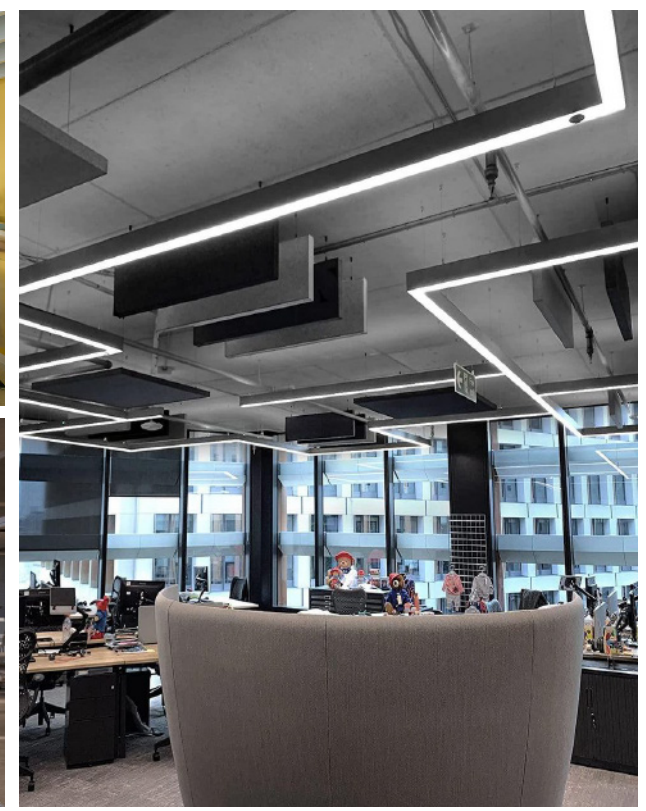

# LED linear light Pro series

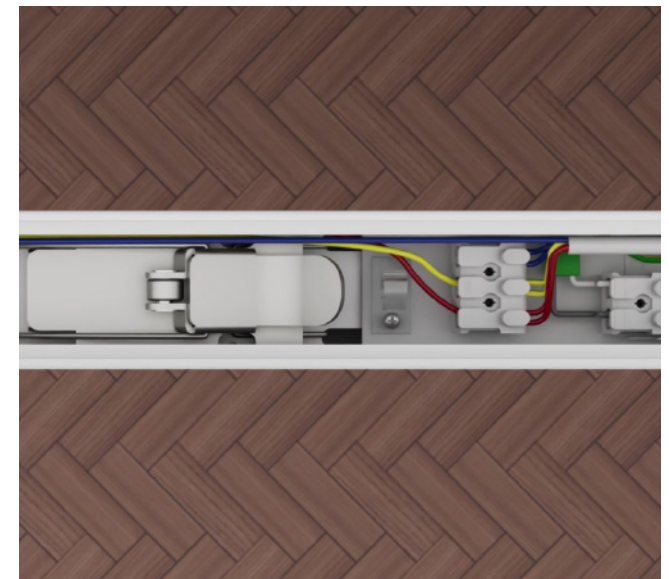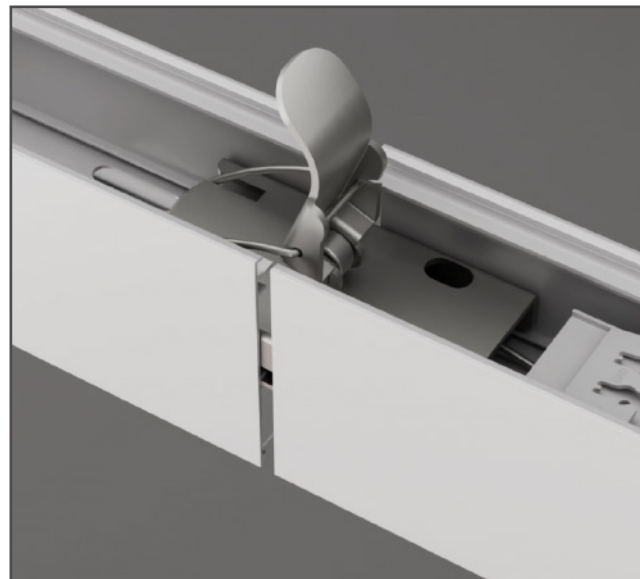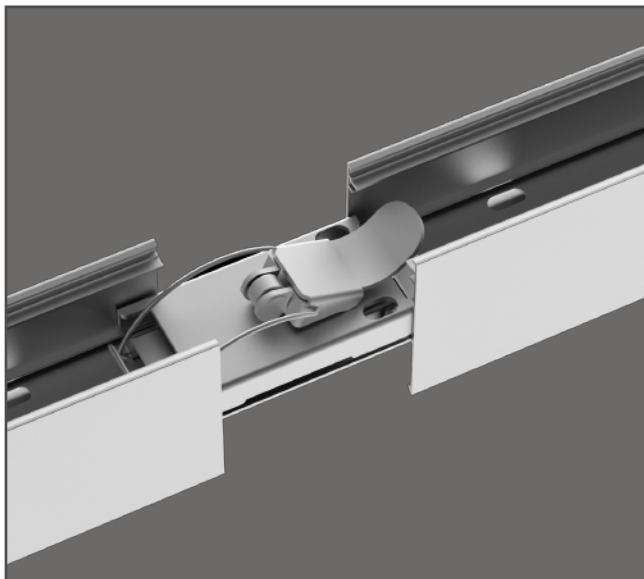


# U1 Advantage




## > Advantage

1. 125lm/W.
2. Screwless design on the exterior, simple and elegant.
3. Easy, quick and firm splicing.
4. The PC prism diffuser type provides excellent glare control and comfortably protects people's eyes.
5. The linear light can be in the LXT shape, suitable for customers to create various designs.
6. It can be suspended, surface-mounted or wall-mounted.
7. DALI and CCT are available for selection.



Product code	Size (mm)	Wattage	Luminous Flux	CCT	Lampshade & Colors	Drive
LL-12-26U1-WO 840	L1200xW50xH72.8	26W	3380LM	4000K	white housing+Micro-Prism	BOKE CWL iron shell drive
LL-12-26U1-BO 840	L1200xW50xH72.8	26W	3250LM	4000K	black housing+Micro-Prism	BOKE CWL iron shell drive
LL-12-26U1-WD CCT	L1200xW50xH72.8	26W	3250LM	3000K/3500K/4000K	white housing+Micro-Prism	BOKE iron shell DALI drive
LL-12-26U1-BD CCT	L1200xW50xH72.8	26W	3250LM	3000K/3500K/4000K	black housing+Micro-Prism	BOKE iron shell DALI drive
LL-15-32U1-WO 840	L1500xW50xH72.8	32W	4160LM	4000K	white housing+Micro-Prism	BOKE CWL iron shell drive
LL-15-32U1-BO 840	L1500xW50xH72.8	32W	4000LM	4000K	black housing+Micro-Prism	BOKE CWL iron shell drive
LL-15-32U1-WD CCT	L1500xW50xH72.8	32W	4000LM	3000K/3500K/4000K	white housing+Micro-Prism	BOKE iron shell DALI drive
LL-15-32U1-BD CCT	L1500xW50xH72.8	32W	4000LM	3000K/3500K/4000K	black housing+Micro-Prism	BOKE iron shell DALI drive

# | U1 Advantage


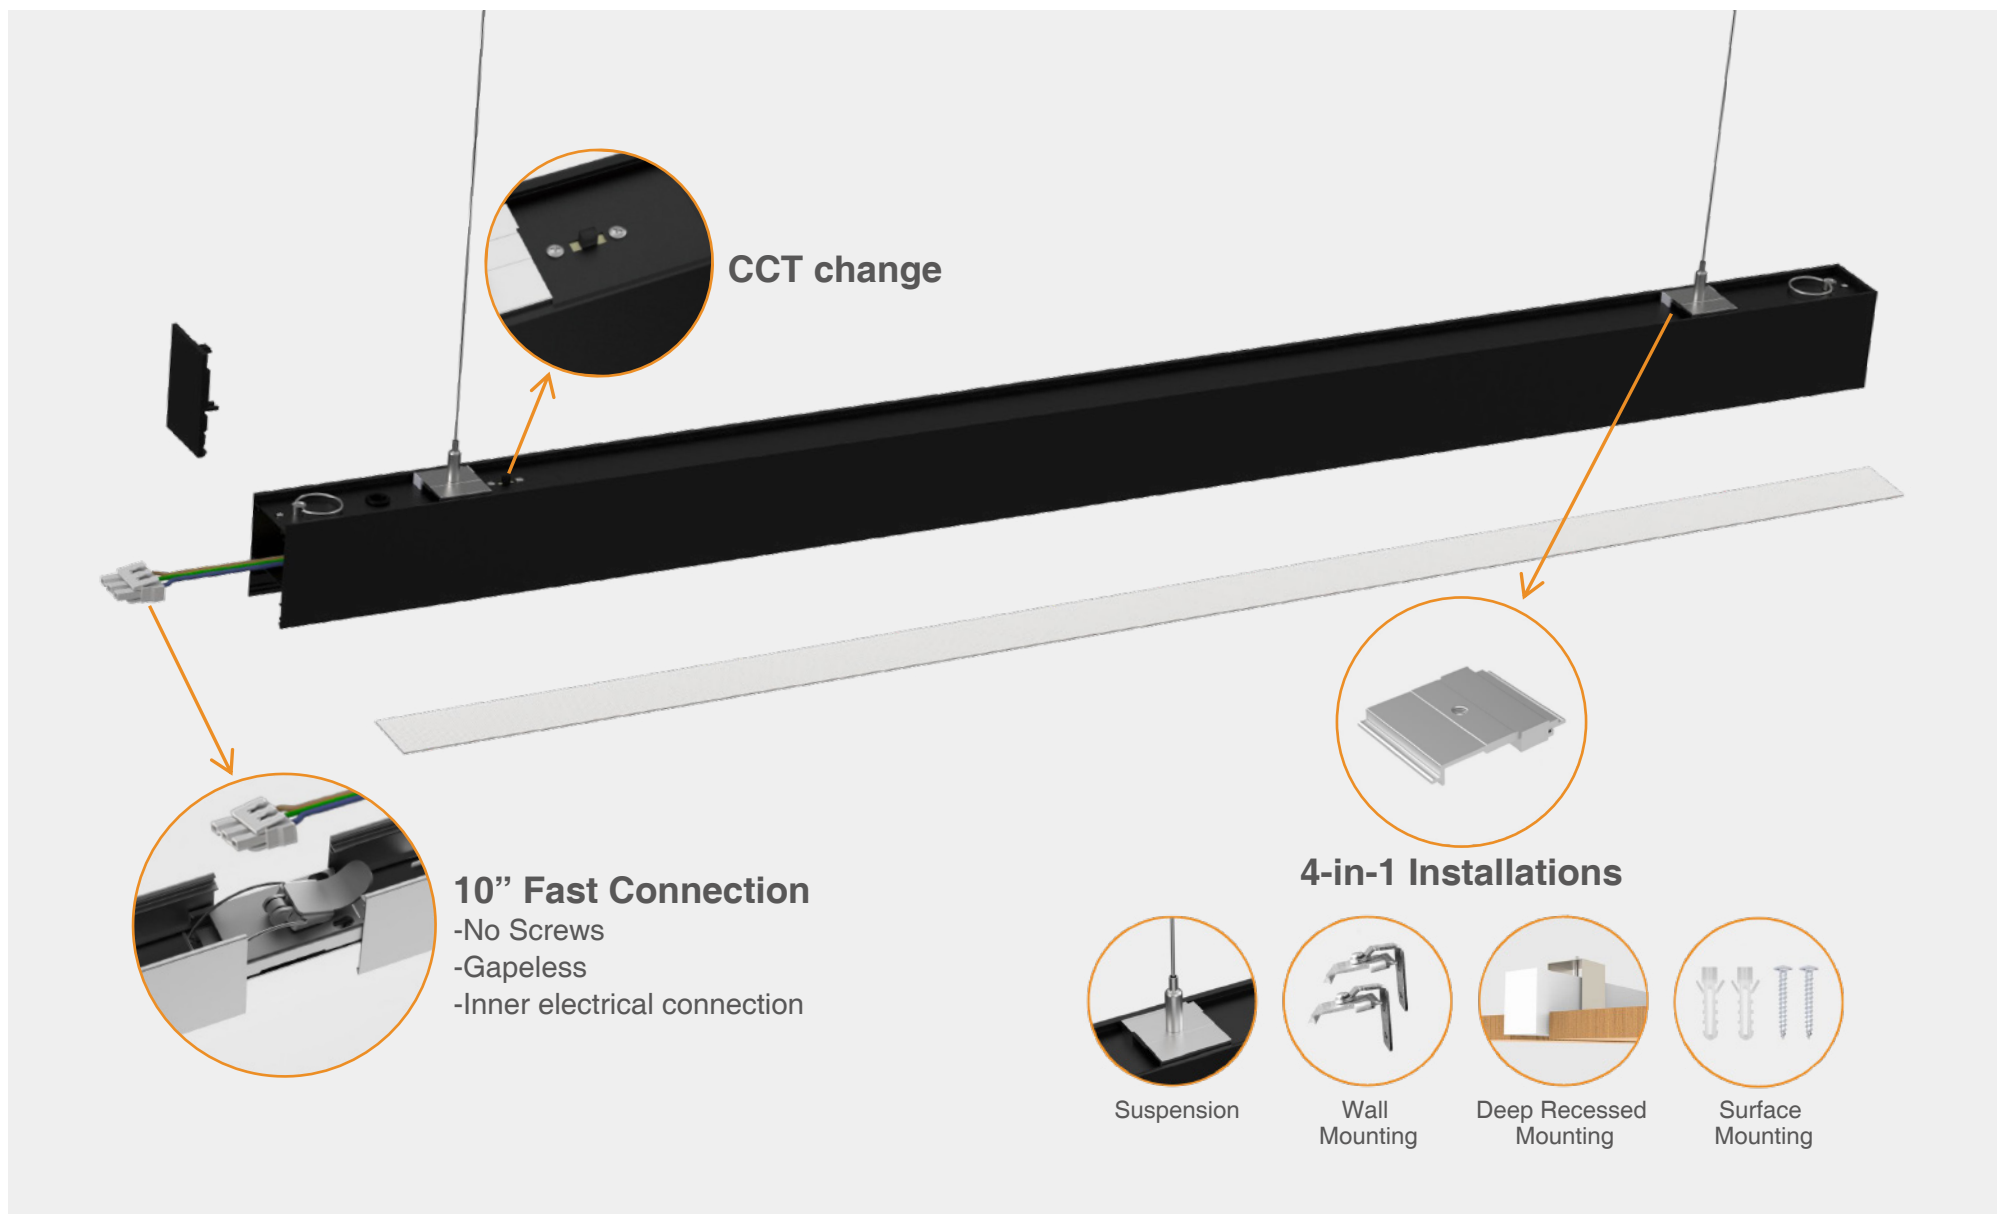


# L1 Advantage



## > Advantage

1. 160lm/W.
2. Module-replaceable Down lighting.
3. Multiply PC reflective cup  
- Silver/Black/White optional
4. PMMA Lens control, lower than UGR<19  
- Offering nice glare-control  
- Protecting people's eye perfectly
5. The linear light can be in the LXT shape, suitable for customers to create various designs.
6. It can be suspended, surface-mounted or wall-mounted.
7. DALI are available for selection.

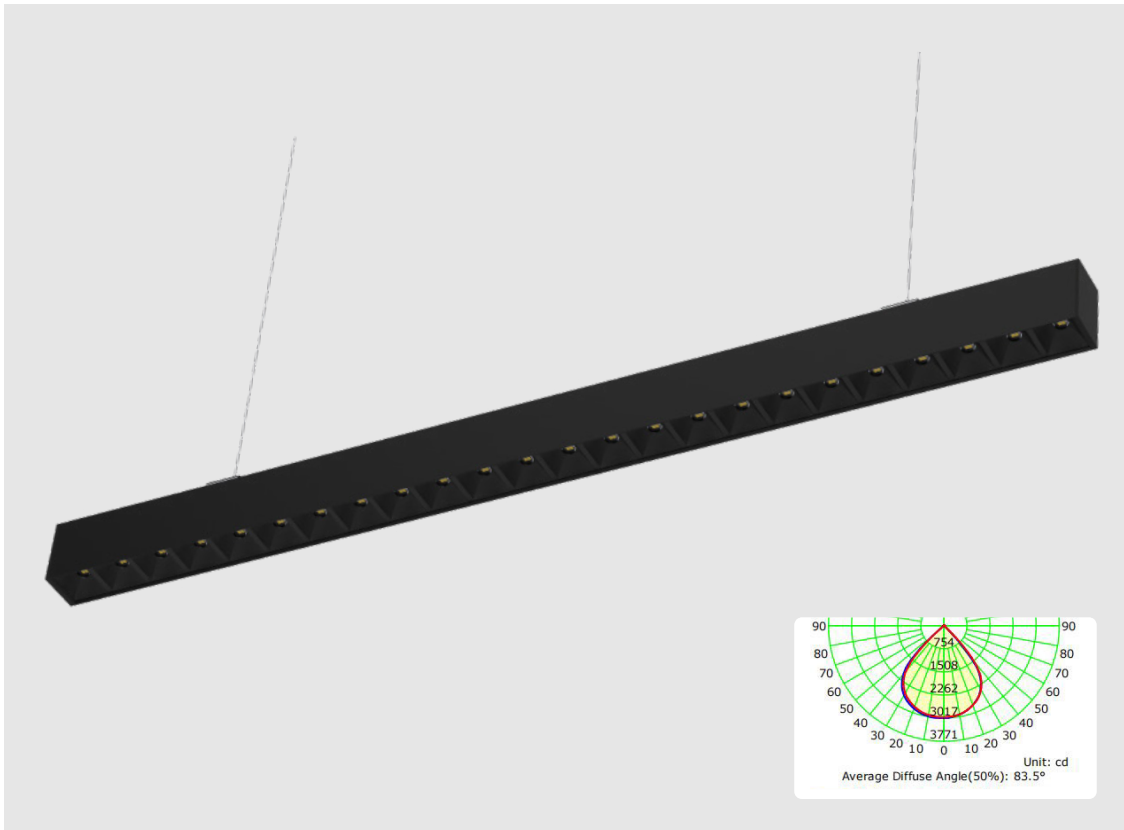

**240V**  
 $\overline{\overline{\text{AC/DC}}}$   
**220V**

**Ra**  
 $\geq 80$   
**CRI**

$>0.9$   
**PF**

**80°**  
**BEAM ANGLE**

Product code	Size (mm)	Wattage	Luminous Flux	CCT	Lampshade & Colors	Drive
LL-12-24L1-BO 840	L1147xW50xH72.8	24W	3840LM	4000K	black housing+black cover+lens	BOKE drive
LL-12-24L1-BD 840	L1147xW50xH72.8	24W	3840LM	4000K	black housing+black cover+lens	BOKE iron shell DALI drive

# L1 Advantage



**10" Fast Connection**  
-No Screws  
-Gapeless  
-Inner electrical connection

**Down lighting replaceable**


**4-in-1 Installations**

- Suspension
- Wall Mounting
- Deep Recessed Mounting
- Surface Mounting


# Product Description




- **L-shape unilluminous**

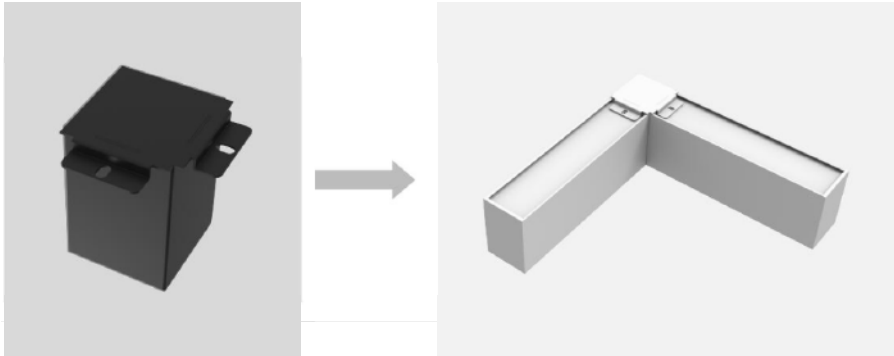

- **T-shape unilluminous**

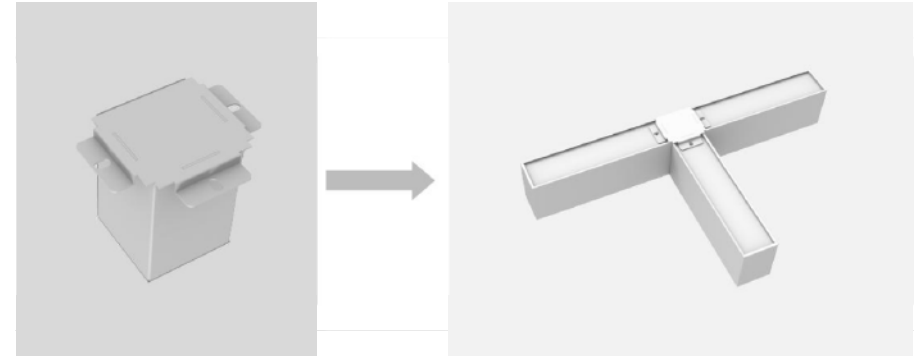


- **X-shape unilluminous**

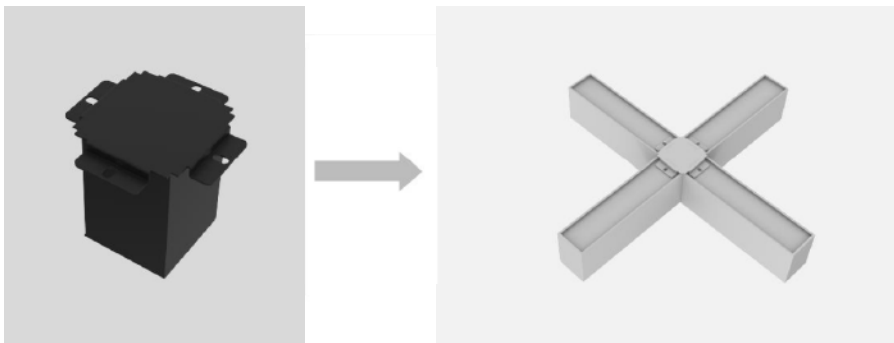


- **Accessories:**

- Without LED SPCC connector

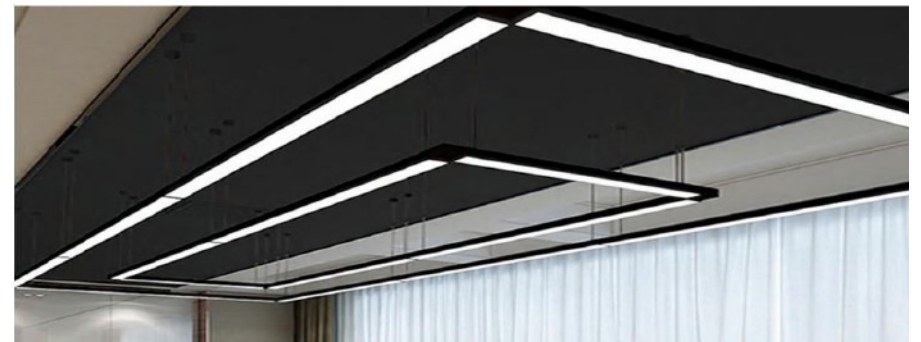


# Accessories

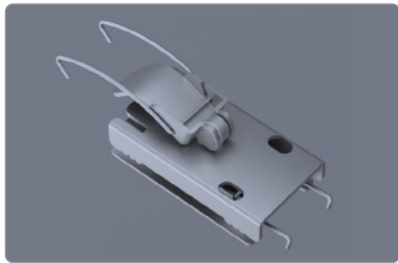


**LL-L1**  
Fast straight splice-  
hand-breakable style




**LL-L2**  
Luminous L  
splices

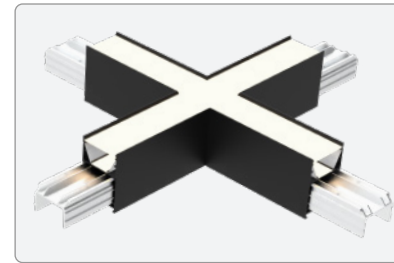

**LL-X2**  
Luminous X  
splices

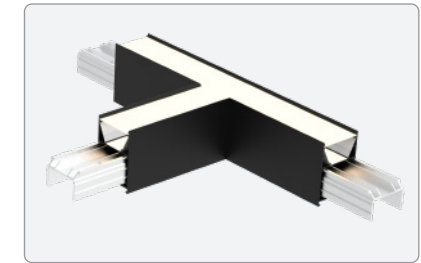

**LL-T2**  
Luminous T  
splices

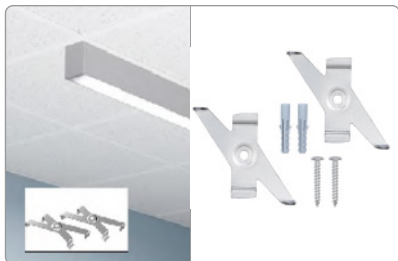

**LL-M**  
surface mounting  
accessories



**LL-Q**  
Bridge Frame Fittings  
-Several fonts, without base




**LL-Y**  
Single disk +AC line  
-Disk - with five core wire plus three core and two  
core terminals (including ground wire, including  
terminal), AC wire 1.5M long



**LL-H2**  
Suspension accessories  
-Suspension accessories,  
without base




**LL-H**  
Suspension accessories

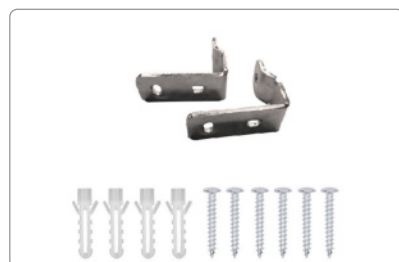

**LL-W**  
Wall fittings  
-Wall fittings, not including base





**LL-D**  
Base  
-can be mounted separately or with  
all mounting accessories

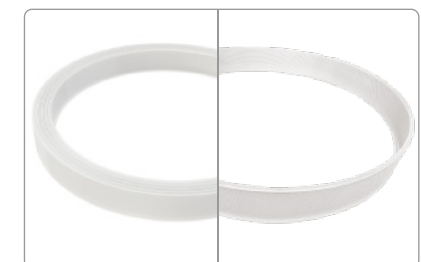

**LL-O**      **LL-P**  
5070 fog degree coil      5070 prismatic coil  
-can be 30M a roll (quoted price per meter)

# Economy Linear Lamp

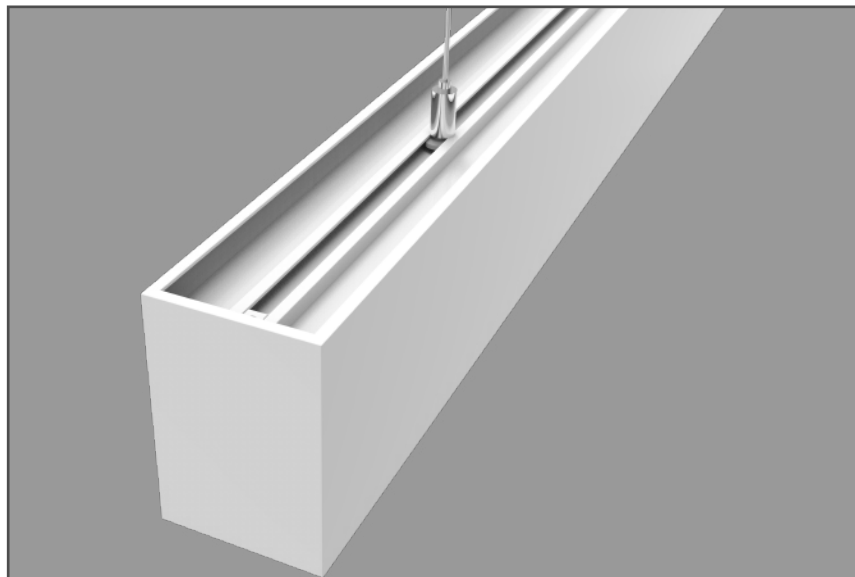
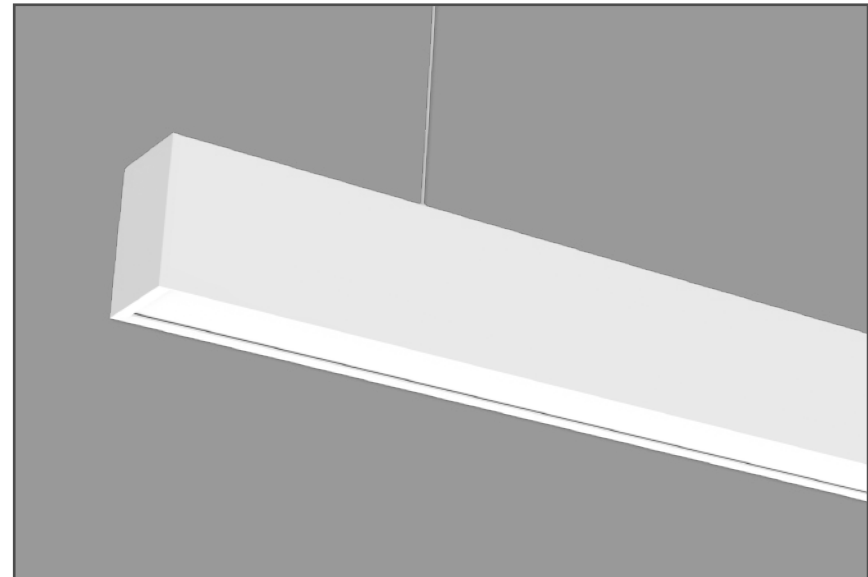


# A1 Advantage



## > Advantage


1. 120lm/W.
2. Screwless design on the exterior, simple and elegant.
3. The PC diffuser type provides excellent glare control and comfortably protects people's eyes.

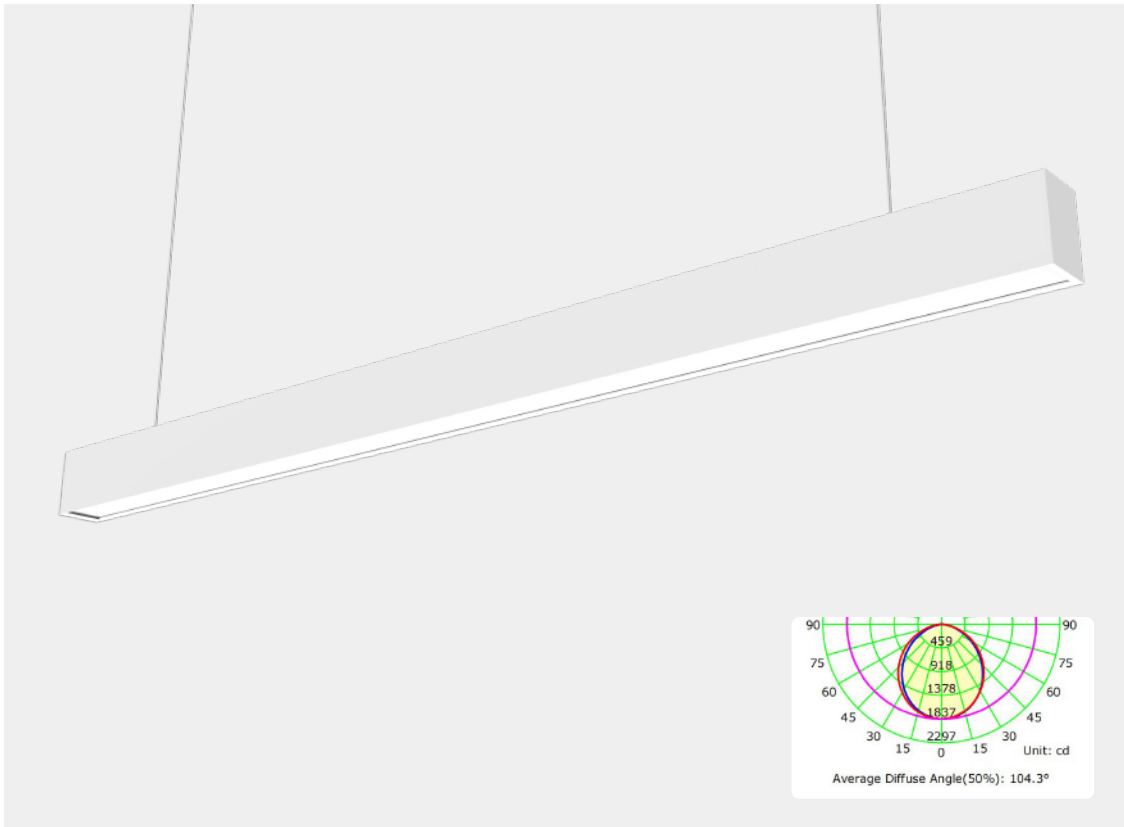

Product code	Size (mm)	Wattage	Luminous Flux	CCT	Lampshade & Colors
LL-12-30A1-WO 840	L1200xW50xH72.8	30W	3600LM	4000K	white housing+Haze diffuser
LL-15-40A1-WO 840	L1500xW50xH72.8	40W	4800LM	4000K	white housing+Haze diffuser

# A1 Advantage

## > 3 different arrangements



### Suspend Mounting-A



Part of hanging wire x2



Hanging wire x2




Part of hanging wire x2



Self-tapping screw x2




Plastic dowel x2



### Surface Mounting-A



Spring x2




Mounting bracket x2



Self-tapping screw x2



Plastic dowel x2



### Canopy Suspension Wire



Suspension wire x1



Suspension wire x1



Self-tapping screw x4



Plastic dowel x4