
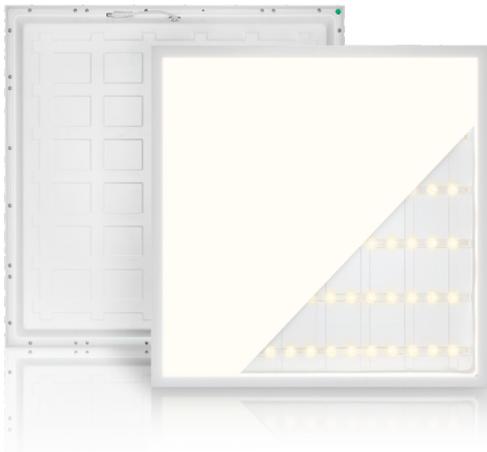


LED PANEL LIGHT

6060 36W 4320lm NW

- Backplane: 0.3mm iron plate.
- Frame: Thickened 6063 aluminum, seamless welding.
- Diffuser: comply with 0.2 N.m mechanical strength test.
- Lens: Mitsubishi PMMA lens, kafuter glue, designed for 20 years using.
- Lifud on-off driver, flicker free, DALI and 0-10V dimmable driver for your choice.
- ENEC – CE - ERP approval from TÜV Rheinland.
- Installation: recessed luminaire, spring fastener installation, ceiling mounting frame installation, suspending bracket installation.
- Application: shopping mall, hotel, office, school, train station, airport, etc.

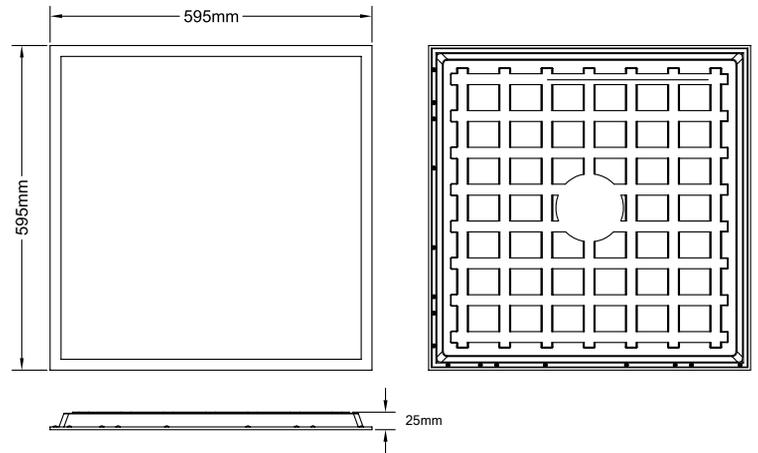

Specification | Technical & Product Data:

| | |
|----------------------|----------------------|
| LED TYPE | SMD 2835 |
| Wattage | 36 W |
| Frequency | 50-60 HZ |
| Power Factor | >0.9 |
| Light color | Natural white |
| Color Temperature | 4000 K |
| SDCM | <5 |
| Light efficiency | typ. 120 lm/W |
| Luminous flux | typ. 4320 lm |
| CRI | >80 |
| UGR | <22 |
| Size | 595 * 595 * 25 mm |
| Lifespan L80/B10 | 50000 hrs at 25 C |
| IP rate | IP40 |
| ON/Off cycles | >30000 |
| Working conditions | -20 C - 45 C |
| Material | Iron + Aluminum + PS |
| Body Color | White |
| Certification | ENEC CE ERP RoHS |
| Type of light source | E |
| Warranty | 3 Years |

LED Driver

| | |
|----------------|---------------------|
| Driver | Lifud on-off driver |
| Input Voltage | 220-240 V~ |
| Output Voltage | 30-42 V DC |

