


LED PANEL LIGHT BP-30120-30U2

- UGR<19
- Backplane: 0.3mm iron plate.
- Frame: Thickened 6063 aluminum, seamless welding.
- Diffuser: comply with 0.2 N.m mechanical strength test.
- Lens: Mitsubishi PMMA lens, kafuter glue, designed for 20 years using.
- PHILIPS driver, flicker free, DALI and 0-10V dimmable driver for your choice.
- ENEC - CE - ERP approval from TÜV Rheinland.
- Installation: recessed luminaire, spring fastener installation, ceiling mounting frame installation, suspending bracket installation.
- Application: shopping mall, hotel, office, school, train station, airport, etc.

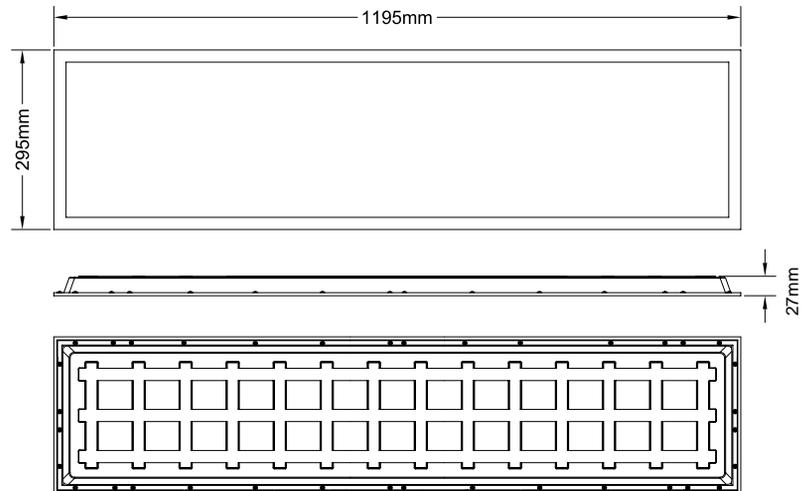

Specification | Technical & Product Data:

LED TYPE	SMD 2835
Wattage	22 W / 26W / 30 W
Frequency	50-60 HZ
Power Factor	>0.9
Light color	Natural white
Color Temperature	4000 K
SDCM	< 3
Light efficiency	typ. 160 lm/W
Luminous flux	typ. 3520 lm / 4160 lm / 4800 lm
CRI	>80
UGR	<19
Size	295 * 1195 * 27 mm
Lifespan L80/B10	50000 hrs at 25 °C
IP rate	IP40
ON/Off cycles	>30000
Working conditions	-20 °C - 45 °C
Material	Iron + Aluminum + PS
Body Color	White
Certification	ENEC CE ERP RoHS
Type of light source	C
Warranty	3 / 5 Years



LED Driver

Driver	PHILIPS CertaDrive
Input Voltage	220-240 V~
Output Voltage	30-40 V DC

