
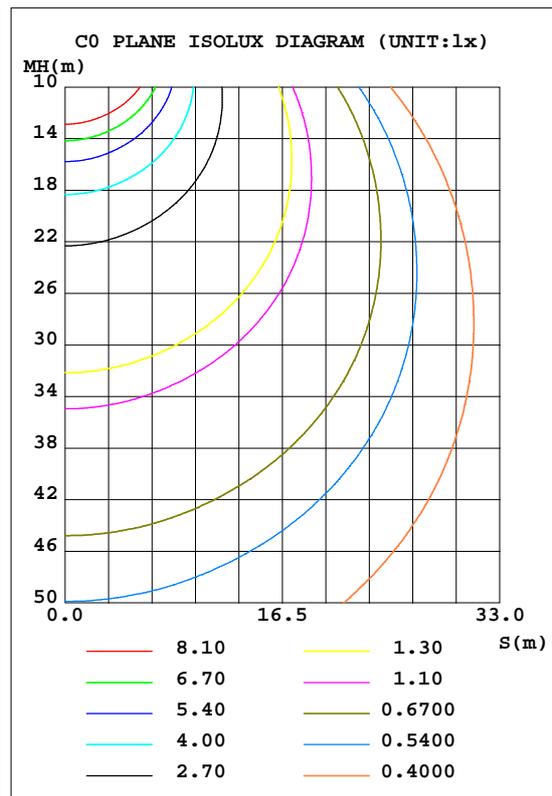


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.7V I:0.1640A P:36.30W PF:0.9650 Lamp Flux:5502.9x1 lm		
NAME: BF-12-36C1-3CCT 1 3500K	TYPE:	WEIGHT:
SPEC.:	DIM.: 1.15*0.142*0.053	SERIAL No.:
MFR.:	SUR.:1.15*0.142	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 151.60 lm/W			
MODBE-12-36C1-3CCT 1 3500K		I <sub>max</sub> (cd)	1342	S/MH(C0/180)	1.37
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	5502.9	h UP, DN(C0-180)	6.1, 43.8
NOMINAL FLUX(lm)	5502.9	CIE CLASS	SEMI-D.	h UP, DN(C180-360)	6.2, 43.9
LAMPS INSIDE	1	h up(%)	12.3	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	229.9	h down(%)	87.7	CIBSE SHR MAX	1.55

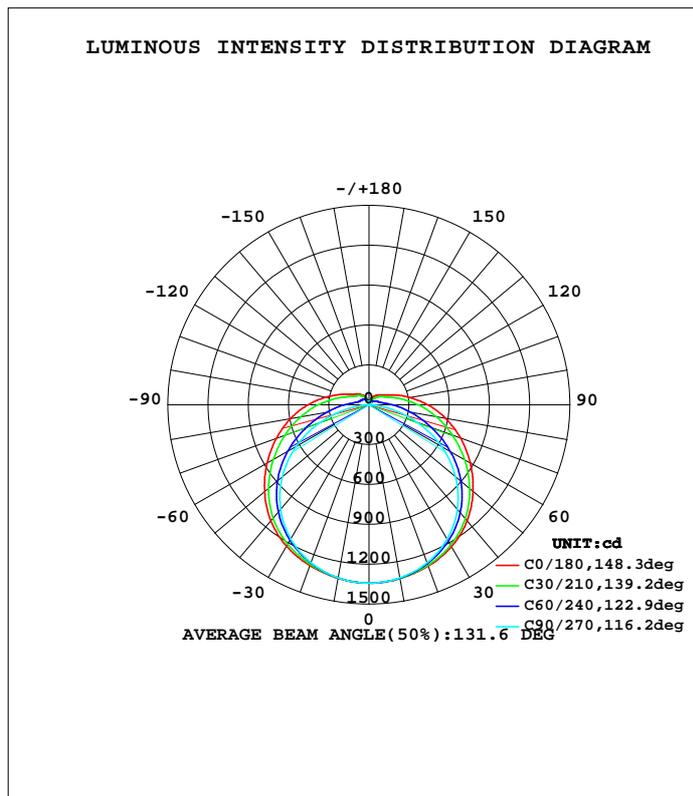

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:24.6DEG  
 Operators:  
 Test Date:2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity:46.0%  
 Test Distance:9.960m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1328	1326	1323	1322	1326	1323	1323	1325	0- 10	127.2	127.2	2.31,2.31
20	1292	1278	1266	1270	1288	1272	1265	1276	10- 20	368.5	495.7	9.01,9.01
30	1233	1203	1167	1189	1230	1194	1167	1197	20- 30	572.5	1068	19.4,19.4
40	1140	1091	1026	1074	1140	1084	1026	1083	30- 40	716.4	1785	32.4,32.4
50	1014	942.8	843.9	922.7	1017	936.2	845.7	930.0	40- 50	779.8	2564	46.6,46.6
60	873.4	764.9	625.4	745.0	878.7	763.5	628.0	749.7	50- 60	755.0	3319	60.3,60.3
70	726.3	585.2	380.5	566.5	735.3	586.9	384.5	567.9	60- 70	653.6	3973	72.2,72.2
80	579.2	420.5	136.9	406.7	592.2	426.3	140.7	404.8	70- 80	503.3	4476	81.3,81.3
90	439.2	281.7	1.085	273.6	455.7	290.5	2.693	269.8	80- 90	347.3	4824	87.7,87.7
100	315.1	180.3	2.935	178.2	331.1	189.4	3.041	172.8	90-100	230.2	5054	91.8,91.8
110	217.4	121.2	6.120	123.2	230.1	128.2	6.803	115.8	100-110	153.1	5207	94.6,94.6
120	152.6	89.23	9.652	100.5	163.2	102.8	11.14	83.77	110-120	104.1	5311	96.5,96.5
130	119.2	66.52	12.56	86.47	127.3	88.29	15.20	62.75	120-130	73.79	5385	97.9,97.9
140	95.64	49.63	14.97	72.61	102.8	74.16	18.54	47.66	130-140	52.01	5437	98.8,98.8
150	73.78	36.31	19.36	58.80	80.20	60.02	22.35	35.27	140-150	34.12	5471	99.4,99.4
160	53.20	27.70	24.00	44.94	56.49	45.89	25.33	28.09	150-160	19.84	5491	99.8,99.8
170	33.86	24.43	27.45	32.97	36.28	33.34	27.43	24.59	160-170	9.391	5500	100,100
180	28.69	27.98	28.49	27.70	28.73	27.97	28.49	27.68	170-180	2.651	5503	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:24.6DEG  
 Operators:  
 Test Date:2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity:46.0%  
 Test Distance:9.960m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.97	.97	.97	.91	.91	.91	.88
1.0	.98	.93	.88	.94	.90	.85	.88	.84	.80	.82	.78	.76	.76	.74	.71	.68
2.0	.84	.76	.70	.81	.74	.68	.75	.69	.64	.70	.65	.61	.65	.61	.58	.55
3.0	.73	.64	.57	.70	.62	.56	.65	.59	.53	.61	.55	.50	.57	.52	.48	.45
4.0	.64	.55	.47	.62	.53	.46	.58	.50	.44	.54	.48	.43	.50	.45	.41	.38
5.0	.57	.47	.40	.55	.46	.40	.51	.44	.38	.48	.42	.36	.45	.39	.35	.32
6.0	.51	.42	.35	.49	.41	.34	.46	.39	.33	.43	.37	.32	.41	.35	.30	.28
7.0	.46	.37	.31	.45	.36	.30	.42	.34	.29	.39	.33	.28	.37	.31	.27	.25
8.0	.42	.33	.27	.41	.32	.27	.38	.31	.26	.36	.30	.25	.34	.28	.24	.22
9.0	.38	.30	.24	.37	.29	.24	.35	.28	.23	.33	.27	.22	.31	.26	.21	.19
10.0	.35	.27	.22	.34	.27	.21	.32	.25	.21	.31	.24	.20	.29	.23	.19	.18

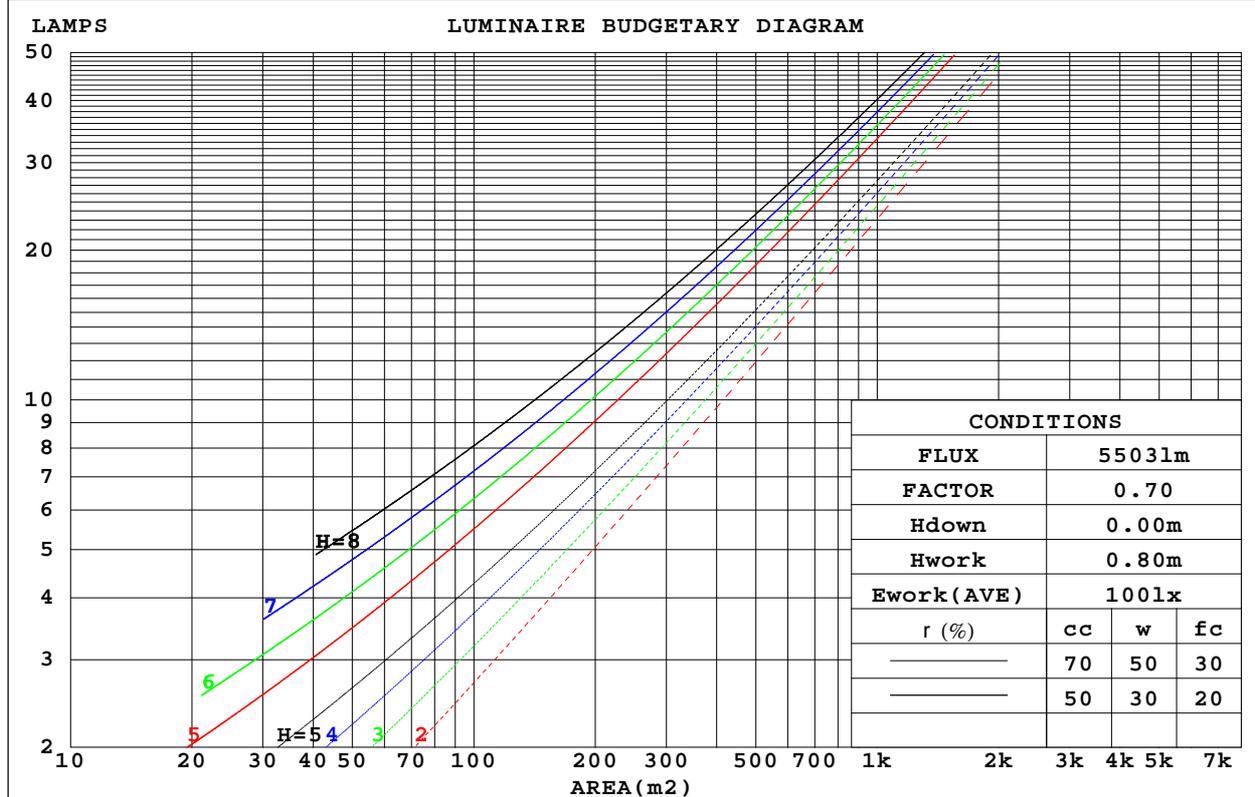

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 24.6DEG  
 Operators:  
 Test Date: 2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity: 46.0%  
 Test Distance: 9.960m [K=1.0000]  
 Remarks:

WEC AND CCEC

rcc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.371	.211	.067	.360	.205	.065	.339	.195	.062	.321	.185	.059	.303	.176	.057	
2.0	.326	.179	.055	.317	.174	.054	.298	.166	.051	.281	.158	.049	.265	.150	.047	
3.0	.292	.156	.047	.284	.152	.046	.267	.145	.044	.252	.138	.042	.237	.131	.041	
4.0	.265	.137	.040	.257	.134	.040	.242	.128	.038	.228	.122	.037	.215	.117	.036	
5.0	.241	.123	.036	.234	.120	.035	.220	.115	.034	.208	.110	.033	.196	.105	.031	
6.0	.222	.111	.032	.215	.109	.031	.203	.104	.030	.191	.099	.029	.180	.095	.028	
7.0	.205	.101	.029	.199	.099	.028	.188	.095	.027	.177	.091	.026	.167	.087	.026	
8.0	.190	.093	.026	.185	.091	.026	.174	.087	.025	.165	.083	.024	.156	.080	.023	
9.0	.177	.086	.024	.172	.084	.024	.163	.081	.023	.154	.077	.022	.146	.074	.021	
10.0	.166	.080	.022	.162	.078	.022	.153	.075	.021	.145	.072	.020	.137	.069	.020	

rcc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.285	.285	.285	.243	.243	.243	.166	.166	.166	.095	.095	.095	.030	.030	.030	
1.0	.279	.250	.224	.239	.215	.193	.164	.148	.134	.094	.086	.078	.030	.028	.025	
2.0	.272	.227	.189	.233	.196	.164	.160	.135	.114	.092	.079	.067	.030	.025	.022	
3.0	.265	.210	.167	.227	.182	.145	.156	.126	.102	.090	.074	.060	.029	.024	.020	
4.0	.257	.198	.152	.221	.171	.132	.152	.119	.093	.088	.070	.055	.028	.023	.018	
5.0	.249	.188	.142	.214	.162	.124	.148	.113	.087	.085	.067	.052	.028	.022	.017	
6.0	.242	.180	.135	.208	.156	.118	.143	.109	.083	.083	.064	.049	.027	.021	.016	
7.0	.235	.173	.130	.202	.150	.113	.140	.105	.080	.081	.062	.048	.026	.020	.016	
8.0	.228	.167	.126	.196	.145	.110	.136	.102	.078	.079	.060	.046	.026	.020	.015	
9.0	.222	.163	.122	.191	.141	.107	.132	.099	.076	.077	.059	.045	.025	.019	.015	
10.0	.216	.158	.120	.186	.138	.105	.129	.097	.074	.075	.057	.044	.024	.019	.015	

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:24.6DEG  
 Operators:  
 Test Date:2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity:46.0%  
 Test Distance:9.960m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.5	22.0	21.0	22.4	22.8	19.1	20.5	19.5	21.0	21.4
3H	23.0	24.3	23.4	24.7	25.2	20.6	21.9	21.0	22.3	22.8
4H	24.3	25.5	24.8	26.0	26.5	21.1	22.4	21.6	22.8	23.4
6H	25.7	26.9	26.2	27.4	27.9	21.5	22.7	22.0	23.1	23.7
8H	26.5	27.7	27.0	28.2	28.7	21.5	22.7	22.1	23.2	23.7
12H	27.4	28.5	27.9	29.0	29.6	21.6	22.7	22.1	23.2	23.7
4H 2H	21.1	22.4	21.6	22.8	23.3	20.0	21.3	20.5	21.8	22.3
3H	23.8	24.9	24.3	25.4	26.0	21.7	22.9	22.3	23.4	23.9
4H	25.3	26.3	25.8	26.8	27.4	22.5	23.5	23.0	24.0	24.6
6H	27.0	27.9	27.5	28.4	29.1	23.0	23.9	23.5	24.4	25.1
8H	27.9	28.7	28.5	29.3	29.9	23.1	24.0	23.7	24.5	25.2
12H	28.9	29.7	29.5	30.3	31.0	23.2	24.0	23.8	24.6	25.2
8H 4H	25.6	26.5	26.2	27.0	27.7	23.3	24.1	23.9	24.7	25.4
6H	27.6	28.3	28.2	28.9	29.6	24.1	24.9	24.8	25.5	26.2
8H	28.7	29.3	29.3	30.0	30.7	24.5	25.1	25.1	25.7	26.4
12H	30.0	30.6	30.7	31.2	32.0	24.7	25.3	25.3	25.9	26.6
12H 4H	25.6	26.4	26.2	27.0	27.7	23.6	24.3	24.2	24.9	25.6
6H	27.7	28.3	28.3	28.9	29.7	24.6	25.2	25.2	25.9	26.6
8H	28.9	29.5	29.6	30.1	30.8	25.1	25.7	25.8	26.3	27.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 5503 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.9)

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:24.6DEG  
 Operators:  
 Test Date:2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity:46.0%  
 Test Distance:9.960m [K=1.0000]  
 Remarks:

## UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	50	38	31	49	37	30	47	37	30	23
0.80	60	47	39	58	46	39	56	45	38	30
1.00	67	55	47	66	54	46	63	55	45	37
1.25	74	62	54	72	61	53	69	59	52	43
1.50	80	68	60	77	66	59	73	64	57	47
2.00	87	76	68	84	74	67	79	71	65	54
2.50	91	81	74	88	79	72	83	75	70	58
3.00	95	86	79	92	84	77	86	79	74	62
4.00	99	92	86	96	89	84	90	84	80	67
5.00	102	96	90	99	93	88	92	87	83	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 24.6DEG  
 Operators:  
 Test Date: 2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity: 46.0%  
 Test Distance: 9.960m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Conical surface Flux(90deg):

2172.1 lm

%lum = 39.5%


%lamp = 39.5%

Conical surface Flux(120deg):

3319.4 lm

%lum = 60.3%


%lamp = 60.3%

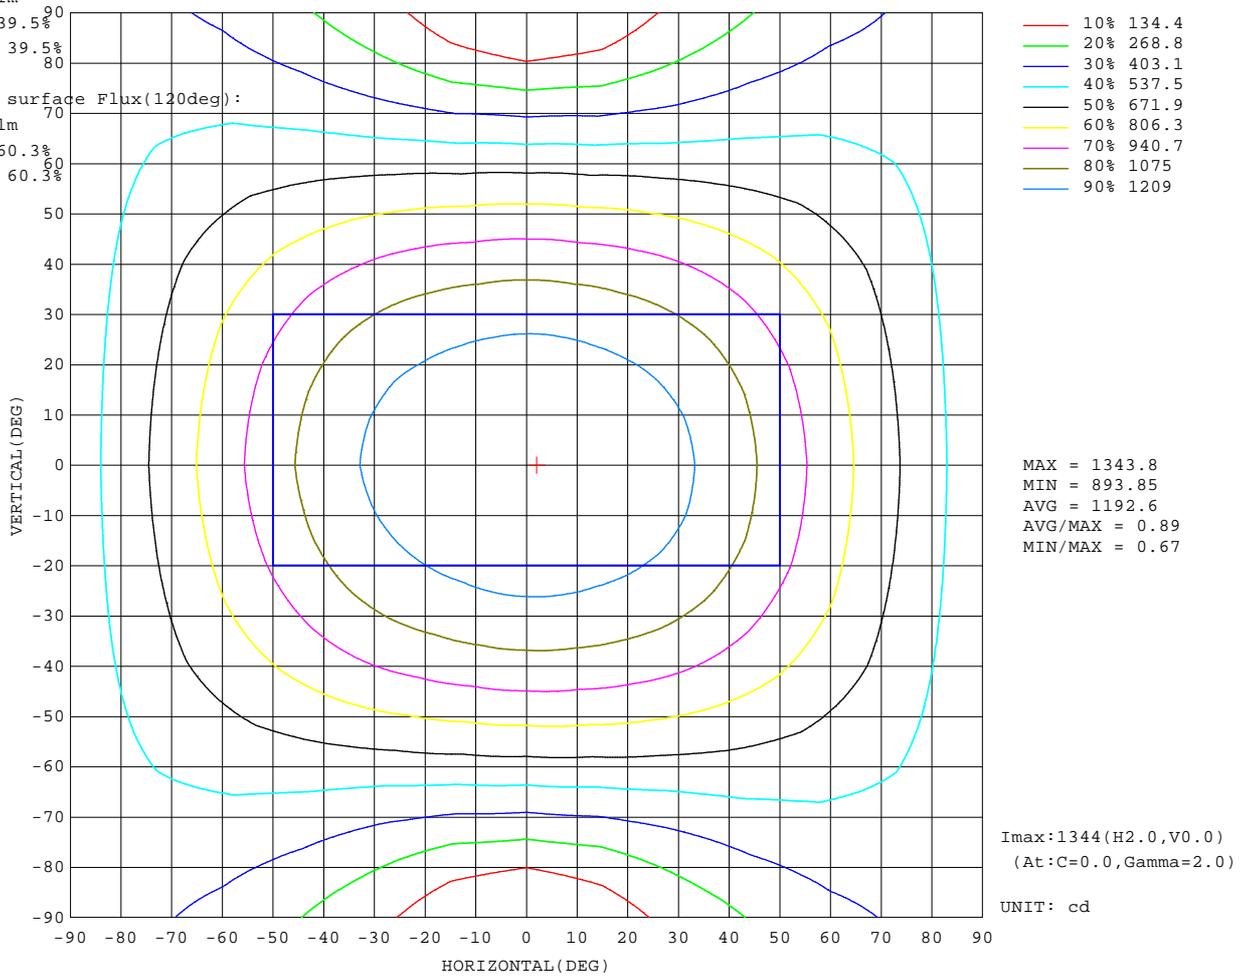

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:24.6DEG  
 Operators:  
 Test Date:2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity:46.0%  
 Test Distance:9.960m [K=1.0000]  
 Remarks:

AAI Figure

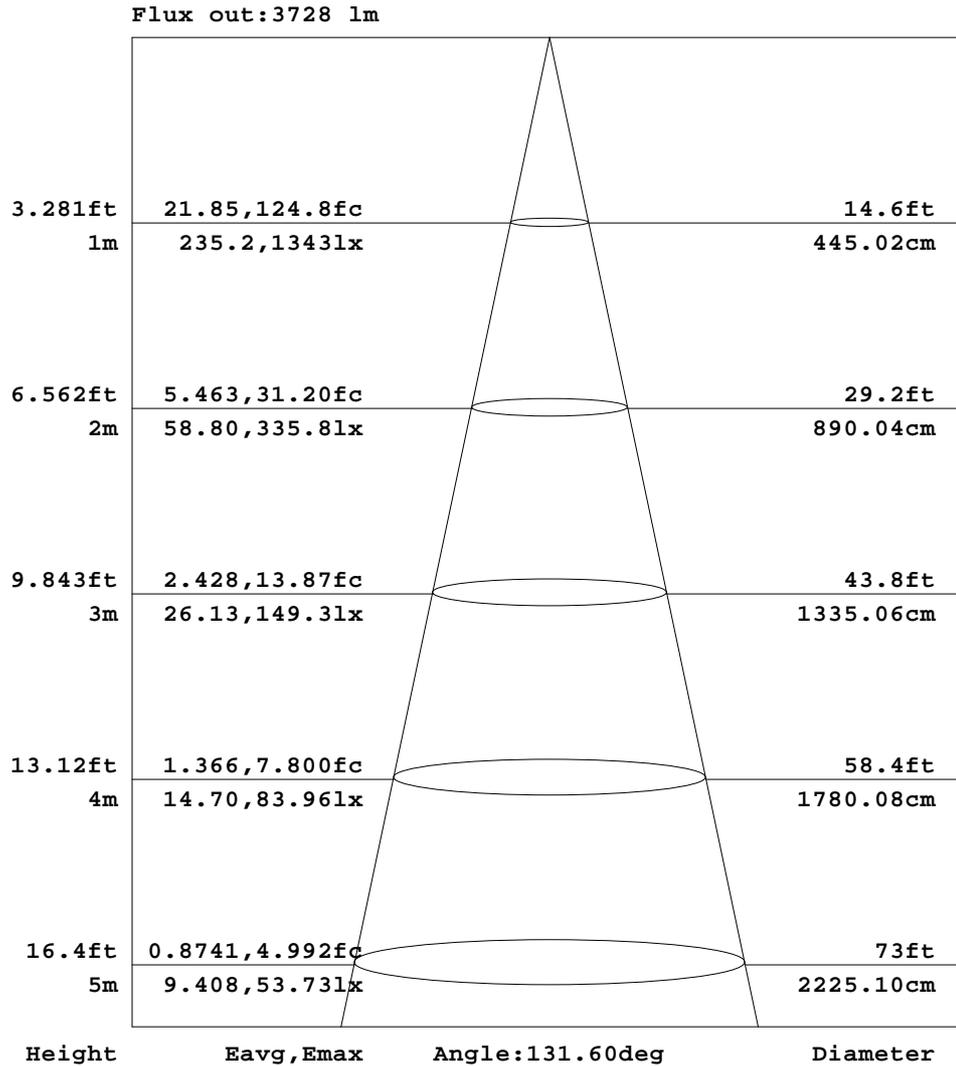


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:24.6DEG  
 Operators:  
 Test Date:2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity:46.0%  
 Test Distance:9.960m [K=1.0000]  
 Remarks:


ISOLUX DIAGRAM

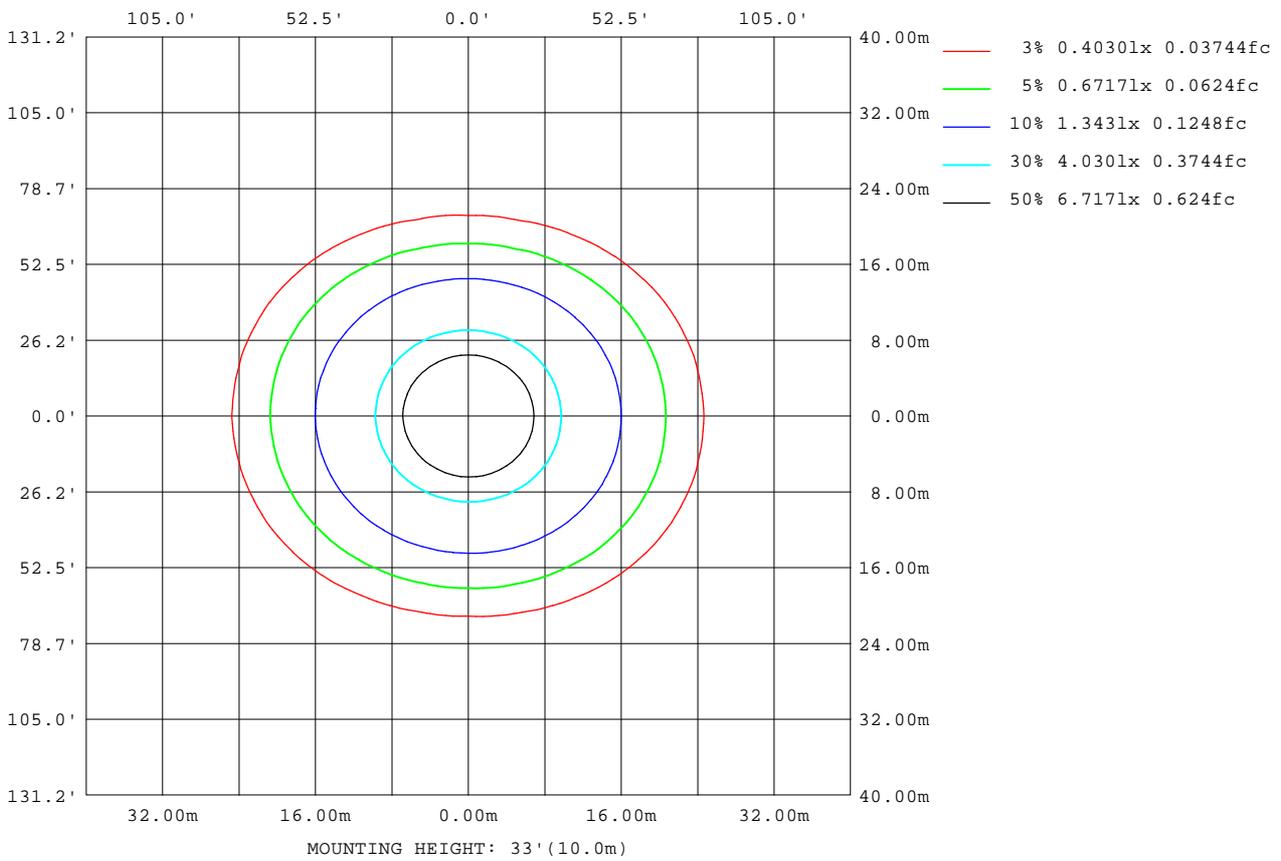

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 24.6DEG  
 Operators:  
 Test Date: 2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity: 46.0%  
 Test Distance: 9.960m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

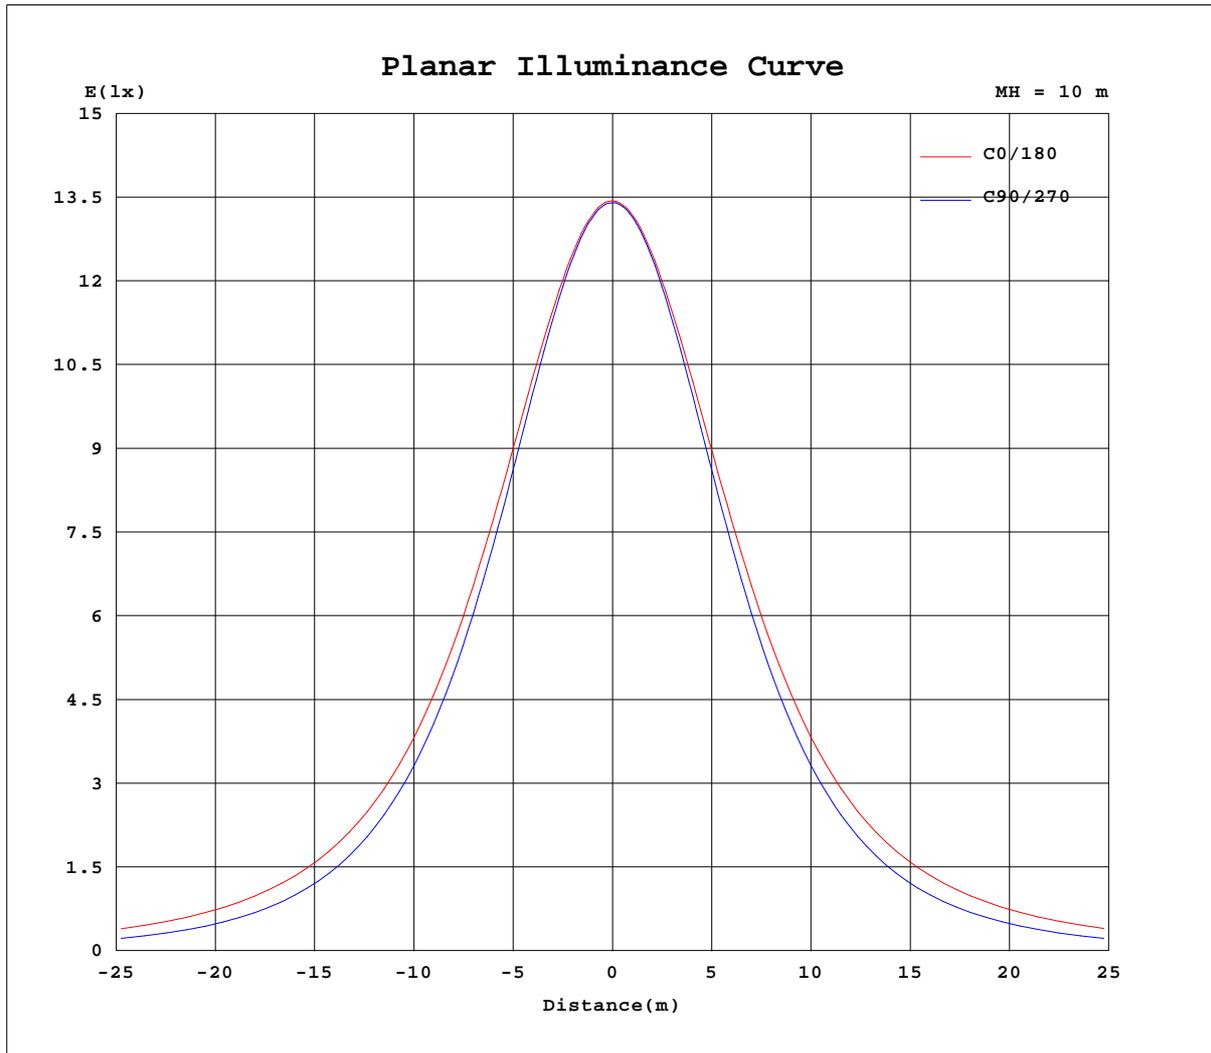

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 24.6DEG  
 Operators:  
 Test Date: 2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity: 46.0%  
 Test Distance: 9.960m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) g (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341	1341
5	1339	1337	1338	1338	1338	1338	1337	1336	1336	1336	1337	1337	1338	1338	1336	1337	1337	1336	1337
10	1328	1328	1327	1326	1325	1324	1323	1322	1322	1322	1324	1324	1326	1325	1324	1323	1323	1322	1323
15	1312	1311	1308	1307	1304	1301	1299	1299	1299	1300	1302	1306	1309	1307	1305	1301	1300	1299	1299
20	1292	1291	1285	1278	1273	1268	1266	1265	1265	1270	1277	1283	1288	1285	1280	1272	1268	1265	1265
25	1266	1264	1257	1245	1232	1226	1222	1220	1223	1233	1245	1255	1262	1258	1249	1237	1227	1222	1221
30	1233	1231	1219	1203	1185	1174	1167	1166	1172	1189	1206	1220	1230	1224	1213	1194	1178	1168	1167
35	1191	1189	1174	1152	1127	1109	1102	1102	1112	1136	1159	1177	1190	1184	1167	1143	1120	1104	1102
40	1140	1136	1119	1091	1060	1036	1026	1026	1043	1074	1103	1126	1140	1132	1113	1084	1053	1030	1026
45	1080	1076	1055	1022	983	952	940	941	965	1002	1037	1065	1082	1073	1050	1015	977	946	941
50	1014	1008	981	943	897	859	844	848	877	923	964	998	1017	1007	979	936	892	854	846
55	944	936	903	856	803	758	738	746	783	835	886	926	949	936	902	852	799	754	741
60	873	863	824	765	701	648	625	636	682	745	806	854	879	865	824	763	700	646	628
65	799	787	742	674	596	533	505	521	577	655	727	781	807	792	746	674	598	532	509
70	726	712	662	585	493	416	381	404	475	567	648	707	735	718	667	587	497	416	385
75	652	638	582	500	397	299	255	287	380	484	571	634	664	645	591	504	403	303	258
80	579	564	507	421	311	198	137	185	295	407	498	563	592	573	516	426	316	203	141
85	508	492	436	348	237	119	42.9	108	224	336	429	493	523	503	446	355	243	124	45.8
90	439	424	368	282	176	67.3	1.08	59.3	166	274	365	427	456	436	380	290	183	71.8	2.69
95	374	360	307	226	130	41.7	1.66	37.4	124	221	306	365	391	373	317	235	137	45.3	1.91
100	315	299	253	180	99.2	34.5	2.94	32.5	96.1	178	254	306	331	315	263	189	105	37.4	3.04
105	262	248	207	146	81.6	33.9	4.49	32.8	81.0	146	210	256	276	262	217	153	87.0	36.9	4.89
110	217	205	170	121	72.1	32.8	6.12	33.3	74.3	123	175	213	230	218	180	128	78.3	37.1	6.80
115	181	171	143	106	63.3	29.7	7.96	33.7	70.9	109	148	179	192	182	152	112	74.2	37.1	8.98
120	153	145	125	89.2	55.8	27.3	9.65	33.7	67.6	101	130	153	163	155	132	103	70.6	36.9	11.1
125	133	128	112	77.2	49.1	25.2	11.2	33.6	64.2	93.5	118	135	142	136	119	95.4	66.8	36.4	13.2
130	119	115	95.3	66.5	43.5	23.4	12.6	33.1	60.6	86.5	107	121	127	122	109	88.3	63.0	35.7	15.2
135	107	104	80.7	57.5	38.6	21.6	13.7	32.3	56.7	79.6	97.7	110	115	111	99.0	81.2	59.0	34.7	16.9
140	95.6	92.6	68.0	49.6	34.2	20.1	15.0	31.4	52.8	72.6	88.3	98.5	103	99.2	89.7	74.2	54.8	33.5	18.5
145	84.5	82.0	57.2	42.6	30.1	19.4	17.1	30.6	48.7	65.7	78.9	87.6	91.3	88.2	80.2	67.1	50.5	32.3	20.5
150	73.8	70.1	47.5	36.3	27.5	20.1	19.4	29.6	44.5	58.8	69.8	76.9	80.2	77.6	71.0	60.0	46.1	30.9	22.3
155	63.4	55.6	39.1	30.7	26.1	21.1	21.7	29.3	40.2	51.8	60.8	66.5	69.4	67.0	62.0	53.0	41.7	30.1	24.0
160	53.2	42.0	31.6	27.7	24.6	22.4	24.0	29.2	36.1	44.9	51.9	56.2	56.5	56.1	52.5	45.9	37.1	29.7	25.3
165	43.2	31.6	24.8	25.0	24.4	23.7	26.0	29.0	32.7	38.1	43.2	46.1	46.0	46.2	43.7	38.4	33.4	29.3	26.5
170	33.9	23.2	21.9	24.4	25.0	25.2	27.5	29.0	30.8	33.0	34.9	36.1	36.3	36.6	35.6	33.3	31.1	29.0	27.4
175	27.2	20.7	23.2	25.3	26.1	26.6	28.3	28.9	29.3	29.8	30.2	29.3	29.1	29.3	30.0	30.0	29.5	28.9	28.1
180	28.7	23.8	26.7	28.0	28.6	28.7	28.5	28.5	28.2	27.7	26.8	24.0	28.7	23.7	26.7	28.0	28.6	28.6	28.5

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:24.6DEG  
 Operators:  
 Test Date:2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity:46.0%  
 Test Distance:9.960m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--2

UNIT: cd

C(DEG) g (DEG)	285	300	315	330	345														
0	1341	1341	1341	1341	1341														
5	1337	1337	1338	1339	1339														
10	1323	1324	1325	1327	1328														
15	1299	1302	1304	1308	1311														
20	1266	1270	1276	1284	1290														
25	1223	1229	1240	1254	1264														
30	1169	1179	1197	1216	1229														
35	1104	1120	1145	1169	1187														
40	1030	1051	1083	1114	1135														
45	944	974	1011	1048	1073														
50	851	886	930	974	1005														
55	749	791	842	895	932														
60	639	689	750	813	858														
65	524	582	658	732	783														
70	405	478	568	652	707														
75	288	381	483	573	633														
80	185	294	405	498	559														
85	105	221	333	427	488														
90	56.0	163	270	361	420														
95	34.3	120	217	299	357														
100	29.6	91.7	173	247	299														
105	28.5	73.2	139	203	248														
110	28.5	67.3	116	168	205														
115	26.1	59.0	97.9	142	170														
120	24.2	51.6	83.8	122	145														
125	22.8	45.9	73.1	106	128														
130	21.5	41.2	62.8	88.8	115														
135	20.0	36.7	54.6	75.9	103														
140	18.7	32.6	47.7	65.7	90.6														
145	18.7	29.0	41.4	54.6	76.5														
150	19.8	27.1	35.3	45.3	64.1														
155	21.0	25.8	30.4	38.5	50.4														
160	22.4	24.6	28.1	31.1	38.3														
165	23.7	24.4	25.4	25.1	30.7														
170	25.0	24.9	24.6	22.8	23.2														
175	26.5	25.9	25.2	23.7	20.9														
180	28.4	28.2	27.7	26.7	24.1														

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:24.6DEG  
 Operators:  
 Test Date:2024-07-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.286  
 Humidity:46.0%  
 Test Distance:9.960m [K=1.0000]  
 Remarks: