


## LED PANEL LIGHT


### BP-6060-40U1-3CCT

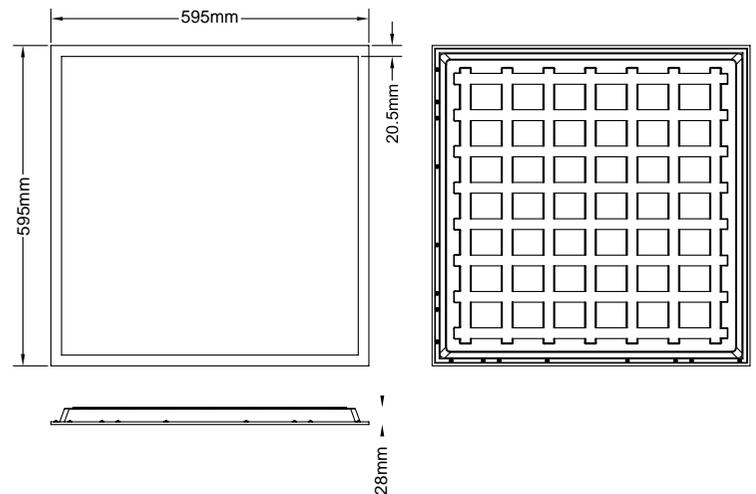

- UGR<19,CRI>90
- Backplane: 0.25mm iron plate.
- Frame: Thickened iron frame, seamless welding.
- Diffuser: comply with 0.2 N.m mechanical strength test.
- Lens: Mitsubishi PMMA lens, kafuter glue, designed for 20 years using.
- CCT and wattage adjustable
- ENEC – CE - ERP
- Installation: recessed luminaire, spring fastener installation, ceiling mounting frame installation, suspending bracket installation.
- Application: shopping mall, hotel, office, school, train station, airport, etc.

#### Specification | Technical & Product Data:

LED TYPE	SMD 2835
Wattage	28W-32W-36W-40W
Frequency	50-60 HZ
Power Factor	>0.9
Light color	Warm/Natural/Cool white
Color Temperature	3000 K / 4000 K / 5000 K
SDCM	<6
Light efficiency	typ. 120 lm/W
Luminous flux	typ. 3360lm-3840lm-4320lm-4800lm
CRI	>90
UGR	<19
Size	595 * 595 * 28 mm
Lifespan L80/B10	50000 hrs at 25 °C
IP rate	IP40
ON/O ffcycles	>30000
Working conditions	-20 °C - 45 °C
Material	Iron + Aluminum + PS
Body Color	White
Certification	ENEC CE ERP RoHS
Type of light source	<b>F</b>
Warranty	3 / 5 Years

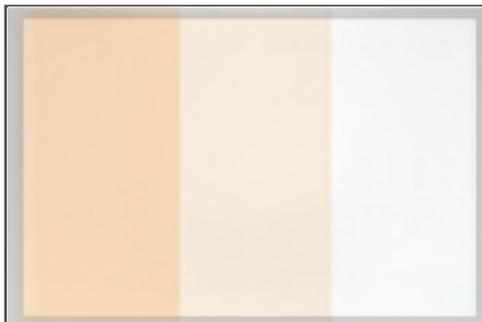

CCT adjustable

3000K 4000K 5000K

Warm White White Cold White

