
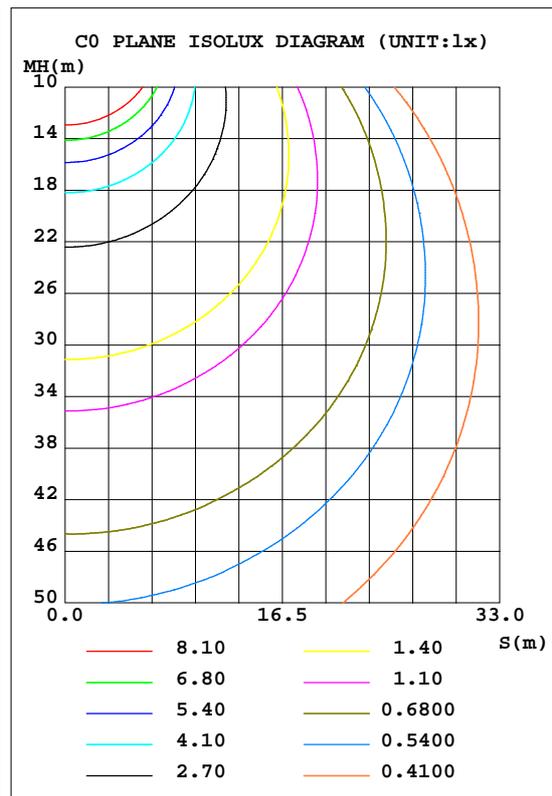


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.6V I:0.1670A P:37.20W PF:0.9660 Lamp Flux:5424.5x1 lm		
NAME: BF-12-36C1-3CCT 1	TYPE:	WEIGHT:
SPEC.:	DIM.: 1.15*0.142*0.053	SERIAL No.:
MFR.:	SUR.:1.15*0.142	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 145.82 lm/W			
MODEL	BF-12-36C1-3CCT 1	I _{max} (cd)	1353	S/MH(C0/180)	1.34
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	5424.5	h UP, DN(C0-180)	5.6, 44.6
NOMINAL FLUX(lm)	5424.5	CIE CLASS	SEMI-D.	h UP, DN(C180-360)	5.5, 44.3
LAMPS INSIDE	1	h up(%)	11.1	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	229.9	h down(%)	88.9	CIBSE SHR MAX	1.55

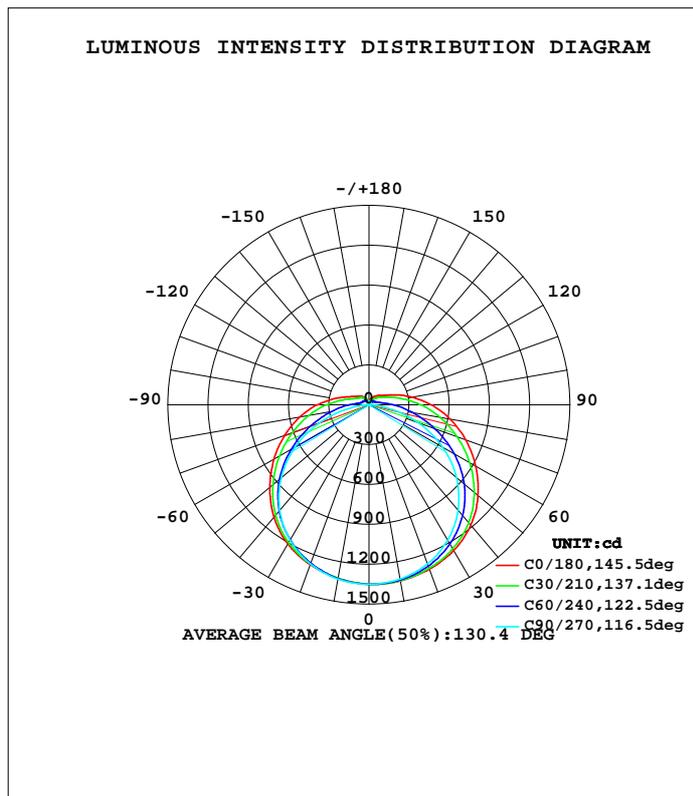

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1346	1342	1332	1324	1325	1325	1332	1342	0- 10	128.1	128.1	2.36,2.36
20	1317	1301	1274	1267	1281	1272	1275	1301	10- 20	371.3	499.4	9.21,9.21
30	1266	1231	1176	1178	1210	1185	1177	1228	20- 30	577.0	1076	19.8,19.8
40	1182	1125	1035	1052	1104	1062	1037	1120	30- 40	721.6	1798	33.1,33.1
50	1062	982.1	852.6	888.3	967.1	901.3	855.1	976.0	40- 50	784.5	2582	47.6,47.6
60	919.0	804.8	633.4	702.2	819.3	718.1	636.7	796.5	50- 60	757.5	3340	61.6,61.6
70	767.3	617.2	386.8	520.9	669.3	536.8	389.6	607.9	60- 70	651.7	3992	73.6,73.6
80	613.6	443.3	140.4	359.2	522.5	373.7	141.8	434.8	70- 80	495.7	4487	82.7,82.7
90	465.4	294.4	0.9436	227.8	385.7	239.7	1.721	289.5	80- 90	334.3	4822	88.9,88.9
100	331.2	183.2	2.685	138.5	266.6	144.8	2.399	180.8	90-100	213.9	5036	92.8,92.8
110	222.0	114.8	5.361	94.01	178.5	96.17	5.535	110.6	100-110	136.5	5172	95.3,95.3
120	147.3	78.12	8.316	78.67	126.3	79.88	9.037	77.17	110-120	89.51	5262	97,97
130	109.8	59.41	10.80	67.58	101.5	68.66	12.29	59.55	120-130	62.42	5324	98.1,98.1
140	89.04	45.55	12.89	56.35	82.07	57.51	14.86	46.16	130-140	44.04	5368	99,99
150	70.14	34.55	16.78	45.00	63.50	46.04	18.39	35.24	140-150	29.05	5397	99.5,99.5
160	52.11	27.82	20.64	33.52	43.52	34.41	21.42	28.73	150-160	16.98	5414	99.8,99.8
170	34.78	23.42	23.75	26.47	27.95	26.72	23.68	23.82	160-170	8.133	5422	100,100
180	26.13	24.01	25.00	23.93	26.12	23.97	25.02	23.96	170-180	2.299	5425	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.05	1.05	1.05	.98	.98	.98	.92	.92	.92	.89
1.0	.98	.93	.88	.95	.90	.86	.88	.85	.81	.82	.79	.77	.77	.75	.72	.69
2.0	.84	.77	.70	.81	.74	.68	.76	.70	.65	.71	.66	.62	.66	.62	.59	.56
3.0	.73	.64	.57	.71	.63	.56	.66	.59	.54	.62	.56	.51	.58	.53	.49	.46
4.0	.64	.55	.48	.62	.54	.47	.58	.51	.45	.55	.48	.43	.51	.46	.41	.39
5.0	.57	.48	.41	.55	.47	.40	.52	.44	.38	.49	.42	.37	.46	.40	.36	.33
6.0	.51	.42	.35	.50	.41	.35	.47	.39	.33	.44	.37	.32	.41	.36	.31	.29
7.0	.46	.37	.31	.45	.36	.30	.42	.35	.29	.40	.33	.28	.38	.32	.27	.25
8.0	.42	.33	.27	.41	.33	.27	.39	.31	.26	.36	.30	.25	.34	.29	.24	.22
9.0	.38	.30	.24	.37	.29	.24	.35	.28	.23	.34	.27	.23	.32	.26	.22	.20
10.0	.35	.27	.22	.34	.27	.22	.33	.26	.21	.31	.25	.20	.29	.24	.20	.18

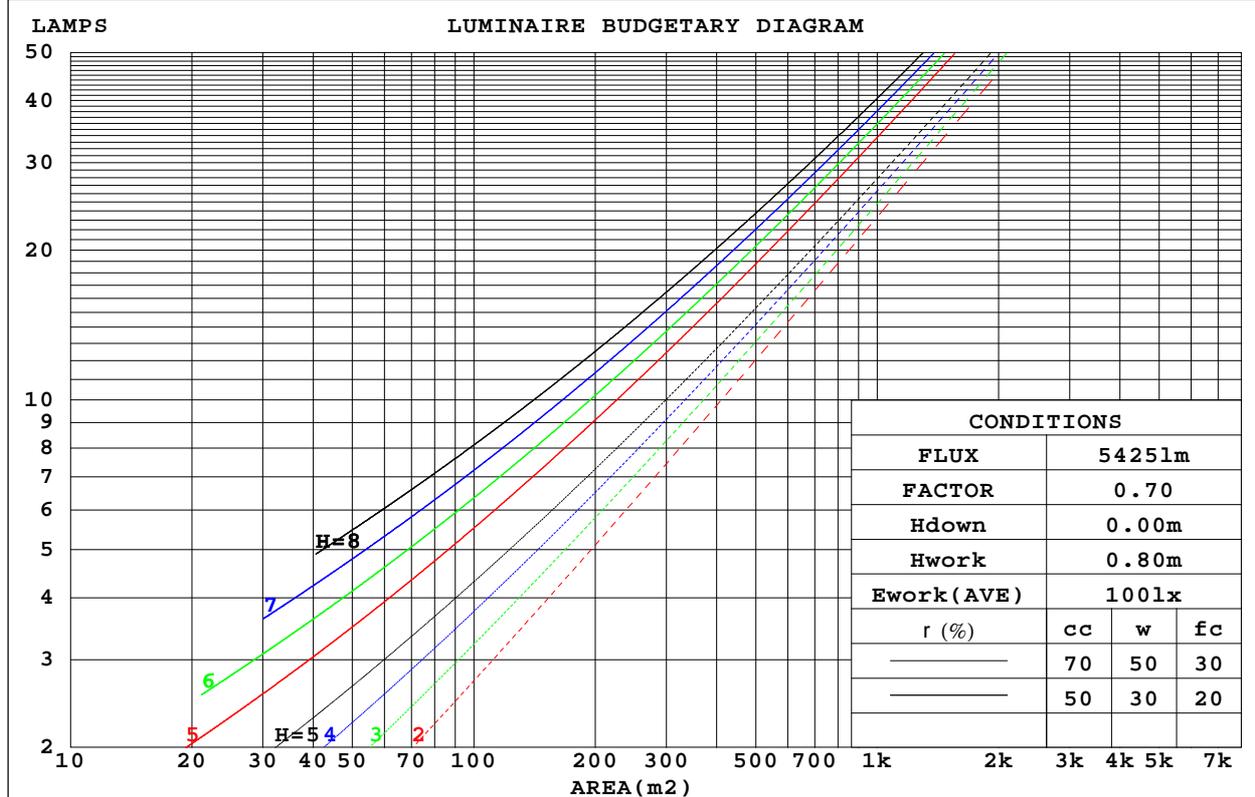

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

WEC AND CCEC

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.369	.210	.067	.359	.205	.065	.339	.194	.062	.321	.185	.059	.304	.176	.057	
2.0	.326	.179	.055	.316	.174	.054	.299	.166	.052	.282	.158	.050	.267	.151	.048	
3.0	.292	.156	.047	.284	.152	.046	.268	.145	.044	.253	.139	.042	.239	.132	.041	
4.0	.265	.137	.040	.257	.134	.040	.242	.129	.038	.229	.123	.037	.216	.118	.036	
5.0	.241	.123	.036	.234	.120	.035	.221	.115	.034	.209	.110	.033	.198	.106	.032	
6.0	.222	.111	.032	.215	.109	.031	.204	.104	.030	.193	.100	.029	.182	.096	.028	
7.0	.205	.101	.029	.199	.099	.028	.188	.095	.027	.178	.091	.027	.169	.088	.026	
8.0	.190	.093	.026	.185	.091	.026	.175	.088	.025	.166	.084	.024	.157	.081	.024	
9.0	.178	.086	.024	.173	.084	.024	.164	.081	.023	.155	.078	.022	.147	.075	.022	
10.0	.166	.080	.022	.162	.078	.022	.154	.075	.021	.146	.072	.021	.139	.070	.020	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.275	.275	.275	.235	.235	.235	.161	.161	.161	.092	.092	.092	.029	.029	.029	
1.0	.270	.241	.215	.231	.207	.185	.158	.142	.128	.091	.082	.074	.029	.027	.024	
2.0	.263	.218	.180	.225	.187	.155	.154	.130	.108	.089	.075	.064	.029	.024	.021	
3.0	.255	.201	.158	.219	.173	.137	.150	.120	.096	.087	.070	.056	.028	.023	.018	
4.0	.247	.188	.143	.212	.163	.124	.146	.113	.087	.084	.066	.052	.027	.022	.017	
5.0	.240	.178	.133	.206	.154	.115	.142	.108	.081	.082	.063	.048	.026	.021	.016	
6.0	.232	.170	.125	.200	.147	.109	.138	.103	.077	.080	.061	.046	.026	.020	.015	
7.0	.225	.163	.120	.194	.142	.105	.134	.099	.074	.078	.058	.044	.025	.019	.015	
8.0	.219	.158	.116	.188	.137	.101	.130	.096	.072	.076	.057	.043	.025	.019	.014	
9.0	.212	.153	.113	.183	.133	.098	.127	.093	.070	.074	.055	.042	.024	.018	.014	
10.0	.206	.149	.110	.178	.129	.096	.123	.091	.068	.072	.054	.041	.023	.018	.014	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.9	22.4	21.4	22.8	23.2	19.4	20.8	19.8	21.2	21.7
3H	23.4	24.7	23.9	25.2	25.6	20.9	22.2	21.3	22.7	23.1
4H	24.7	26.0	25.2	26.5	27.0	21.4	22.7	21.9	23.2	23.7
6H	26.2	27.4	26.7	27.9	28.4	21.8	23.0	22.3	23.5	24.0
8H	27.0	28.2	27.5	28.6	29.2	21.9	23.0	22.4	23.5	24.0
12H	27.9	29.0	28.4	29.5	30.1	21.9	23.0	22.4	23.5	24.1
4H 2H	21.5	22.8	22.0	23.2	23.7	20.4	21.7	20.9	22.1	22.6
3H	24.2	25.3	24.7	25.8	26.4	22.1	23.2	22.6	23.7	24.3
4H	25.8	26.8	26.3	27.3	27.9	22.8	23.9	23.4	24.4	25.0
6H	27.4	28.4	28.0	28.9	29.5	23.4	24.3	23.9	24.8	25.4
8H	28.4	29.2	28.9	29.8	30.4	23.5	24.4	24.1	24.9	25.5
12H	29.4	30.2	30.0	30.8	31.4	23.6	24.4	24.2	25.0	25.6
8H 4H	26.1	26.9	26.7	27.5	28.1	23.7	24.6	24.3	25.1	25.7
6H	28.0	28.8	28.7	29.4	30.0	24.6	25.3	25.2	25.9	26.5
8H	29.2	29.8	29.8	30.4	31.1	24.9	25.5	25.5	26.1	26.8
12H	30.5	31.1	31.1	31.7	32.4	25.1	25.7	25.8	26.3	27.0
12H 4H	26.1	26.9	26.7	27.5	28.1	24.0	24.8	24.6	25.3	26.0
6H	28.2	28.8	28.8	29.4	30.1	25.0	25.7	25.7	26.3	27.0
8H	29.4	30.0	30.0	30.6	31.3	25.5	26.1	26.2	26.7	27.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 5425 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.9)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	51	38	31	50	38	31	48	37	31	24
0.80	60	47	39	59	47	39	56	46	38	31
1.00	68	56	47	66	55	47	63	56	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	68	60	78	67	59	74	65	58	48
2.00	87	77	69	85	75	68	80	72	66	55
2.50	92	82	75	89	80	73	83	76	70	59
3.00	95	87	80	92	84	78	87	80	75	63
4.00	100	92	86	96	90	84	90	85	80	68
5.00	103	96	91	99	93	89	93	88	84	71
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Conical surface Flux(90deg):

2187.9 lm

%lum = 40.3%


%lamp = 40.3%

Conical surface Flux(120deg):

3339.9 lm

%lum = 61.6%


%lamp = 61.6%

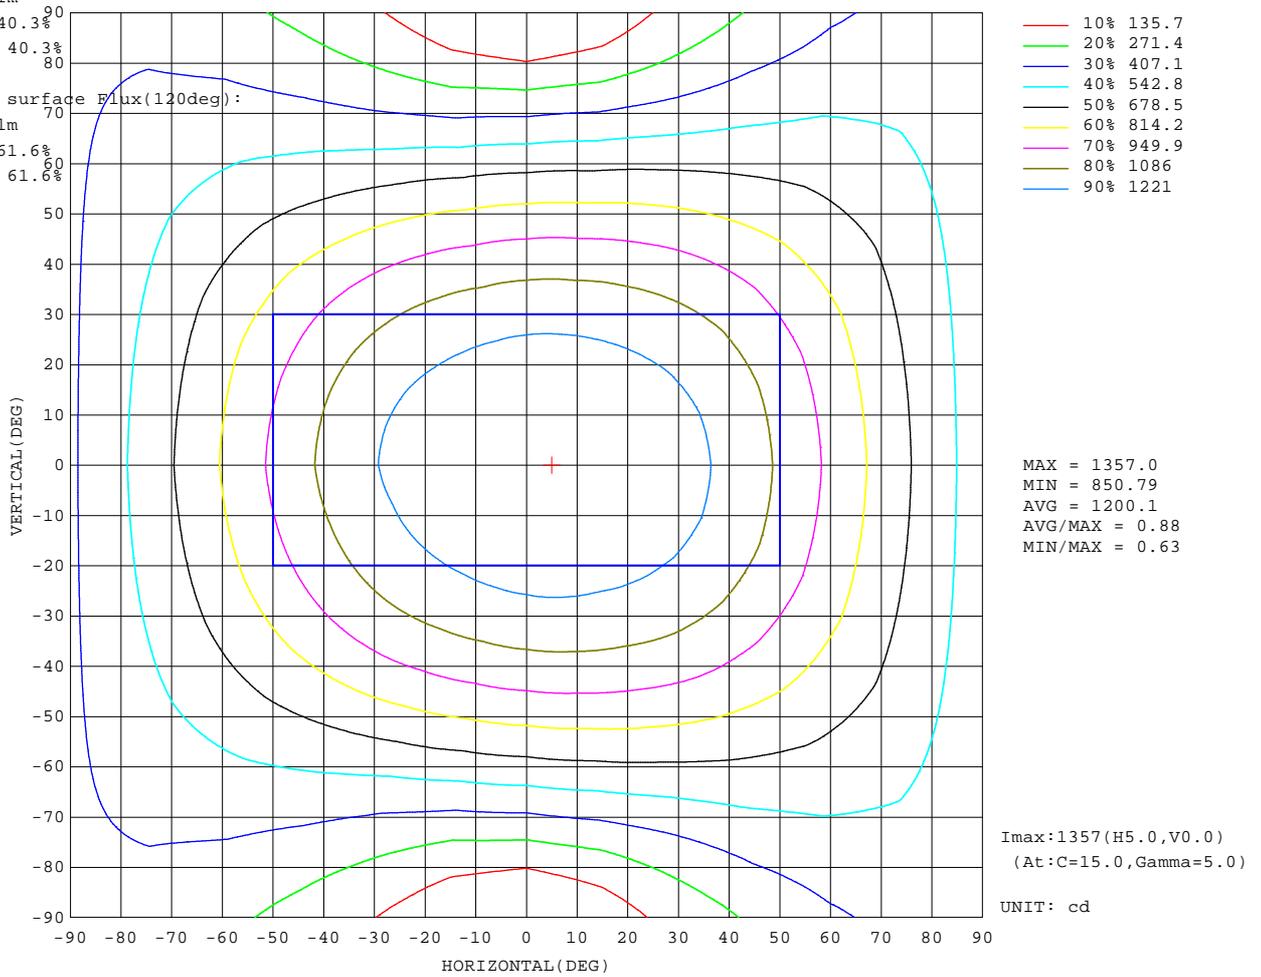

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

AAI Figure

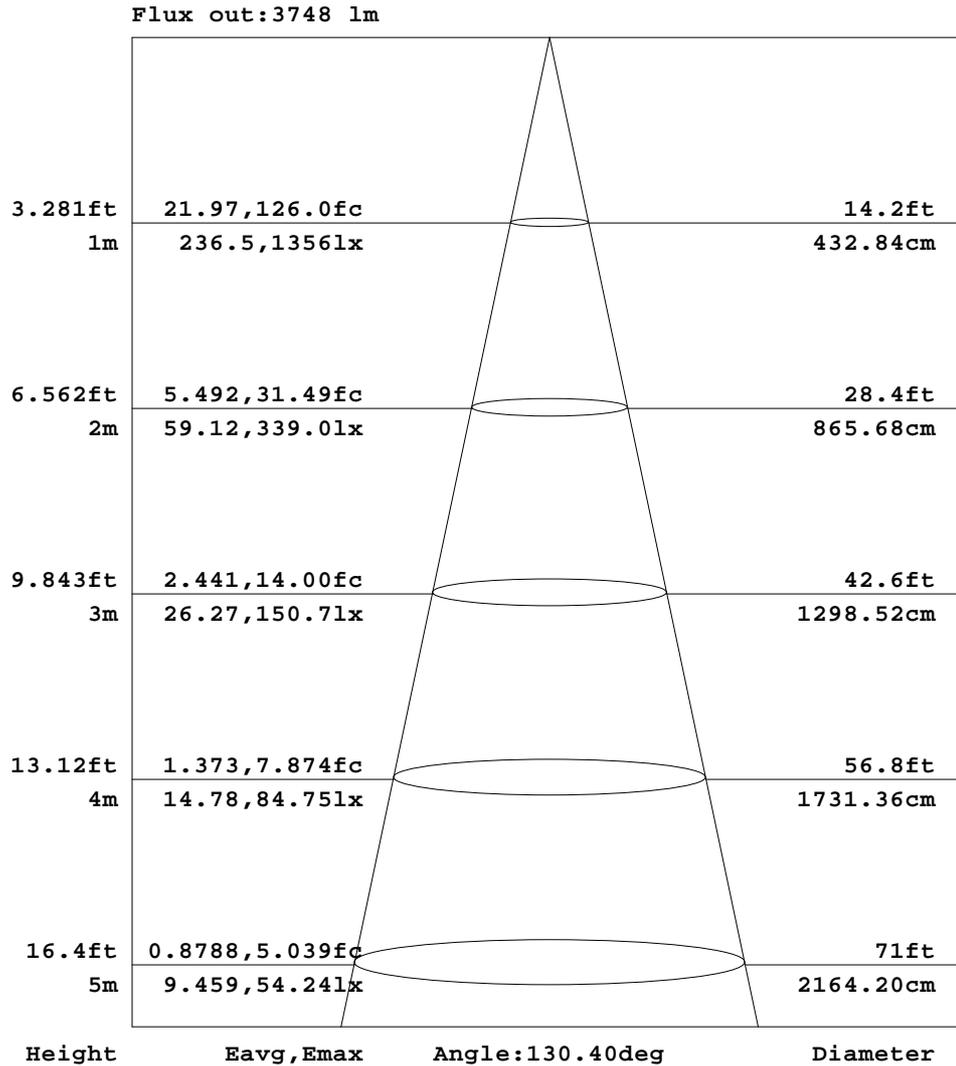


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:


ISOLUX DIAGRAM

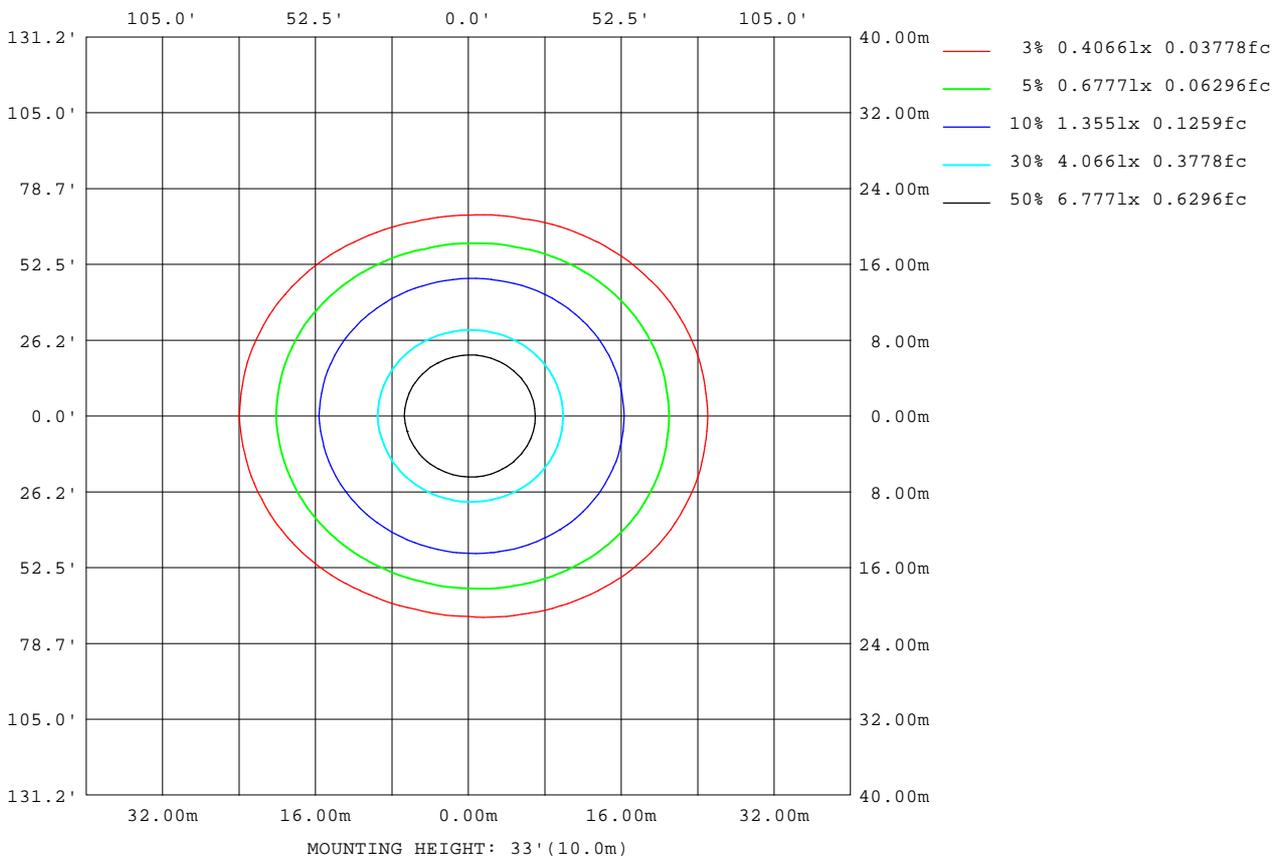

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

Planar Illuminance Curve

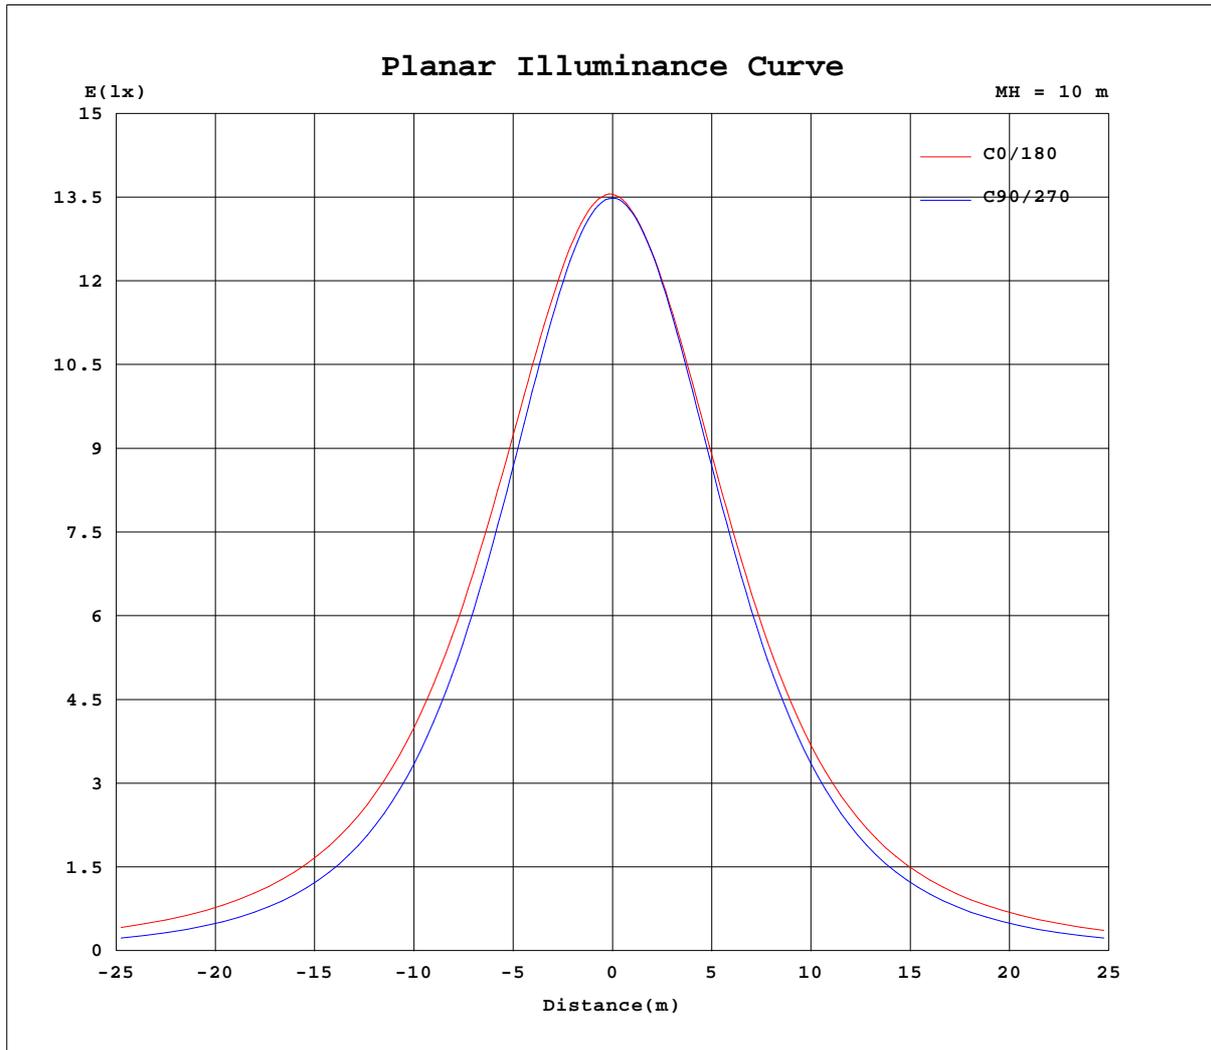

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) g (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350
5	1351	1353	1351	1349	1349	1348	1346	1343	1342	1341	1342	1341	1340	1341	1341	1342	1343	1344	1345
10	1346	1346	1344	1342	1339	1336	1332	1328	1326	1324	1324	1325	1325	1326	1326	1325	1327	1329	1332
15	1333	1334	1331	1326	1320	1314	1308	1303	1300	1300	1301	1304	1306	1306	1305	1301	1303	1304	1308
20	1317	1316	1310	1301	1292	1284	1274	1268	1265	1267	1272	1276	1281	1280	1276	1272	1268	1270	1275
25	1294	1293	1285	1270	1255	1242	1230	1222	1222	1228	1235	1243	1250	1247	1241	1232	1227	1225	1231
30	1266	1263	1250	1231	1208	1191	1176	1166	1169	1178	1191	1201	1210	1207	1198	1185	1175	1170	1177
35	1229	1226	1209	1183	1153	1129	1111	1100	1106	1120	1137	1149	1161	1158	1147	1129	1113	1104	1112
40	1182	1178	1159	1125	1088	1057	1035	1025	1033	1052	1072	1089	1104	1098	1084	1062	1042	1030	1037
45	1127	1121	1097	1060	1013	974	949	939	951	975	999	1020	1038	1031	1014	986	962	944	951
50	1062	1056	1025	982	928	882	853	844	859	888	920	948	967	957	936	901	872	850	855
55	992	984	949	897	835	781	747	740	759	796	837	871	893	883	854	811	774	746	750
60	919	909	866	805	734	672	633	628	654	702	753	794	819	807	771	718	670	636	637
65	844	831	782	710	627	556	512	511	548	610	671	717	744	730	688	626	564	519	516
70	767	753	698	617	520	437	387	392	444	521	590	641	669	653	607	537	461	400	390
75	690	675	616	528	419	316	260	274	350	437	511	566	595	577	529	452	366	285	261
80	614	597	536	443	327	209	140	173	265	359	438	493	523	504	453	374	279	184	142
85	539	521	459	366	248	124	44.5	97.3	194	288	368	424	452	434	383	303	207	106	45.5
90	465	448	387	294	182	67.9	0.94	50.0	138	228	305	359	386	368	316	240	148	56.5	1.72
95	396	379	321	233	131	38.7	1.55	29.5	98.0	178	249	297	322	306	257	187	106	33.3	1.58
100	331	314	262	183	95.7	29.6	2.69	25.5	73.8	139	201	245	267	252	208	145	78.5	27.9	2.40
105	273	257	211	143	74.6	29.1	4.12	25.3	62.2	111	161	200	218	205	167	115	64.7	27.5	3.97
110	222	208	169	115	62.9	27.9	5.36	25.4	57.8	94.0	133	163	179	167	136	96.2	59.6	27.4	5.54
115	180	169	137	94.9	54.6	26.1	6.88	25.3	55.1	84.6	113	136	148	139	115	85.8	56.7	27.2	7.31
120	147	139	116	78.1	48.7	24.5	8.32	25.1	52.3	78.7	101	118	126	120	103	79.9	53.9	26.9	9.04
125	125	119	101	67.9	43.6	23.1	9.61	24.7	49.4	73.2	92.8	106	112	107	93.7	74.3	50.9	26.4	10.7
130	110	106	85.4	59.4	39.2	22.0	10.8	24.1	46.4	67.6	84.8	96.5	101	97.2	85.8	68.7	47.9	25.7	12.3
135	99.0	95.7	72.9	52.0	35.4	20.8	11.8	23.4	43.3	62.0	77.1	87.2	91.6	87.9	78.0	63.0	44.7	24.8	13.6
140	89.0	86.2	62.1	45.6	31.9	19.7	12.9	23.1	40.0	56.3	69.4	78.0	82.1	78.7	70.5	57.5	41.4	24.1	14.9
145	79.4	77.1	52.9	39.8	28.7	19.6	14.9	22.7	36.6	50.7	61.8	69.0	72.7	69.8	63.0	51.8	38.0	23.7	16.7
150	70.1	65.5	44.7	34.6	27.0	20.1	16.8	22.9	33.2	45.0	54.3	60.3	63.5	61.0	55.4	46.0	34.4	23.5	18.4
155	61.0	52.1	37.3	29.7	26.3	20.5	18.7	23.1	30.0	39.3	46.8	51.5	53.3	52.3	48.0	40.3	30.8	23.5	20.0
160	52.1	40.4	30.7	27.8	25.3	21.2	20.6	23.5	27.5	33.5	39.4	42.9	43.5	43.7	40.5	34.4	28.2	23.6	21.4
165	43.4	31.2	24.8	25.7	23.9	22.1	22.4	23.9	26.2	29.2	32.4	34.5	34.4	35.1	33.2	29.7	26.5	23.9	22.7
170	34.8	23.2	21.7	23.4	23.4	23.0	23.8	24.4	25.2	26.5	27.6	27.6	28.0	27.9	27.9	26.7	25.3	24.2	23.7
175	27.5	18.5	21.1	23.1	23.7	23.9	24.7	24.8	24.7	24.7	24.5	22.8	22.6	22.8	24.6	24.9	24.8	24.7	24.5
180	26.1	19.0	22.5	24.0	24.9	25.1	25.0	24.9	24.7	23.9	22.7	19.3	26.1	19.0	22.5	24.0	24.9	25.0	25.0

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--2

UNIT: cd

C(DEG) g (DEG)	285	300	315	330	345														
0	1350	1350	1350	1350	1350														
5	1346	1350	1350	1351	1352														
10	1334	1339	1342	1345	1347														
15	1312	1320	1326	1332	1334														
20	1281	1292	1301	1310	1316														
25	1240	1254	1268	1284	1293														
30	1188	1207	1228	1250	1263														
35	1125	1150	1179	1209	1227														
40	1053	1084	1120	1157	1180														
45	969	1008	1053	1096	1122														
50	876	923	976	1025	1057														
55	775	829	890	948	984														
60	665	728	796	864	909														
65	549	621	701	780	832														
70	428	512	608	696	753														
75	309	410	518	614	676														
80	200	316	435	534	598														
85	114	238	358	458	522														
90	60.1	174	289	387	449														
95	33.9	125	230	320	380														
100	26.8	91.3	181	261	318														
105	26.5	68.1	140	211	260														
110	26.4	61.7	111	170	211														
115	24.7	53.6	91.0	138	172														
120	23.5	48.0	77.2	115	141														
125	22.5	43.3	67.4	95.5	120														
130	21.6	39.4	59.5	81.7	107														
135	20.6	35.5	52.4	71.9	94.7														
140	19.6	32.2	46.2	62.6	81.0														
145	19.5	29.1	40.7	53.6	72.5														
150	19.9	27.5	35.2	45.5	62.4														
155	20.4	26.7	30.7	38.4	50.0														
160	21.2	25.5	28.7	31.7	40.5														
165	22.1	24.0	26.4	25.9	31.6														
170	22.9	23.5	23.8	22.9	24.1														
175	23.8	23.6	23.1	21.7	19.2														
180	24.9	24.7	24.0	22.6	19.3														

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks: