



IP44

LED Batten Light

130lm/W

Easy wiring and installation

5 wires, series connection supportable



No.47,XiangYuan Rd, Hangzhou
Marktweg 31 D-47608 Geldern




+86-571-56017172
+49(0)2831 974 8080





info@holux.net
www.holux.net



| Product Details

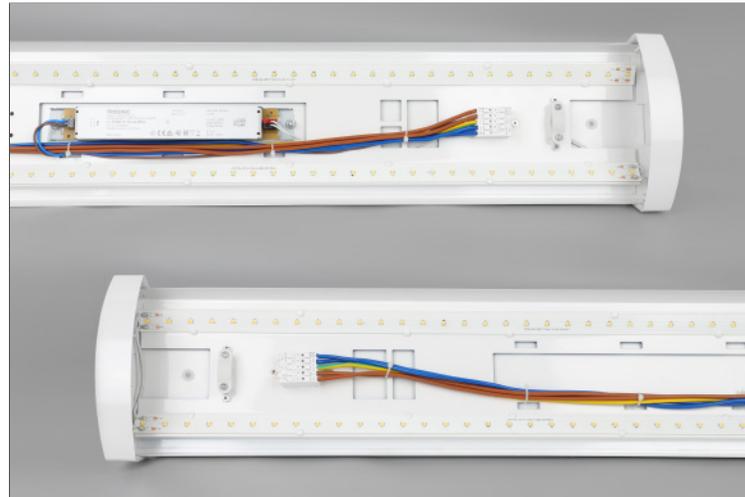

Advantages

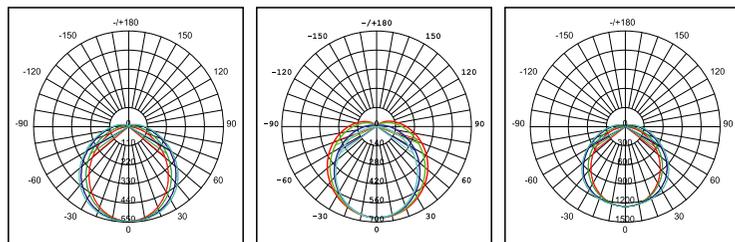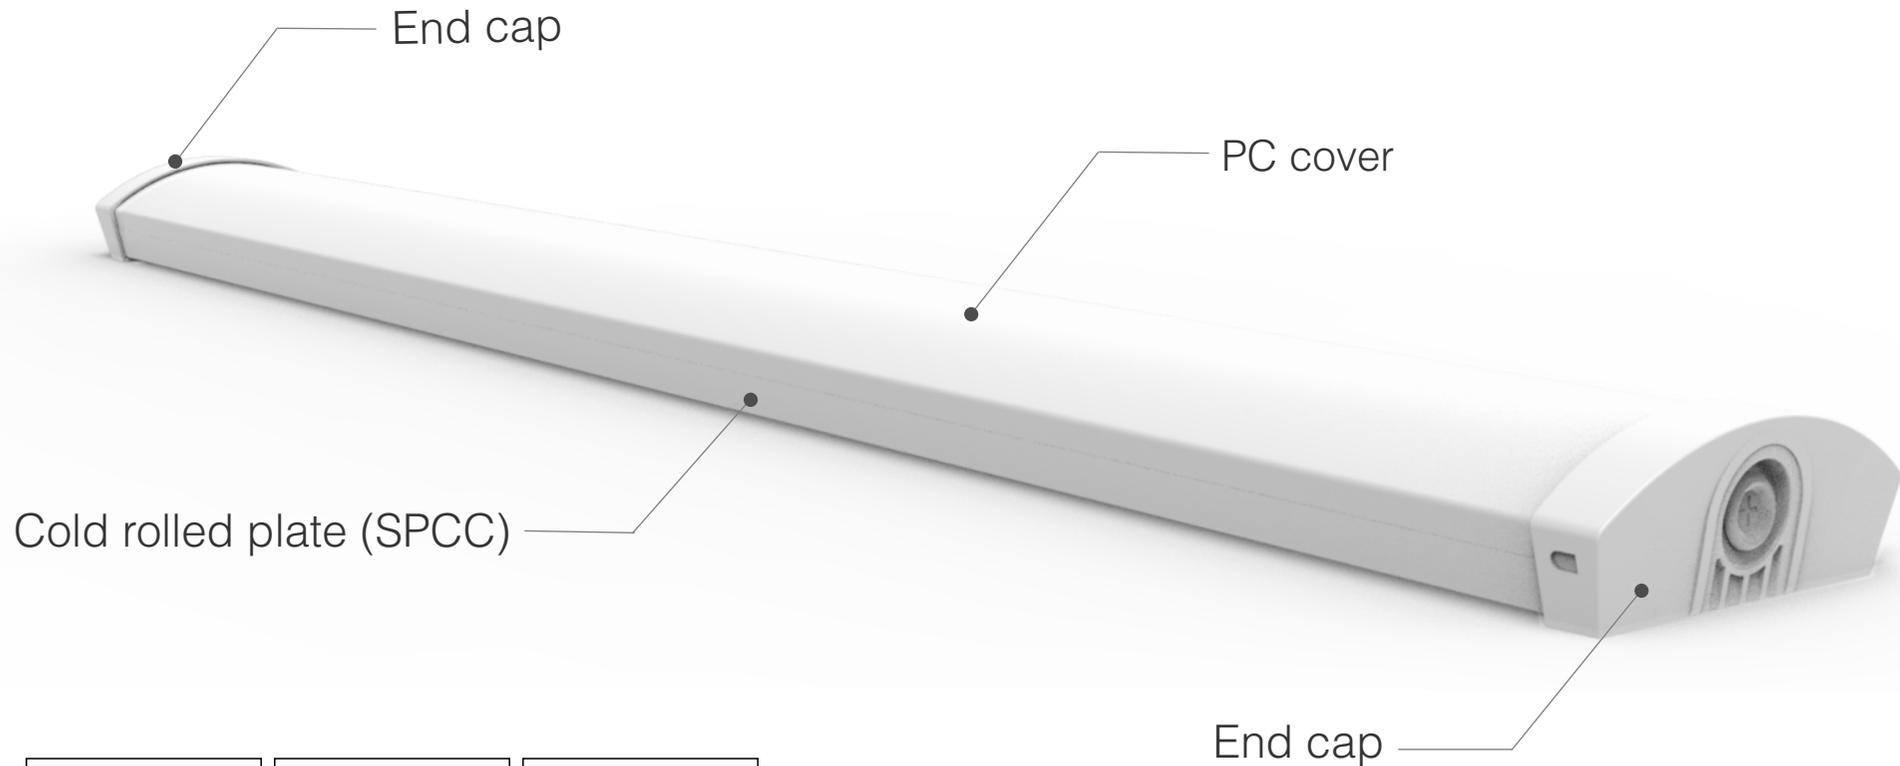


BF-06-20A1

BF-12-45A1

BF-15-35A1


| Advantages

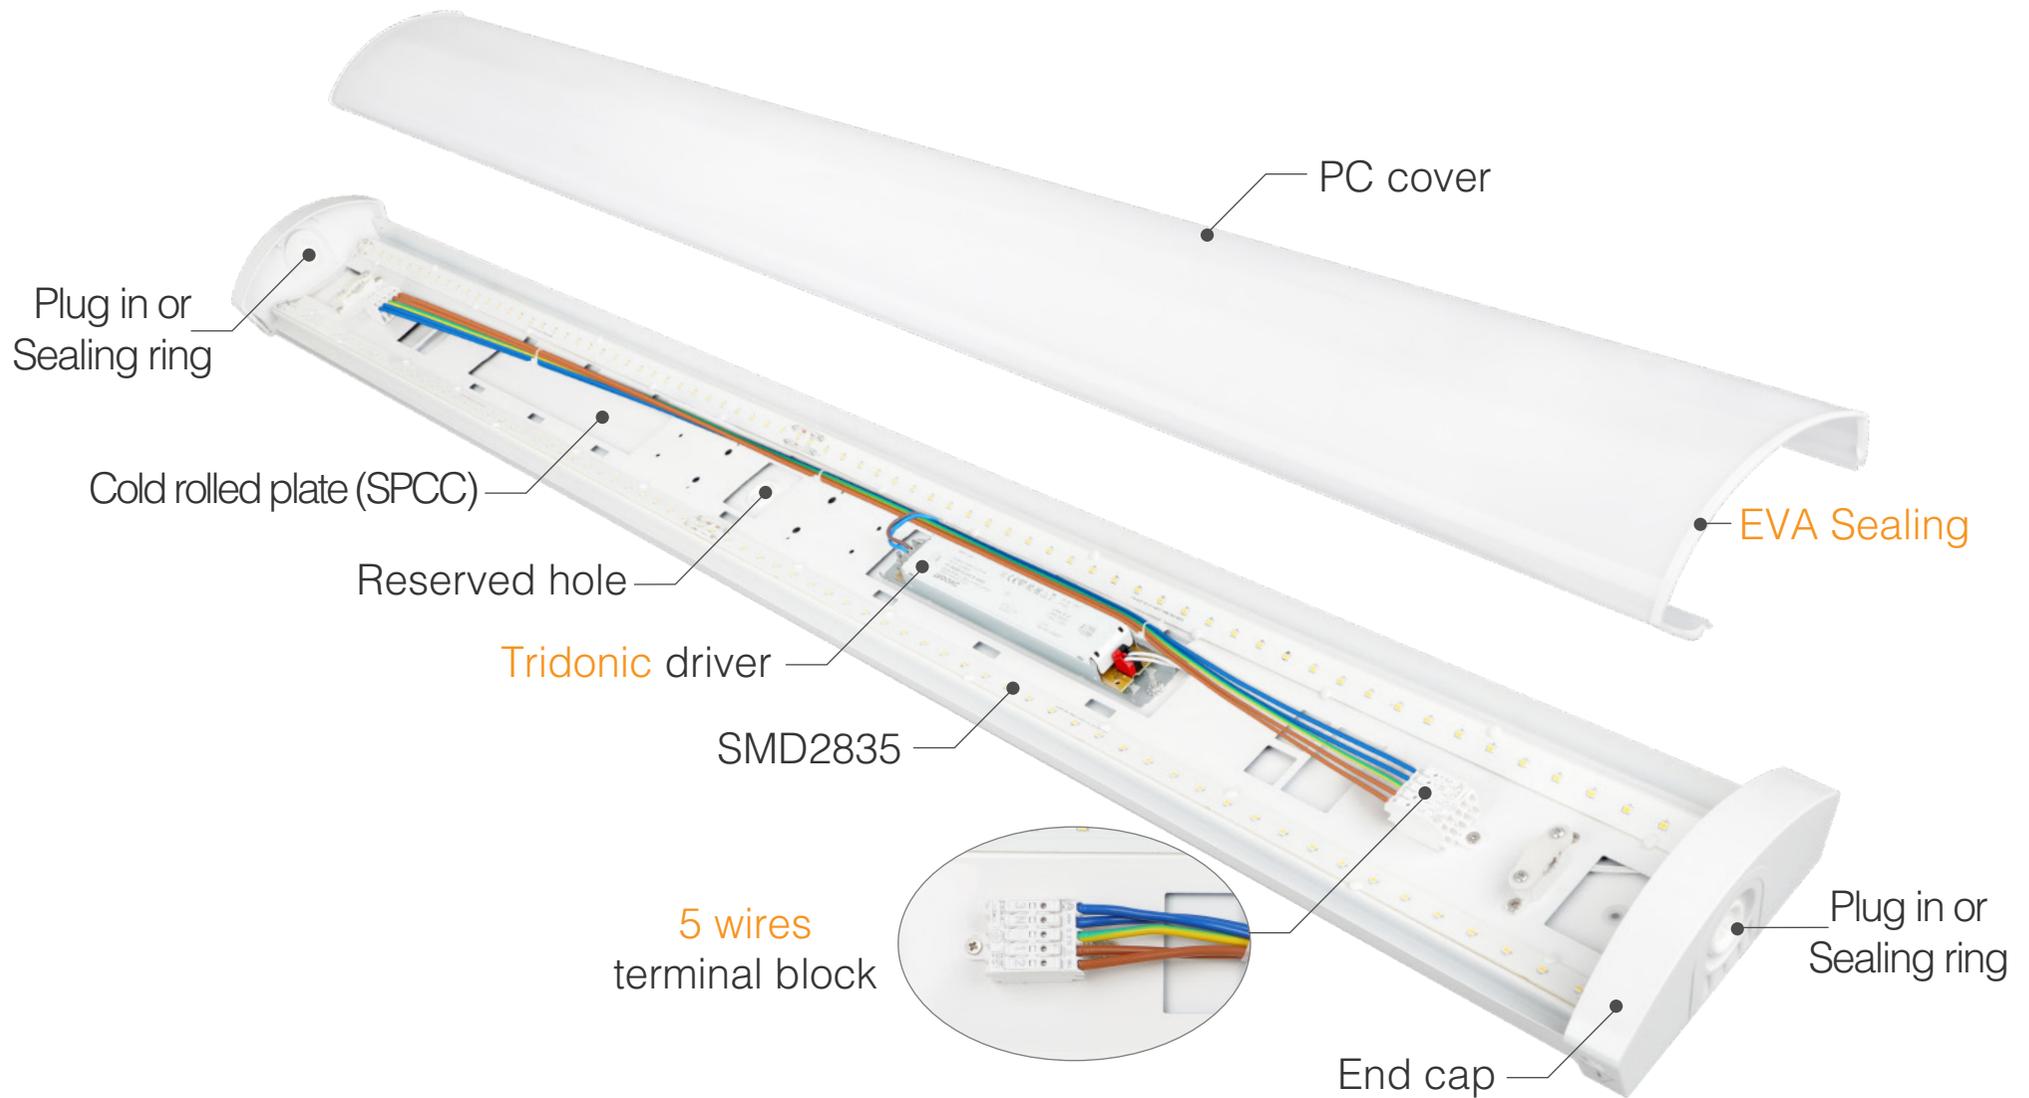

Specification




Side view

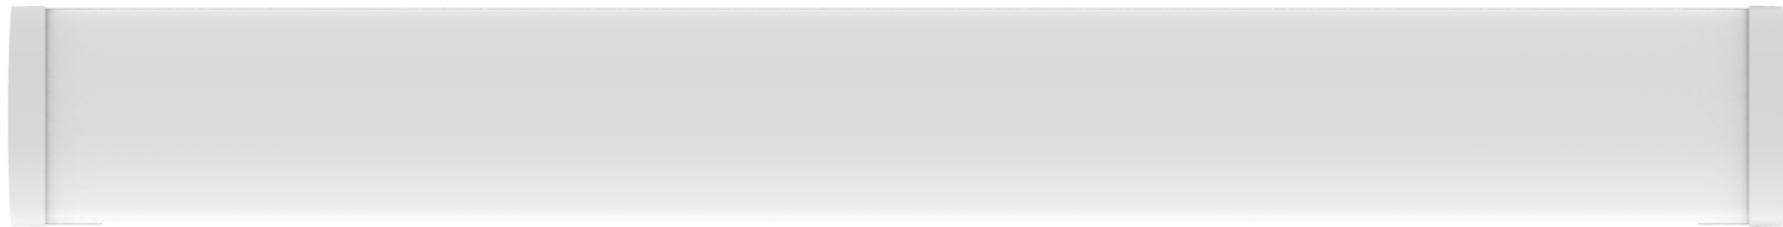

Front view

Product code	Size (mm)	Wattage	Input Voltage	Light Efficiency	Luminous Flux	CCT	CRI	Power Factor	IP Rating
BF-06-20A1	602*160*61	20W	220-240V	130lm/W	2600lm	3000-6500K	>80	0.9	IP44
BF-12-45A1	1160*160*61	45W	220-240V	130lm/W	5850lm	3000-6500K	>80	0.9	IP44
BF-15-35A1	1440*160*61	35W	220-240V	130lm/W	4550lm	3000-6500K	>80	0.9	IP44
BF-15-55A1	1440*160*61	55W	220-240V	130lm/W	7150lm	3000-6500K	>80	0.9	IP44

Package

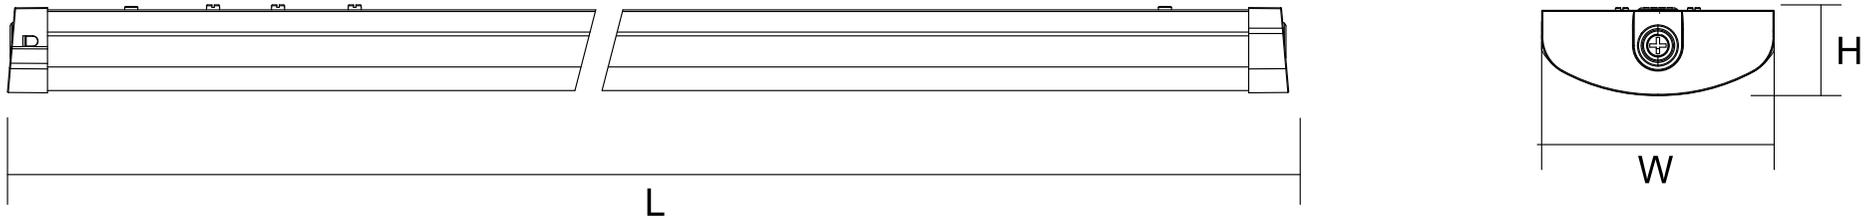

Model	Size(mm)	QTY	Dimmension(mm)	G.W
BF-06-20A1	602*160*61	6	697*345*218	10 kg
BF-12-45A1	1160*160*61	6	1255*345*218	15.5 kg
BF-15-35A1	1440*160*61	6	1535*343*242	18.6 kg
BF-15-55A1	1440*160*61	6	1535*343*242	19.2 kg