
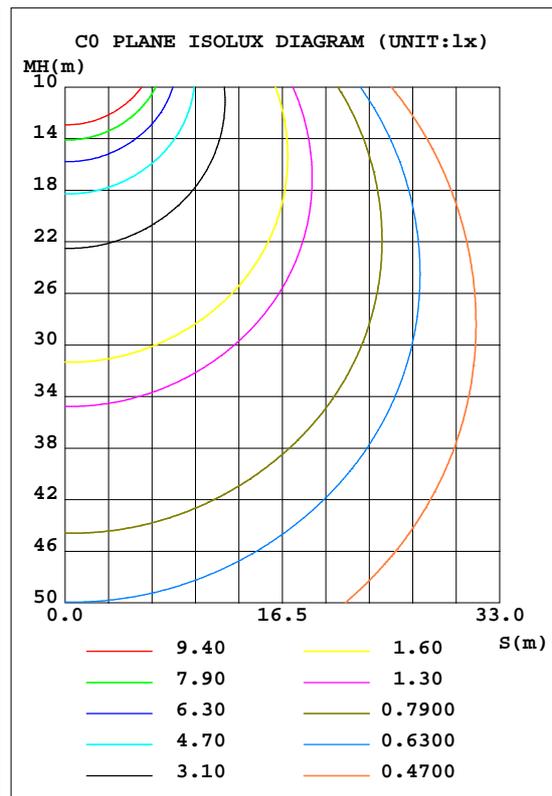


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.6V I:0.1910A P:42.50W PF:0.9700 Lamp Flux:6237x1 lm		
NAME: BF-15-42C1-3CCT 2	TYPE:	WEIGHT:
SPEC.:	DIM.: 1.43*0.142*0.053	SERIAL No.:
MFR.:	SUR.:1.43*0.142	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 146.75 lm/W			
MODEL	BF-15-42C1-3CCT 2	I _{max} (cd)	1567	S/MH(C0/180)	1.33
NOMINAL POWER(W)	42	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	6237.0	h UP,DN(C0-180)	5.8,44.4
NOMINAL FLUX(lm)	6237	CIE CLASS	SEMI-D.	h UP,DN(C180-360)	5.7,44.2
LAMPS INSIDE	1	h up(%)	11.4	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	229.9	h down(%)	88.6	CIBSE SHR MAX	1.55

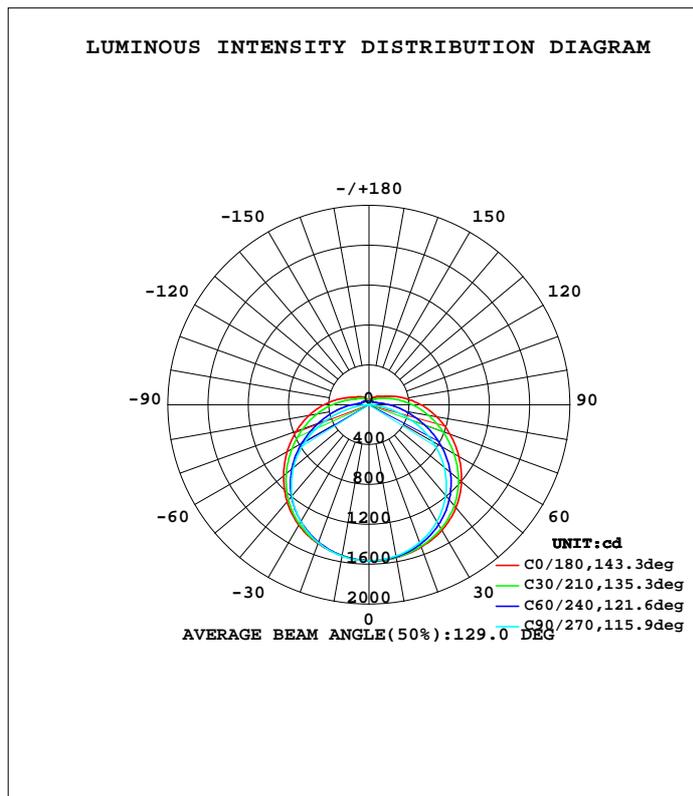

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1558	1554	1541	1534	1536	1536	1542	1554	0- 10	148.4	148.4	2.38,2.38
20	1519	1502	1471	1466	1482	1471	1473	1502	10- 20	429.5	577.9	9.27,9.27
30	1453	1413	1354	1359	1396	1368	1357	1412	20- 30	665.5	1243	19.9,19.9
40	1348	1286	1189	1211	1269	1223	1193	1283	30- 40	829.2	2073	33.2,33.2
50	1201	1115	977.5	1023	1110	1037	982.3	1111	40- 50	898.3	2971	47.6,47.6
60	1032	908.3	725.8	810.8	939.5	826.0	730.8	903.0	50- 60	864.9	3836	61.5,61.5
70	856.4	693.0	442.2	604.2	768.7	619.6	447.8	686.1	60- 70	742.7	4579	73.4,73.4
80	683.2	497.0	160.3	421.2	603.1	434.0	163.5	490.7	70- 80	564.7	5143	82.5,82.5
90	519.5	332.0	1.000	272.1	450.3	281.0	1.469	328.2	80- 90	381.9	5525	88.6,88.6
100	373.0	208.6	2.829	170.7	316.7	174.9	2.689	208.4	90-100	247.3	5773	92.6,92.6
110	254.6	132.1	5.816	118.9	217.9	119.3	5.874	129.5	100-110	160.7	5933	95.1,95.1
120	173.8	86.52	9.194	99.51	158.2	99.53	9.512	85.73	110-120	106.9	6040	96.8,96.8
130	131.2	68.02	12.44	84.98	127.4	85.12	13.01	66.97	120-130	75.32	6115	98.1,98.1
140	106.9	53.02	17.17	70.17	102.5	70.61	17.26	51.22	130-140	52.94	6168	98.9,98.9
150	84.27	42.23	21.56	55.17	78.43	55.67	21.54	42.95	140-150	35.40	6204	99.5,99.5
160	62.44	36.93	24.91	40.17	55.11	40.87	25.15	37.67	150-160	20.68	6225	99.8,99.8
170	41.13	29.47	27.41	30.60	32.23	30.80	27.59	30.14	160-170	9.795	6234	100,100
180	29.13	27.79	28.66	27.96	29.11	27.79	28.68	27.95	170-180	2.703	6237	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.05	1.05	1.05	.98	.98	.98	.92	.92	.92	.89
1.0	.98	.93	.88	.95	.90	.86	.88	.84	.81	.82	.79	.76	.77	.74	.72	.69
2.0	.84	.77	.70	.81	.74	.68	.76	.70	.65	.71	.66	.62	.66	.62	.59	.56
3.0	.73	.64	.57	.71	.63	.56	.66	.59	.54	.62	.56	.51	.58	.53	.49	.46
4.0	.64	.55	.48	.62	.54	.47	.58	.51	.45	.55	.48	.43	.51	.46	.41	.39
5.0	.57	.48	.41	.55	.47	.40	.52	.44	.39	.49	.42	.37	.46	.40	.36	.33
6.0	.51	.42	.35	.50	.41	.35	.47	.39	.33	.44	.37	.32	.41	.36	.31	.29
7.0	.46	.37	.31	.45	.36	.30	.42	.35	.29	.40	.33	.28	.38	.32	.27	.25
8.0	.42	.33	.27	.41	.33	.27	.39	.31	.26	.36	.30	.25	.34	.29	.24	.22
9.0	.39	.30	.24	.37	.30	.24	.35	.28	.23	.34	.27	.23	.32	.26	.22	.20
10.0	.35	.27	.22	.35	.27	.22	.33	.26	.21	.31	.25	.20	.29	.24	.20	.18

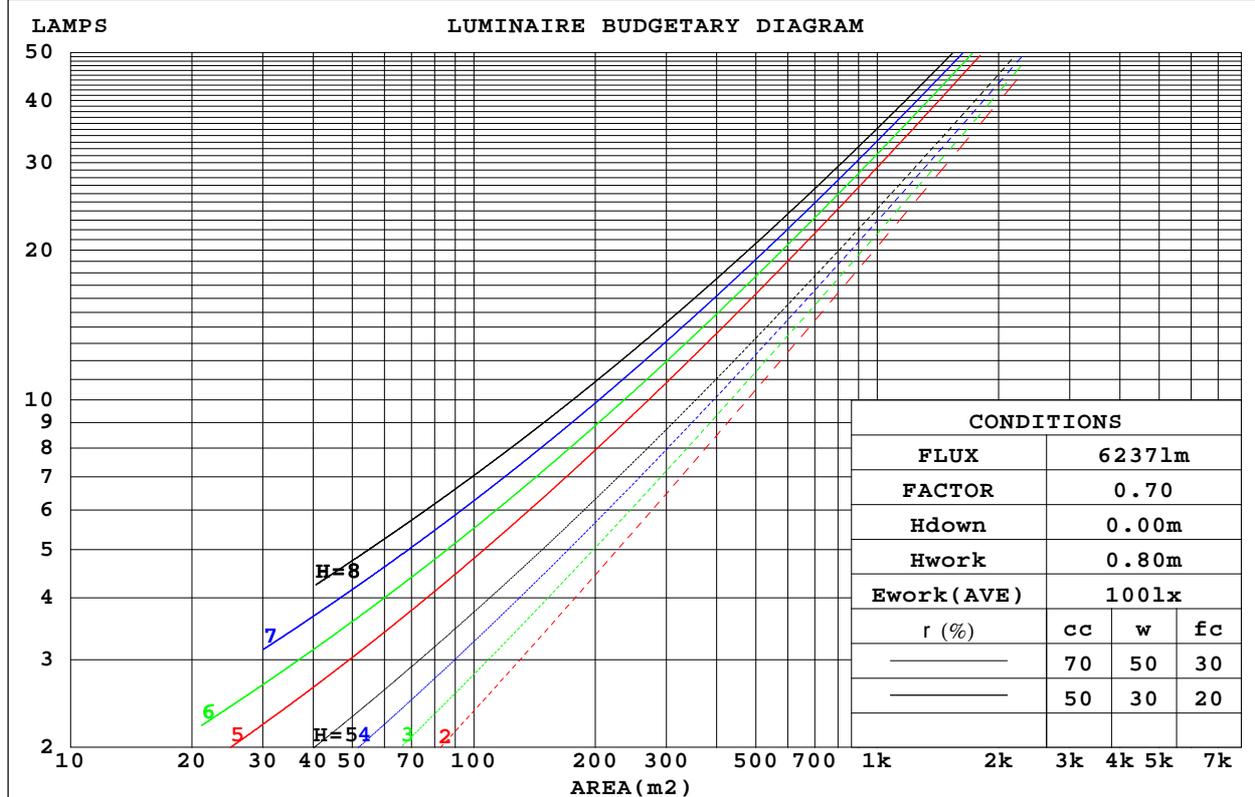

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

WEC AND CCEC

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.368	.209	.066	.358	.204	.065	.338	.194	.062	.319	.184	.059	.302	.175	.056	
2.0	.325	.178	.055	.315	.174	.054	.297	.165	.051	.281	.157	.049	.265	.150	.047	
3.0	.291	.155	.046	.283	.151	.046	.267	.144	.044	.252	.138	.042	.238	.132	.041	
4.0	.264	.137	.040	.256	.134	.040	.242	.128	.038	.228	.122	.037	.215	.117	.036	
5.0	.241	.123	.036	.234	.120	.035	.221	.115	.034	.208	.110	.033	.197	.105	.032	
6.0	.221	.111	.032	.215	.109	.031	.203	.104	.030	.192	.100	.029	.181	.095	.028	
7.0	.204	.101	.029	.199	.099	.028	.188	.095	.027	.178	.091	.027	.168	.087	.026	
8.0	.190	.093	.026	.185	.091	.026	.175	.087	.025	.165	.084	.024	.157	.080	.023	
9.0	.177	.086	.024	.172	.084	.024	.163	.081	.023	.155	.078	.022	.147	.075	.022	
10.0	.166	.080	.022	.162	.078	.022	.153	.075	.021	.145	.072	.021	.138	.069	.020	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.277	.277	.277	.237	.237	.237	.162	.162	.162	.093	.093	.093	.030	.030	.030	
1.0	.272	.243	.217	.233	.209	.187	.159	.144	.129	.092	.083	.075	.029	.027	.024	
2.0	.265	.220	.182	.227	.189	.158	.156	.131	.110	.090	.076	.064	.029	.025	.021	
3.0	.257	.203	.160	.221	.175	.139	.151	.122	.097	.087	.071	.057	.028	.023	.019	
4.0	.250	.190	.145	.214	.165	.126	.147	.115	.089	.085	.067	.053	.027	.022	.017	
5.0	.242	.180	.135	.208	.156	.117	.143	.109	.083	.083	.064	.049	.027	.021	.016	
6.0	.235	.172	.128	.202	.149	.111	.139	.104	.079	.081	.061	.047	.026	.020	.015	
7.0	.227	.166	.122	.196	.144	.107	.135	.101	.076	.079	.059	.045	.025	.019	.015	
8.0	.221	.160	.118	.190	.139	.103	.132	.097	.073	.077	.057	.044	.025	.019	.014	
9.0	.215	.155	.115	.185	.135	.100	.128	.095	.071	.075	.056	.043	.024	.018	.014	
10.0	.209	.151	.113	.180	.131	.098	.125	.092	.070	.073	.055	.042	.024	.018	.014	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.5	22.0	20.9	22.4	22.8	19.1	20.5	19.5	20.9	21.3
3H	23.0	24.3	23.4	24.7	25.2	20.5	21.9	21.0	22.3	22.8
4H	24.3	25.5	24.8	26.0	26.5	21.1	22.4	21.6	22.8	23.3
6H	25.7	26.9	26.2	27.4	27.9	21.4	22.6	21.9	23.1	23.6
8H	26.5	27.7	27.0	28.1	28.7	21.5	22.7	22.0	23.2	23.7
12H	27.4	28.5	27.9	29.0	29.6	21.5	22.7	22.1	23.1	23.7
4H 2H	21.1	22.4	21.6	22.8	23.3	20.0	21.3	20.5	21.7	22.2
3H	23.8	24.9	24.3	25.4	25.9	21.7	22.9	22.3	23.3	23.9
4H	25.3	26.3	25.8	26.8	27.4	22.5	23.5	23.0	24.0	24.6
6H	26.9	27.9	27.5	28.4	29.0	23.0	23.9	23.5	24.4	25.0
8H	27.9	28.7	28.4	29.3	29.9	23.1	24.0	23.7	24.5	25.2
12H	28.9	29.7	29.5	30.3	30.9	23.2	24.0	23.8	24.6	25.2
8H 4H	25.6	26.5	26.2	27.0	27.7	23.3	24.2	23.9	24.7	25.4
6H	27.6	28.3	28.2	28.9	29.5	24.1	24.9	24.8	25.5	26.1
8H	28.7	29.3	29.3	30.0	30.6	24.5	25.1	25.1	25.7	26.4
12H	30.0	30.6	30.6	31.2	31.9	24.7	25.3	25.3	25.9	26.6
12H 4H	25.6	26.4	26.2	27.0	27.6	23.6	24.4	24.2	24.9	25.6
6H	27.7	28.3	28.3	28.9	29.6	24.6	25.3	25.2	25.9	26.6
8H	28.9	29.5	29.5	30.1	30.8	25.1	25.7	25.7	26.3	27.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 6237 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.4)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	51	38	31	50	38	31	48	37	31	24
0.80	60	47	39	59	47	39	56	46	39	31
1.00	68	56	47	66	55	47	63	56	46	38
1.25	75	63	55	73	62	54	69	60	53	44
1.50	80	68	60	78	67	59	74	65	58	48
2.00	87	77	69	85	75	68	80	72	66	55
2.50	92	82	75	89	80	73	83	76	70	59
3.00	95	87	80	92	84	78	86	80	75	63
4.00	100	92	86	96	90	84	90	85	80	68
5.00	103	96	91	99	93	89	93	88	84	71
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Conical surface Flux(90deg):

2519.6 lm

%lum = 40.4%


%lamp = 40.4%

Conical surface Flux(120deg):

3835.9 lm

%lum = 61.5%


%lamp = 61.5%

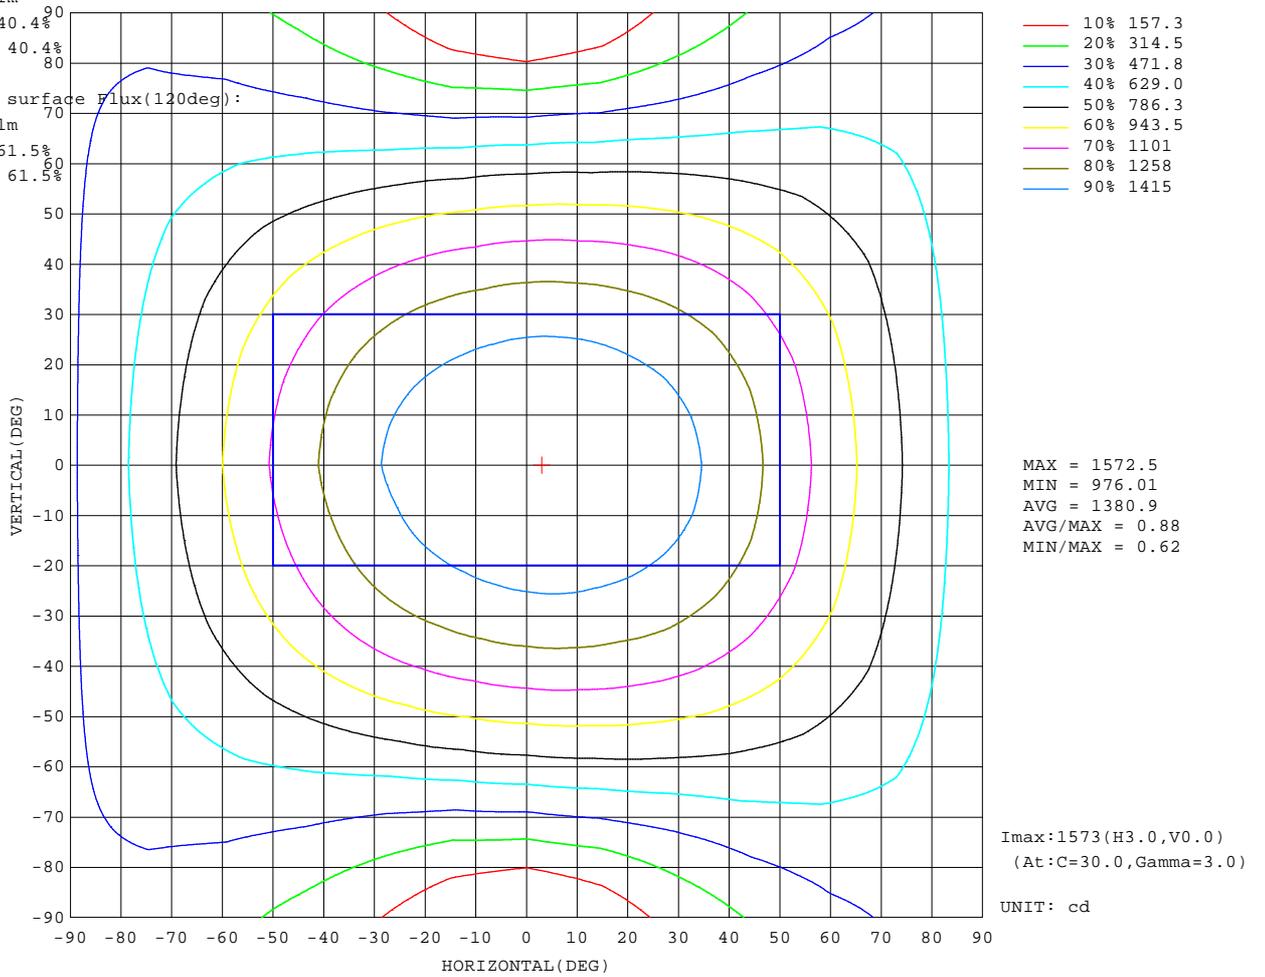

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

AAI Figure

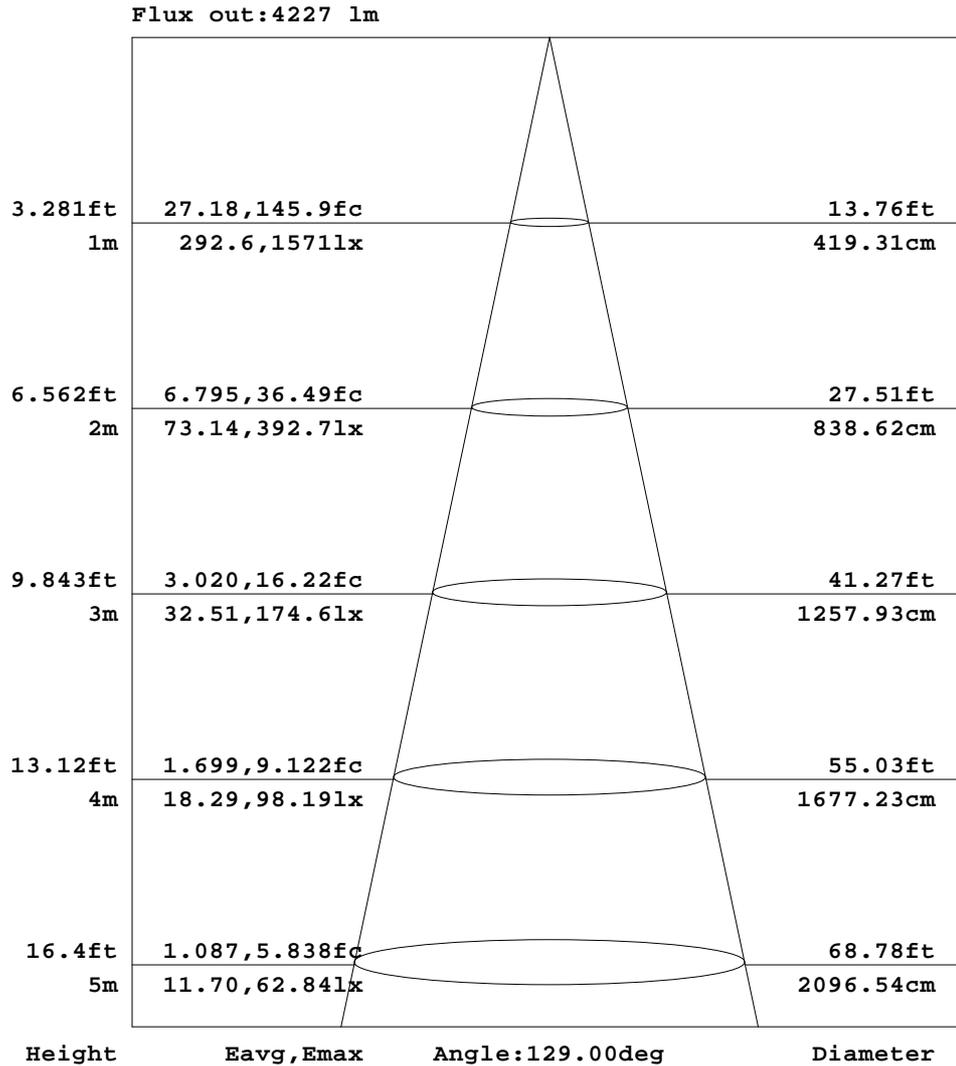


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:


ISOLUX DIAGRAM

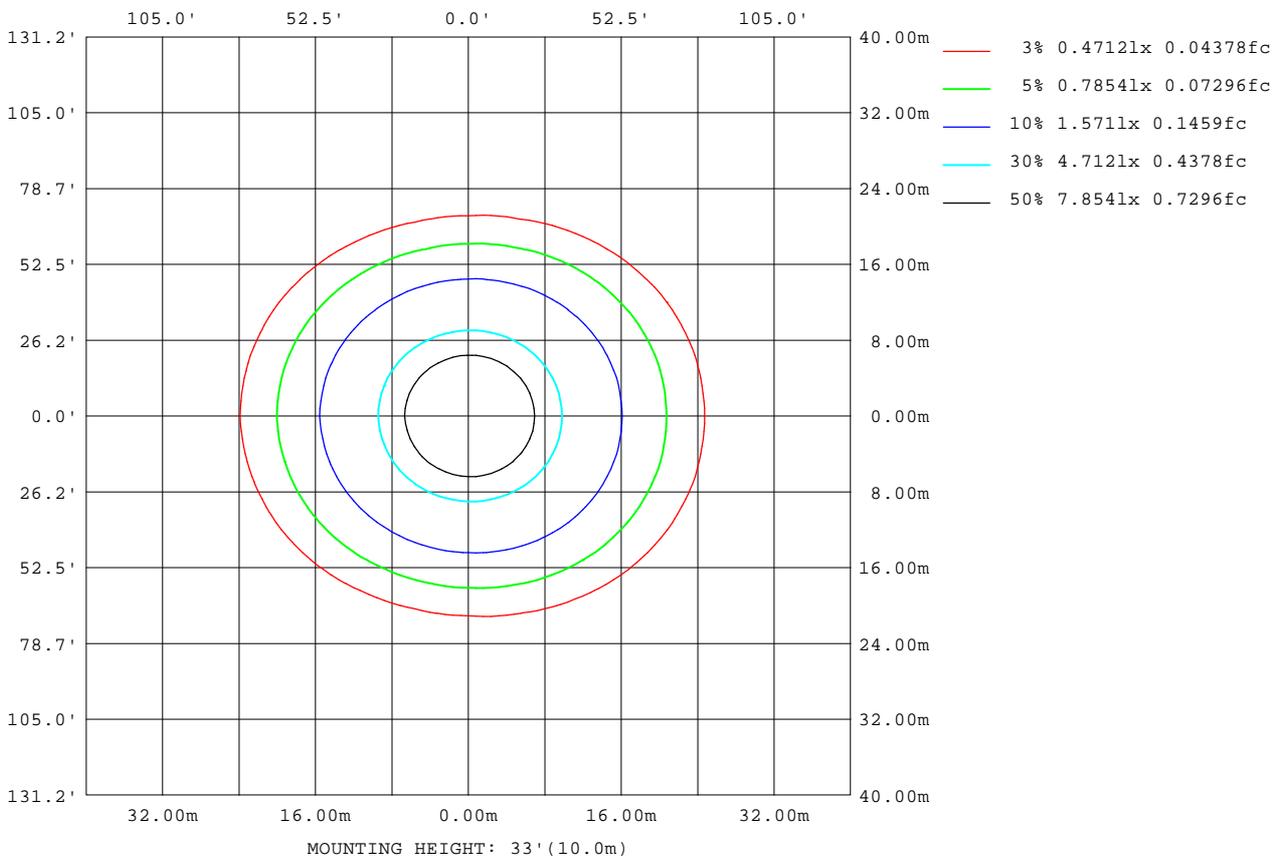

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

Planar Illuminance Curve

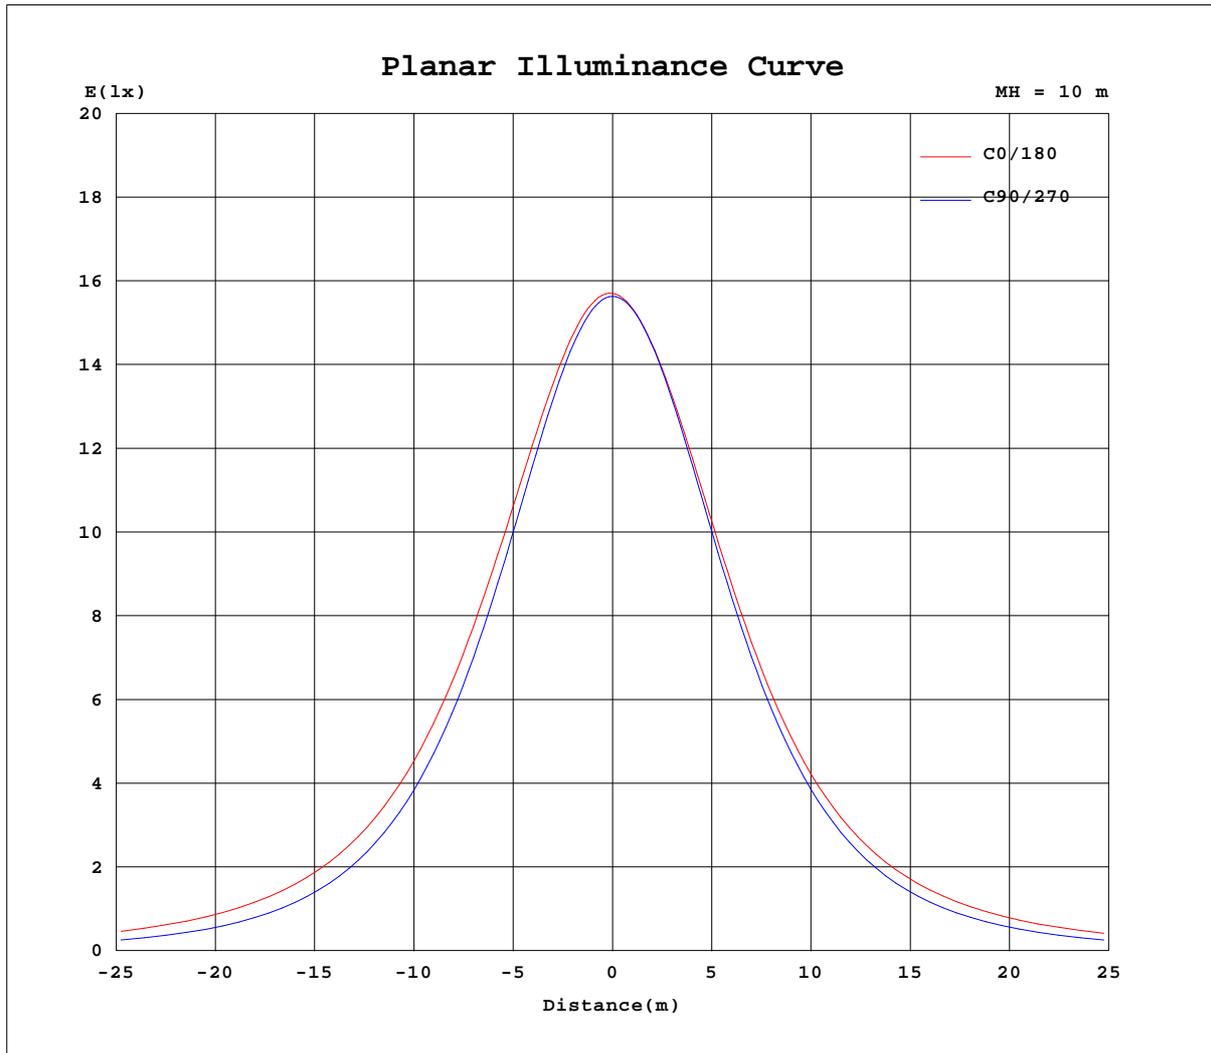

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 24.6DEG
 Operators:
 Test Date: 2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity: 46.0%
 Test Distance: 9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) g (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565	1565
5	1566	1566	1566	1565	1563	1561	1559	1557	1556	1555	1554	1553	1555	1555	1555	1556	1557	1558	1560
10	1558	1558	1556	1554	1549	1546	1541	1539	1536	1534	1534	1534	1536	1536	1536	1536	1538	1539	1542
15	1542	1542	1538	1532	1526	1520	1512	1508	1505	1504	1506	1509	1513	1512	1511	1507	1508	1509	1514
20	1519	1519	1512	1502	1492	1482	1471	1466	1463	1466	1471	1476	1482	1481	1476	1471	1467	1467	1473
25	1490	1488	1477	1463	1445	1432	1419	1411	1411	1417	1427	1436	1444	1442	1434	1424	1416	1414	1421
30	1453	1451	1435	1413	1388	1370	1354	1346	1348	1359	1373	1385	1396	1393	1383	1368	1355	1349	1357
35	1406	1402	1383	1355	1321	1297	1277	1269	1274	1291	1309	1324	1337	1332	1320	1300	1284	1273	1281
40	1348	1344	1321	1286	1244	1212	1189	1180	1190	1211	1234	1253	1269	1263	1247	1223	1201	1186	1193
45	1279	1274	1247	1207	1156	1115	1089	1081	1095	1122	1149	1173	1192	1184	1165	1134	1107	1087	1093
50	1201	1195	1163	1115	1057	1008	978	971	990	1023	1057	1088	1110	1099	1074	1037	1004	978	982
55	1118	1109	1071	1016	948	892	856	851	876	918	963	1000	1025	1012	980	933	891	859	861
60	1032	1021	974	908	832	766	726	724	756	811	867	913	940	925	886	826	772	732	731
65	944	931	877	800	710	633	587	589	634	705	773	825	854	837	791	722	651	598	592
70	856	841	781	693	587	496	442	453	517	604	682	738	769	750	699	620	533	462	448
75	769	752	689	592	472	360	297	318	408	509	594	654	685	664	610	523	424	330	301
80	683	665	598	497	368	235	160	203	312	421	510	572	603	582	524	434	326	214	163
85	600	581	514	410	278	139	49.6	116	231	343	432	494	525	503	444	352	241	123	52.5
90	519	500	434	332	205	75.8	1.00	61.7	168	272	361	421	450	428	371	281	175	66.1	1.47
95	443	424	361	264	149	43.9	1.59	37.7	121	215	298	354	381	360	304	222	126	39.9	1.67
100	373	355	297	209	110	34.6	2.83	32.6	93.2	171	243	293	317	299	248	175	95.7	33.7	2.69
105	310	292	241	165	85.9	33.5	4.40	32.1	79.2	139	199	242	263	247	202	141	80.3	33.1	4.13
110	255	239	196	132	69.9	31.1	5.82	31.8	73.4	119	165	201	218	205	168	119	73.9	32.7	5.87
115	209	196	161	104	61.3	29.2	7.47	31.5	69.6	107	143	170	183	172	144	107	70.1	32.3	7.68
120	174	164	137	86.5	55.4	28.0	9.19	31.0	65.9	99.5	128	149	158	149	128	99.5	66.3	31.7	9.51
125	148	141	120	76.4	50.2	26.9	10.8	30.3	62.0	92.3	117	134	141	134	117	92.3	62.4	30.9	11.3
130	131	126	95.3	68.0	45.6	25.7	12.4	29.5	57.9	85.0	107	121	127	122	107	85.1	58.4	30.0	13.0
135	119	114	81.2	60.1	41.4	24.5	14.6	28.4	53.6	77.6	96.8	109	115	110	97.3	78.0	54.1	28.9	15.0
140	107	103	70.2	53.0	37.7	25.2	17.2	27.5	49.2	70.2	86.8	97.6	103	98.0	87.4	70.6	49.8	27.8	17.3
145	95.5	92.4	62.6	46.6	37.1	25.9	19.5	27.0	44.7	62.7	76.9	86.0	90.4	86.5	77.5	63.1	45.3	27.0	19.5
150	84.3	74.8	56.8	42.2	36.1	26.3	21.6	26.7	40.0	55.2	67.0	74.6	78.4	75.1	67.9	55.7	40.7	26.8	21.5
155	73.3	56.7	48.0	39.8	34.6	26.2	23.3	26.8	35.6	47.6	57.3	63.3	66.7	63.8	58.3	48.3	36.2	27.0	23.4
160	62.4	45.1	40.1	36.9	32.7	26.3	24.9	27.0	32.2	40.2	47.6	52.2	55.1	52.7	48.5	40.9	32.7	27.3	25.1
165	51.8	35.1	33.1	33.5	30.3	26.7	26.3	27.4	30.2	34.1	38.5	41.3	43.8	41.8	39.2	34.6	30.6	27.6	26.5
170	41.1	26.3	28.8	29.5	28.4	27.3	27.4	27.8	28.9	30.6	32.3	32.7	32.2	33.0	32.6	30.8	29.1	28.0	27.6
175	31.9	22.3	26.0	27.4	27.9	27.8	28.2	28.3	28.4	28.6	28.6	26.9	25.0	27.0	28.6	28.5	28.4	28.3	28.3
180	29.1	23.0	26.6	27.8	28.3	28.6	28.7	28.6	28.5	28.0	26.9	23.1	29.1	23.0	25.7	27.8	28.3	28.6	28.7

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--2

UNIT: cd

C(DEG) g (DEG)	285	300	315	330	345														
0	1565	1565	1565	1565	1565														
5	1561	1564	1565	1566	1566														
10	1546	1551	1554	1558	1559														
15	1520	1527	1534	1539	1543														
20	1482	1493	1502	1514	1520														
25	1432	1446	1461	1478	1490														
30	1370	1389	1412	1435	1451														
35	1295	1321	1352	1383	1404														
40	1211	1243	1283	1321	1345														
45	1114	1154	1202	1247	1276														
50	1006	1056	1111	1163	1197														
55	889	947	1011	1071	1111														
60	763	830	903	974	1022														
65	629	707	793	877	931														
70	491	583	686	781	842														
75	355	467	585	687	753														
80	230	362	491	598	667														
85	133	272	405	513	582														
90	71.1	200	328	434	502														
95	41.3	146	263	363	427														
100	32.1	106	208	297	358														
105	32.3	84.8	162	242	296														
110	28.7	68.7	130	197	243														
115	27.3	60.2	104	158	200														
120	26.9	54.0	85.7	134	166														
125	26.2	47.7	75.4	118	142														
130	25.2	43.5	67.0	94.4	123														
135	24.2	40.4	57.9	80.0	110														
140	25.0	37.8	51.2	69.1	102														
145	25.7	37.3	46.0	61.6	91.3														
150	26.1	36.3	43.0	55.8	71.9														
155	26.2	34.9	40.6	48.2	54.3														
160	26.4	33.1	37.7	40.6	44.5														
165	26.9	30.7	34.2	34.0	35.6														
170	27.4	28.7	30.1	29.8	27.4														
175	27.9	28.1	27.9	26.5	23.1														
180	28.6	28.5	27.9	26.8	23.1														

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:
 Test Date:2024-07-29

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.286
 Humidity:46.0%
 Test Distance:9.960m [K=1.0000]
 Remarks: