
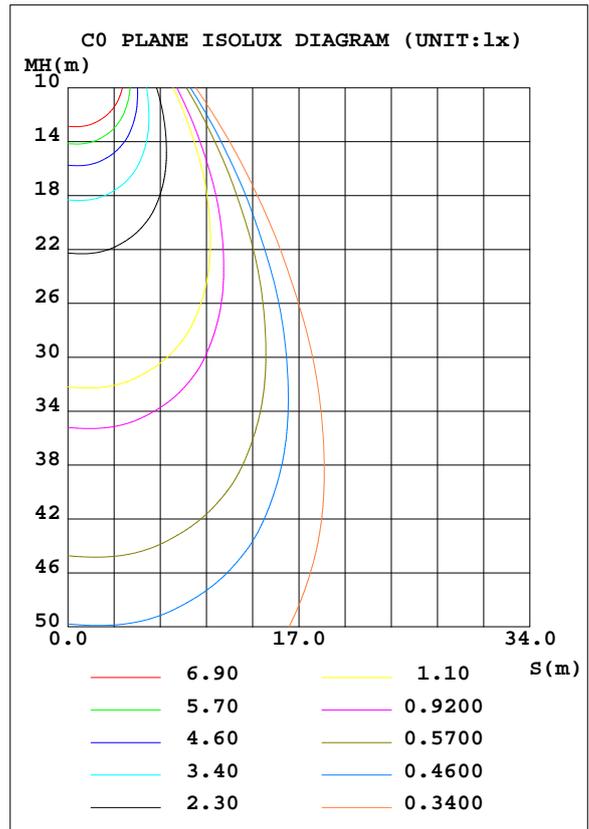


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm		
NAME: 4 INCH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:80	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 86.33 lm/W			
MODEL	4 INCH	Imax(cd)	1153	S/MH(C0/180)	0.83
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.86
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	943.98	η UP, DN(C0-180)	0.0,49.9
NOMINAL FLUX(lm)	943.981	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,50.1
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	230	η down(%)	100.0	CIBSE SHR MAX	0.90

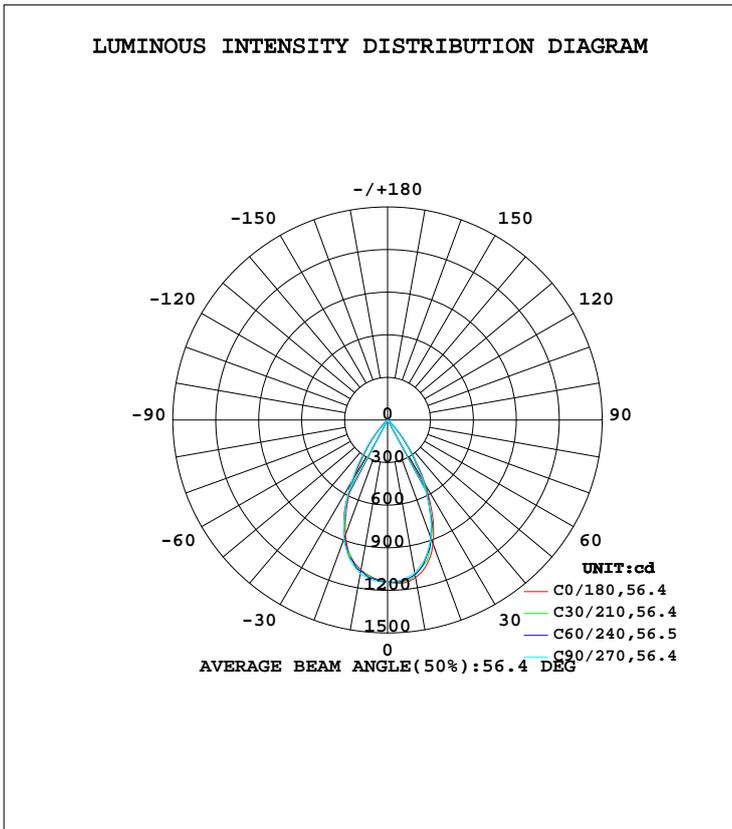

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-01

V(B) Range:-85 - 85DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.240m [K=1.0000]
 Remarks: 4 INCH

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1126	1106	1094	1073	1071	1077	1101	1111	0- 10	106.9	106.9	11.3,11.3
20	927.6	883.5	884.0	880.9	863.2	890.7	893.0	890.5	10- 20	282.5	389.3	41.2,41.2
30	527.7	487.5	495.0	500.8	467.6	507.7	499.3	489.0	20- 30	318.1	707.4	74.9,74.9
40	160.3	143.4	136.7	137.1	128.6	142.8	143.7	145.8	30- 40	186.5	893.9	94.7,94.7
50	7.627	6.446	6.054	5.402	4.612	5.378	5.746	6.569	40- 50	43.07	937.0	99.3,99.3
60	1.816	2.326	3.156	2.823	2.021	2.065	2.125	1.919	50- 60	3.032	940.0	99.6,99.6
70	1.097	1.737	2.459	2.281	1.243	1.223	1.281	1.196	60- 70	1.866	941.9	99.8,99.8
80	0.6253	1.318	1.827	1.686	0.6148	0.6941	0.7913	0.7754	70- 80	1.381	943.3	99.9,99.9
90	0.0736	0	0	0	0.0920	0	0	0	80- 90	0.6956	944.0	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 927.4 lm

%lum = 98.2%
 %lamp = 98.2%

Conical surface Flux(120deg): 940.04 lm


%lum = 99.6%
 %lamp = 99.6%

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-01

V(B) Range:-85 - 85DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.240m [K=1.0000]
 Remarks: 4 INCH

LUMINANCE LIMITATION CURVES

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm		
NAME: 4 INCH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:80	Shielding Angle:

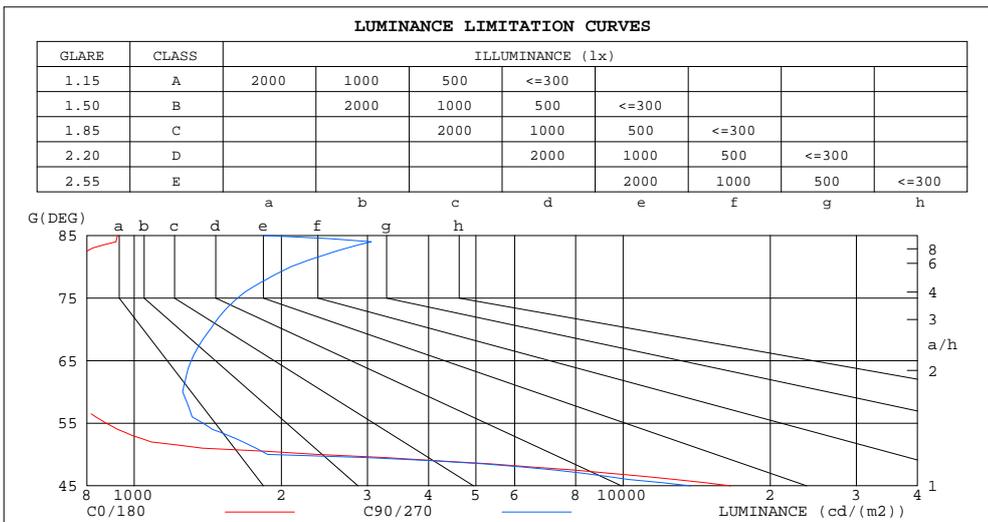

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	924	1833
80	717	2094
75	647	1627
70	638	1431
65	654	1308
60	723	1256
55	876	1382
50	2362	1875
45	16592	13749


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-01

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 4 INCH

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm		
NAME: 4 INCH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:80	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.06	1.09	1.07	1.05	1.05	1.03	1.01	1.01	.00	.98	.98	.97	.96	.94
2.0	1.04	.00	.96	1.02	.98	.95	.99	.96	.93	.96	.93	.91	.93	.91	.89	.88
3.0	.97	.92	.88	.95	.91	.87	.93	.89	.86	.90	.87	.85	.88	.86	.83	.82
4.0	.91	.85	.81	.90	.85	.81	.87	.83	.80	.86	.82	.79	.84	.81	.78	.77
5.0	.85	.80	.75	.84	.79	.75	.83	.78	.74	.81	.77	.74	.79	.76	.73	.72
6.0	.80	.74	.70	.79	.74	.70	.78	.73	.70	.77	.72	.69	.75	.72	.69	.67
7.0	.76	.70	.66	.75	.69	.66	.74	.69	.65	.72	.68	.65	.71	.67	.64	.63
8.0	.71	.66	.62	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.57	.64	.60	.57	.56
10.0	.64	.58	.55	.64	.58	.55	.63	.58	.54	.62	.57	.54	.61	.57	.54	.53

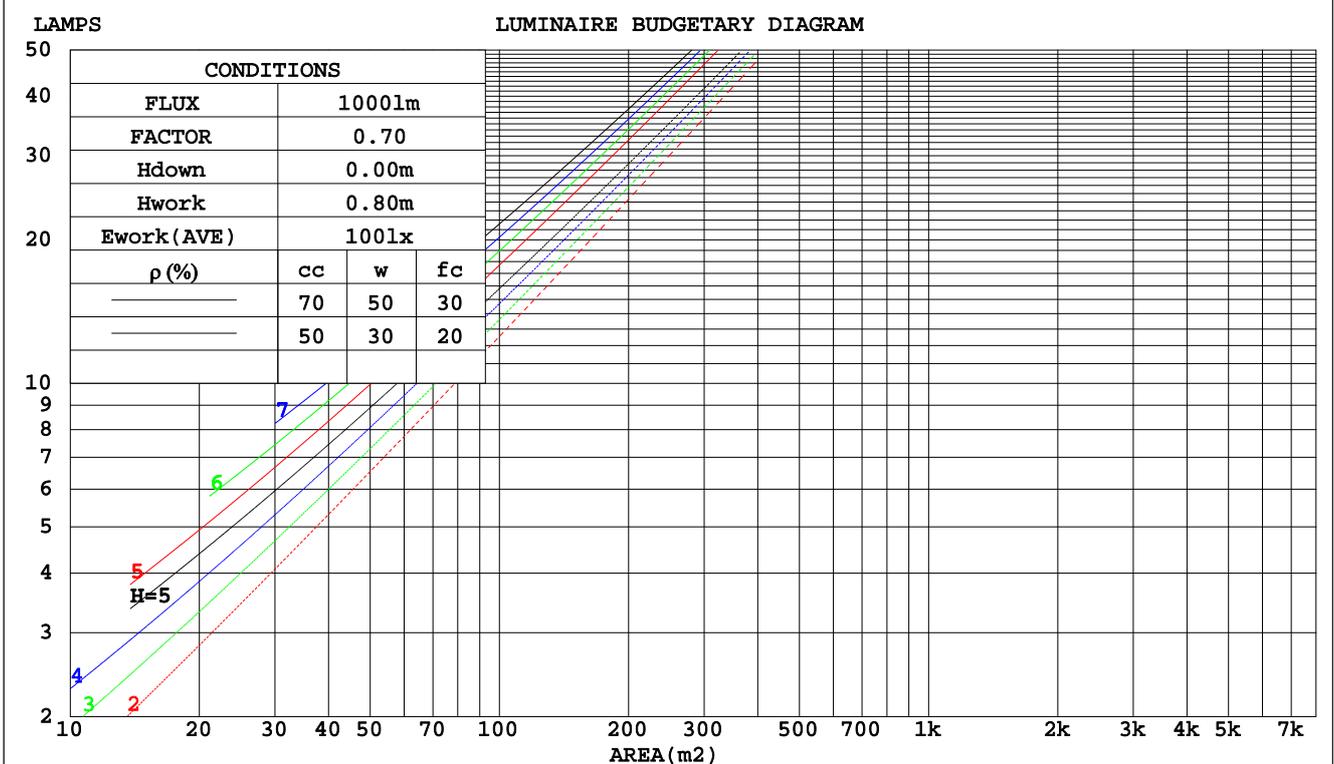

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-01

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 4 INCH

WEC AND CCEC

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm		
NAME: 4 INCH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:80	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.174	.099	.031	.167	.095	.030	.155	.089	.028	.143	.083	.026	.132	.077	.025	
2.0	.166	.091	.028	.160	.088	.027	.150	.083	.026	.140	.079	.025	.131	.074	.023	
3.0	.158	.084	.025	.153	.082	.025	.144	.078	.024	.136	.074	.023	.128	.071	.022	
4.0	.151	.078	.023	.146	.077	.023	.139	.074	.022	.131	.071	.021	.125	.068	.021	
5.0	.144	.073	.021	.140	.072	.021	.133	.069	.020	.127	.067	.020	.121	.065	.019	
6.0	.137	.069	.020	.134	.068	.020	.128	.066	.019	.123	.064	.019	.117	.062	.018	
7.0	.131	.065	.018	.129	.064	.018	.123	.062	.018	.118	.061	.018	.114	.059	.017	
8.0	.126	.062	.017	.123	.061	.017	.119	.059	.017	.114	.058	.017	.110	.057	.016	
9.0	.121	.058	.016	.119	.058	.016	.114	.057	.016	.110	.055	.016	.107	.054	.016	
10.0	.116	.056	.015	.114	.055	.015	.110	.054	.015	.107	.053	.015	.103	.052	.015	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.155	.133	.113	.133	.114	.098	.091	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.143	.114	.090	.123	.098	.078	.084	.068	.055	.049	.040	.032	.016	.013	.011	
4.0	.133	.099	.073	.114	.085	.063	.078	.059	.045	.045	.035	.026	.015	.011	.009	
5.0	.124	.087	.060	.106	.075	.052	.073	.053	.037	.042	.031	.022	.014	.010	.007	
6.0	.116	.078	.050	.100	.067	.044	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.110	.070	.042	.095	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.104	.064	.036	.090	.056	.032	.062	.039	.022	.036	.023	.013	.012	.008	.004	
9.0	.099	.059	.031	.086	.051	.027	.059	.036	.019	.035	.021	.012	.011	.007	.004	
10.0	.095	.054	.028	.082	.047	.024	.057	.033	.017	.033	.020	.010	.011	.006	.003	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-01

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 4 INCH

UGR(Unified Glare Rating) Table

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm										
NAME: 4 INCH					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:80			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.2	19.1	18.4	19.3	19.4	18.3	19.2	18.5	19.4	19.5
3H	18.0	18.9	18.3	19.1	19.3	18.1	19.0	18.4	19.2	19.4
4H	17.9	18.7	18.2	18.9	19.2	18.1	18.9	18.3	19.1	19.3
6H	17.8	18.6	18.1	18.8	19.1	18.0	18.7	18.3	19.0	19.2
8H	17.8	18.5	18.1	18.8	19.0	18.0	18.7	18.3	18.9	19.2
12H	17.8	18.4	18.1	18.7	19.0	18.0	18.6	18.3	18.9	19.2
4H 2H	17.9	18.7	18.2	18.9	19.2	18.0	18.8	18.3	19.0	19.3
3H	17.7	18.4	18.1	18.7	19.0	17.9	18.6	18.2	18.8	19.1
4H	17.7	18.3	18.0	18.6	18.9	17.8	18.4	18.2	18.7	19.0
6H	17.6	18.1	17.9	18.5	18.8	17.8	18.3	18.1	18.6	19.0
8H	17.5	18.0	17.9	18.4	18.8	17.7	18.3	18.1	18.6	19.0
12H	17.5	18.0	17.9	18.3	18.7	17.7	18.2	18.1	18.6	19.0
8H 4H	17.5	18.0	17.9	18.4	18.8	17.7	18.2	18.1	18.5	18.9
6H	17.4	17.9	17.9	18.3	18.7	17.6	18.0	18.1	18.4	18.9
8H	17.4	17.8	17.9	18.2	18.6	17.6	18.0	18.1	18.4	18.9
12H	17.4	17.7	17.8	18.1	18.6	17.6	18.0	18.1	18.4	18.9
12H 4H	17.5	17.9	17.9	18.3	18.7	17.6	18.1	18.0	18.5	18.8
6H	17.4	17.8	17.8	18.2	18.6	17.6	17.9	18.0	18.4	18.8
8H	17.4	17.7	17.8	18.1	18.6	17.6	17.9	18.1	18.3	18.8
Variations with the observer position at spacings:										
S = 1.0H	+ 3.6 / -12.5					+ 3.2 / - 9.4				
1.5H	+ 6.1 / -12.5					+ 5.7 / - 9.4				
2.0H	+ 8.6 / - 4.6					+ 6.4 / - 2.7				

CIE Pub.117, 944.0 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.2)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-01

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 4 INCH

UTILIZATION FACTORS TABLE

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm		
NAME: 4 INCH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:80	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	88	82	78	88	82	78	87	82	78	75
0.80	96	90	86	95	90	86	94	89	86	82
1.00	100	95	91	99	94	91	98	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-01

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 4 INCH

ISOCANDELA DIAGRAM

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm		
NAME: 4 INCH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:80	Shielding Angle:

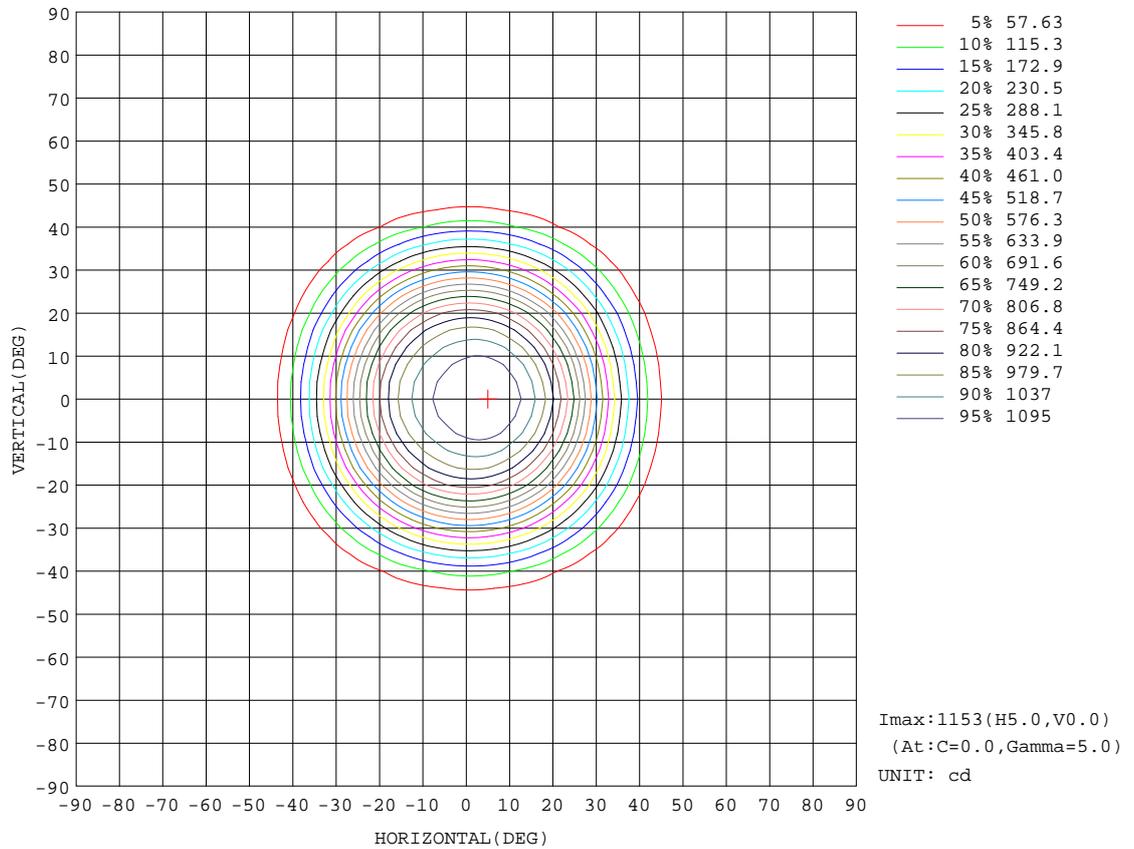


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-01

V(B) Range:-85 - 85DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.240m [K=1.0000]
 Remarks: 4 INCH

AAI Figure

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm		
NAME: 4 INCH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:80	Shielding Angle:

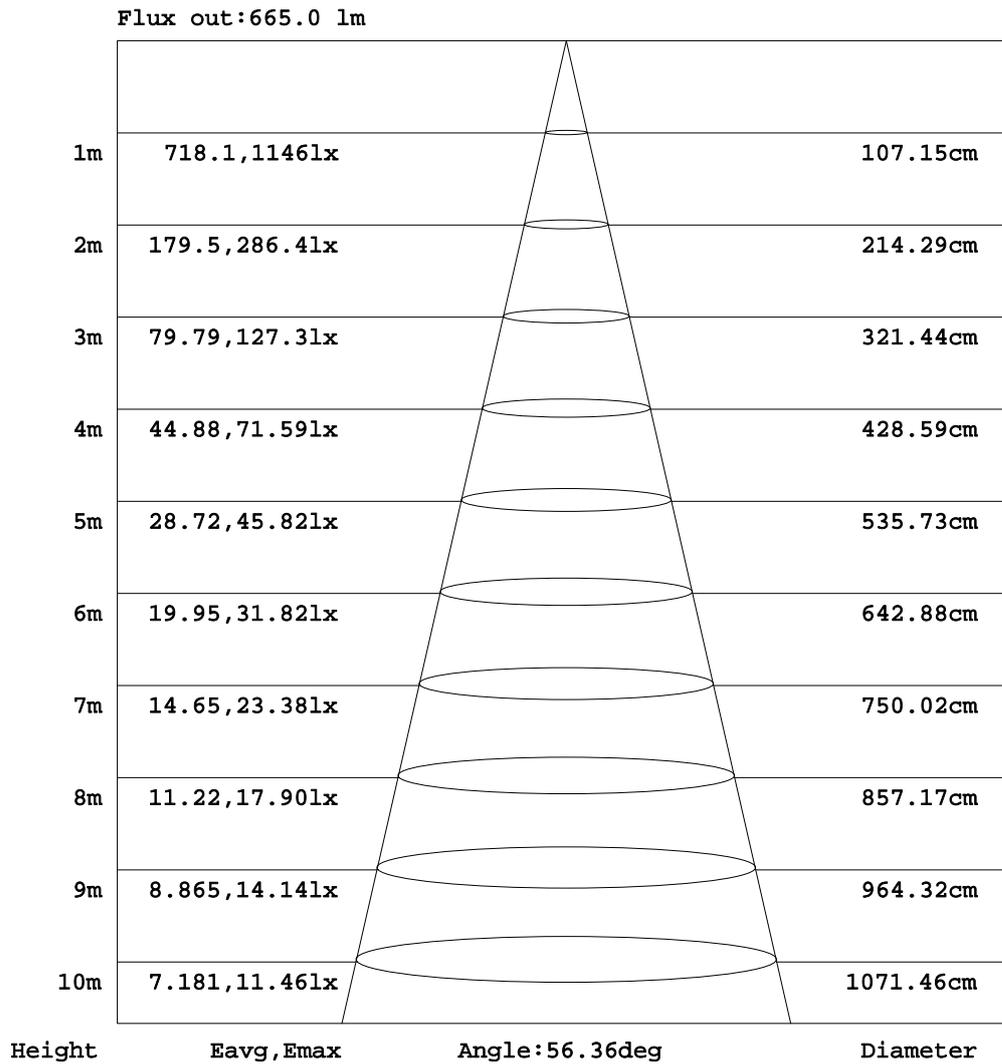


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-01

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 4 INCH

ISOLUX DIAGRAM

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm		
NAME: 4 INCH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:80	Shielding Angle:

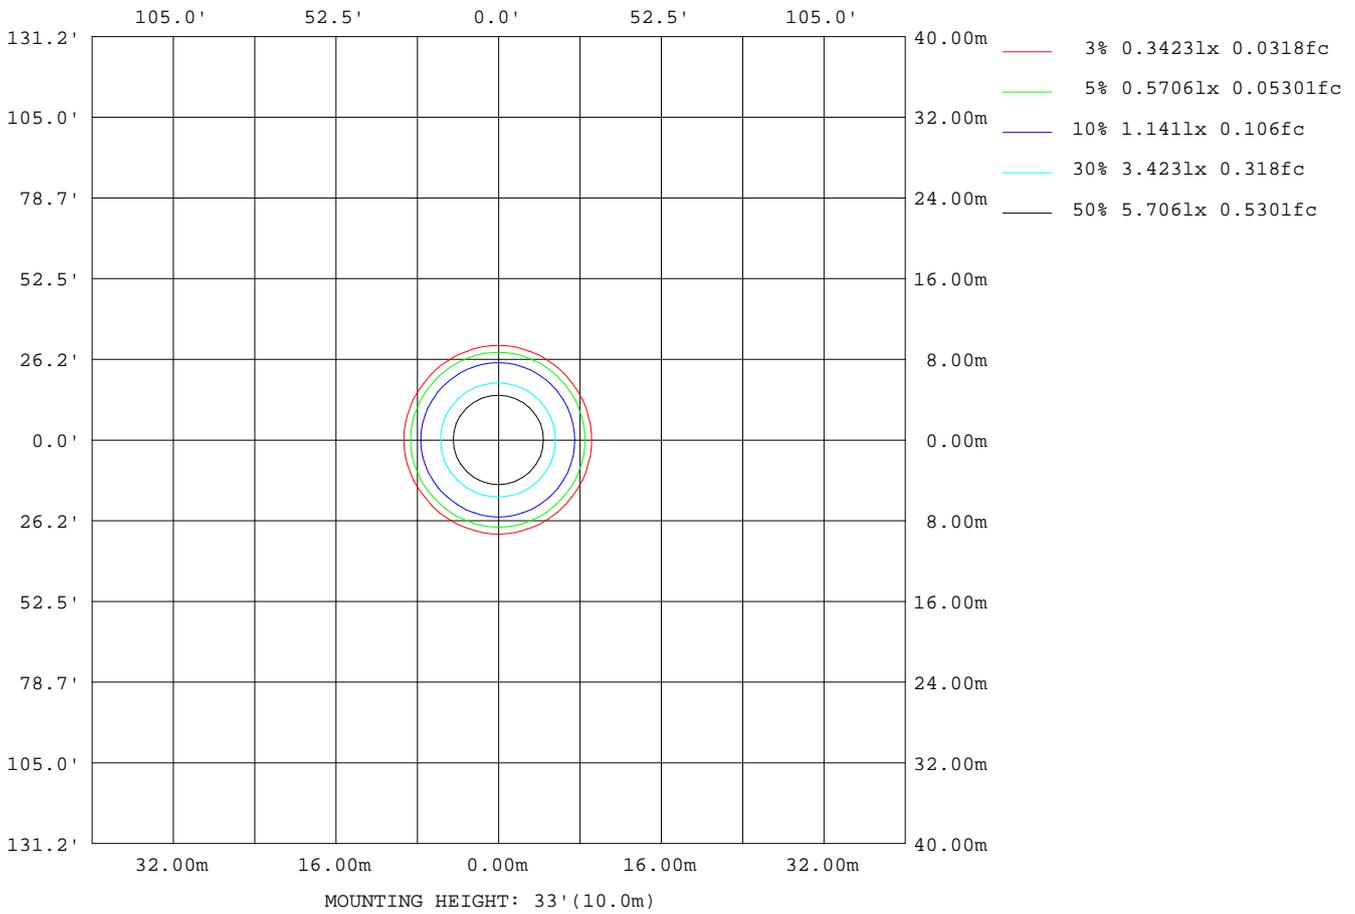

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-01

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 4 INCH

LED Avg.L Report

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm		
NAME: 4 INCH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:80	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	700
L_0~180(75)av	671
L_0~180(85)av	753
L_90~270(65)av	1046
L_90~270(75)av	1205
L_90~270(85)av	1302
L_45(65)av	893
L_45(75)av	1035
L_45(85)av	2110

Standard: GB/T 29293-2012

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-01

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 4 INCH

Planar Illuminance Curve

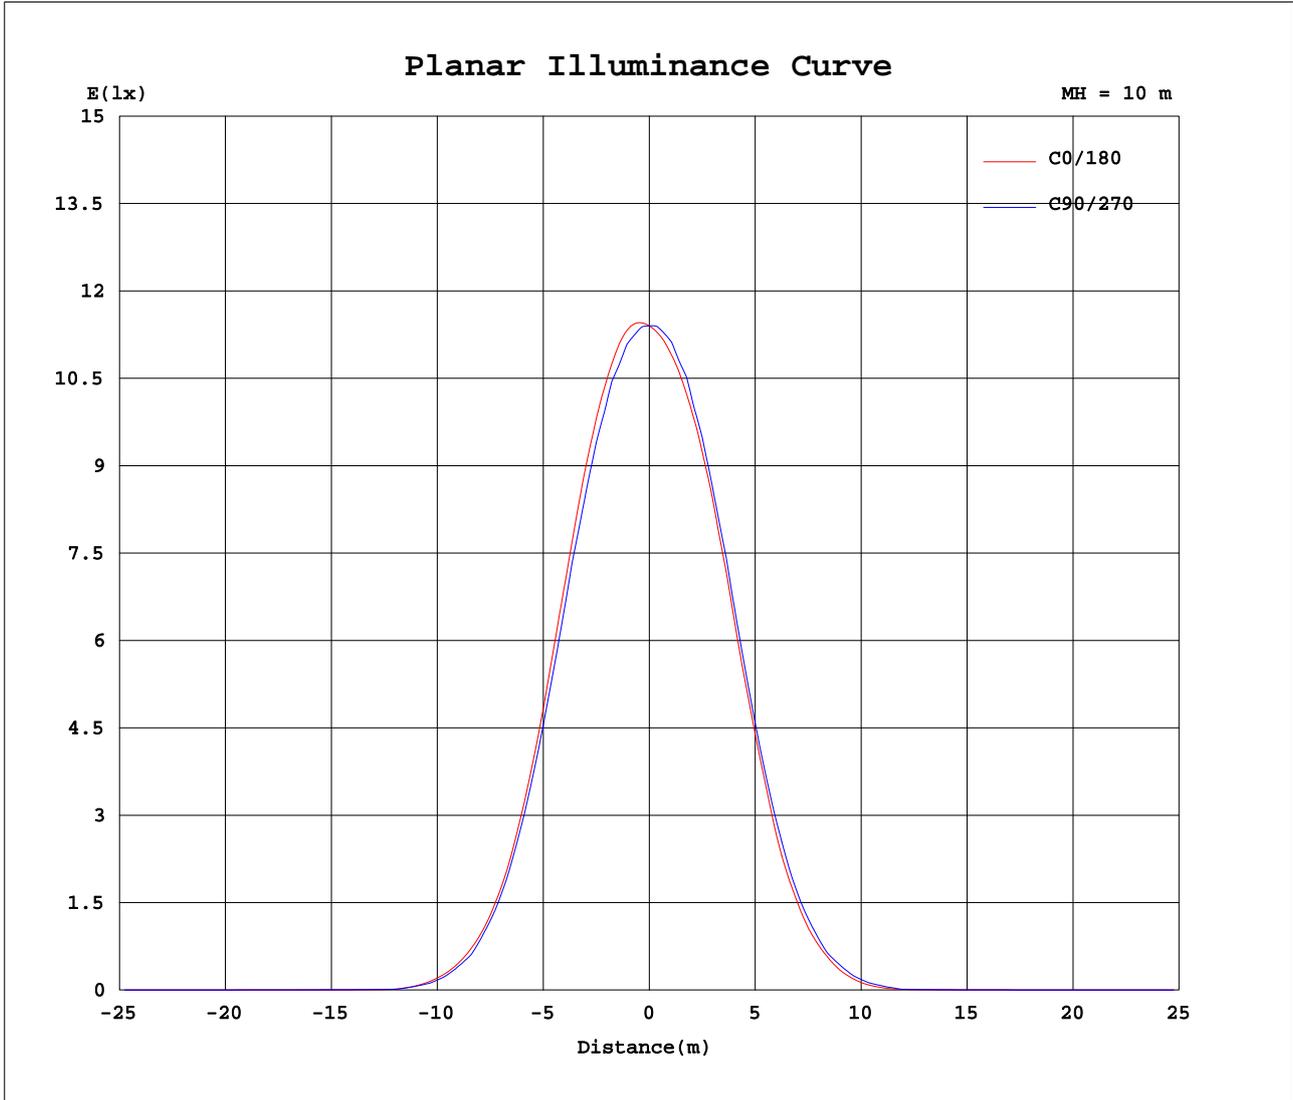

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-01

V(B) Range:-85 - 85DEG
 V(B) Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.240m [K=1.0000]
 Remarks: 4 INCH

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.40V I:0.0514A P:10.934W PF:0.9235 Freq:50.00Hz Lamp Flux:943.981x1 lm		
NAME: 4 INCH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:80	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140	1140
5	1153	1151	1149	1147	1146	1145	1145	1144	1144	1143	1142	1141	1139	1138	1136	1135	1133	1131	1130
10	1126	1118	1111	1111	1115	1116	1110	1106	1106	1106	1106	1105	1103	1102	1100	1099	1098	1096	1094
15	1056	1037	1035	1047	1033	1028	1037	1032	1026	1026	1027	1024	1019	1016	1016	1015	1013	1011	1008
20	928	890	911	893	899	903	891	903	889	884	893	889	881	879	884	886	887	886	884
25	744	699	720	709	713	714	706	706	712	697	717	708	695	702	706	704	700	699	698
30	528	496	483	511	505	485	514	488	512	488	508	494	493	501	499	495	493	493	495
35	318	302	293	288	289	306	305	289	309	292	310	293	302	305	298	294	296	296	296
40	160	155	154	154	156	153	143	140	153	143	150	142	150	146	143	144	142	139	137
45	58.9	49.7	45.5	45.5	48.7	48.6	46.3	44.9	51.4	49.1	48.3	48.2	48.9	48.5	50.1	49.4	49.4	49.0	48.8
50	7.63	4.49	6.91	6.14	5.25	5.78	6.02	6.33	7.95	6.45	8.56	9.15	7.07	9.92	11.3	10.1	8.09	6.53	6.05
55	2.52	2.45	2.39	2.56	2.45	2.59	2.71	2.78	2.88	3.03	3.20	3.26	3.40	3.60	3.69	3.77	3.88	3.95	3.98
60	1.82	1.80	1.80	1.85	1.82	1.95	2.01	2.13	2.27	2.33	2.48	2.59	2.73	2.82	2.93	3.05	3.14	3.16	3.16
65	1.39	1.34	1.38	1.38	1.48	1.53	1.66	1.75	1.86	1.99	2.07	2.19	2.28	2.40	2.54	2.67	2.76	2.79	2.78
70	1.10	1.08	1.08	1.16	1.25	1.35	1.47	1.56	1.66	1.74	1.84	1.91	2.00	2.10	2.20	2.33	2.44	2.49	2.46
75	0.84	0.80	0.86	1.01	1.15	1.26	1.33	1.42	1.47	1.50	1.56	1.65	1.72	1.80	1.90	2.05	2.18	2.18	2.12
80	0.63	0.61	0.78	1.00	1.13	1.22	1.23	1.25	1.27	1.32	1.35	1.38	1.44	1.52	1.62	1.78	1.91	1.91	1.83
85	0.40	0.57	0.93	1.04	1.16	1.16	1.14	1.11	1.09	1.10	1.11	1.16	1.09	1.01	0.95	0.95	0.94	0.87	0.80
90	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-12-01

V(B) Range:-85 - 85DEG
V(B) Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.240m [K=1.0000]
Remarks: 4 INCH

