
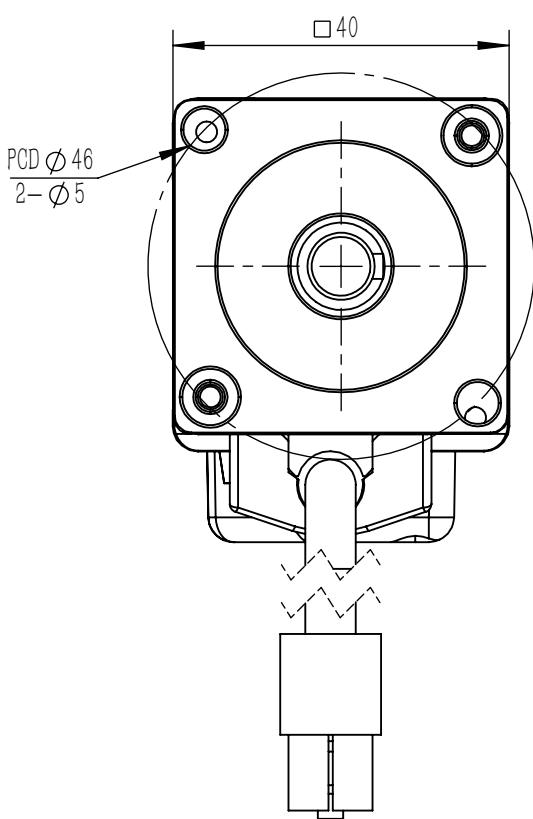


REVISIONS 修订栏		
REV. 版本号	DESCRIPTION 描述	DATE 日期
	首次发布	2023. 1. 30

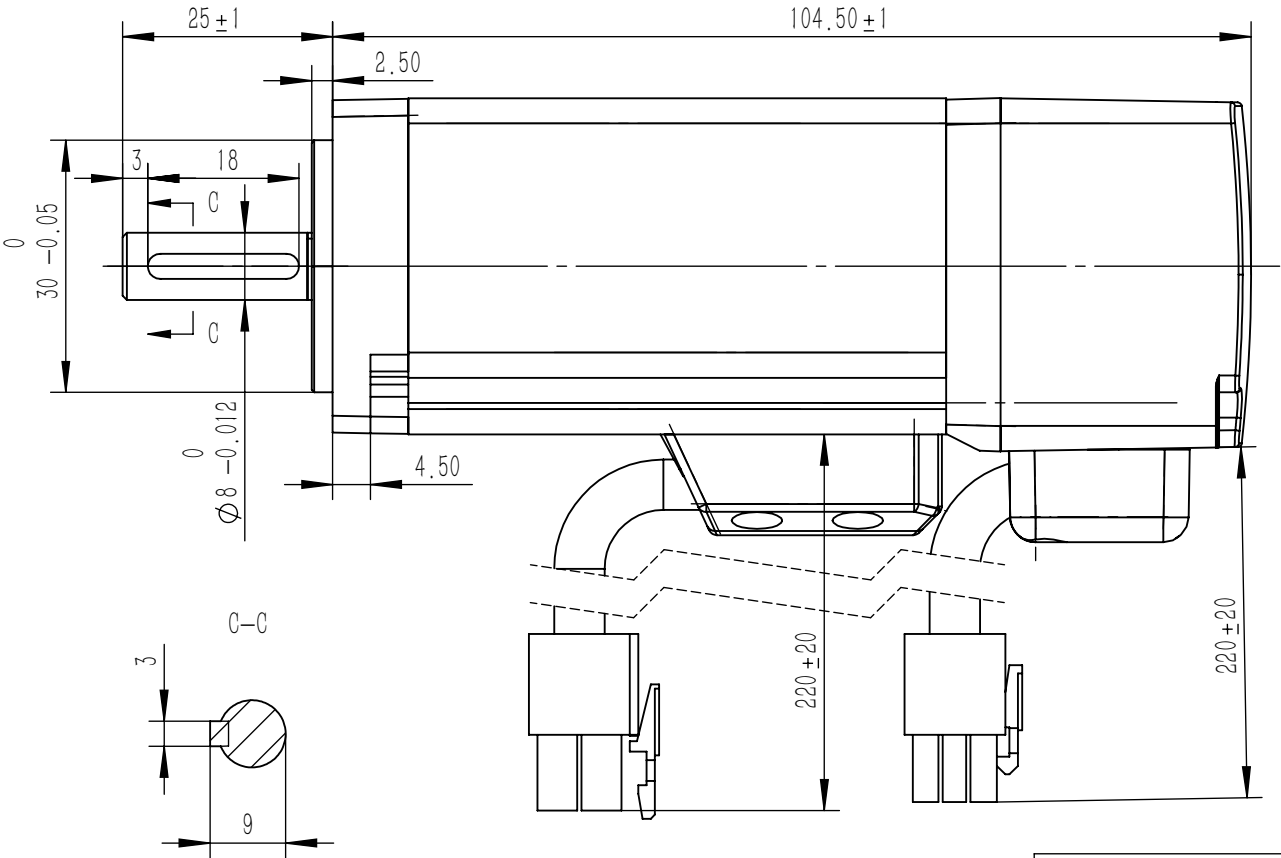

Technial parameters技术参数			
Rated power 额定功率	100W	Anti-potential 反电势	31V/1000rpm
Rated voltage 额定电压	220VAC	Torque constant 转矩常数	0.32N.m/A
Rated current 额定电流	1.0A	Wire resistance 线电阻	22.40hms
Rated torque 额定转矩	0.32N.m	Electrical timeconstant 电气时间常数	1.9ms
Rated speed 额定转速	3000rpm	The number of poles 极数	4
Peak speed 峰值转速	5000rpm	Number of encoder lines 编码器线数	17bit
Rotor inertia 转子惯量	0.034X10 kg.m	Insulation class 绝缘等级	F(155)
Protection class 防护等级	IP65	Instantaneous maximum torque 瞬时最大转矩	0.96N.m
		Linear inductance 线电感	42.3m H
CUSTOMER 客户:		Title 标题:	
DESIGNED BY 设计:		Guangzhou HanBuild motor Co. LTD	
DATE 日期:		PART NUMBER 图号:	
		40SS10	

DIMENSIONS ARE IN MILLIMETERS.
尺寸单位为毫米 (mm).
TOLERANCES AS BELOW:
未注公差按以下标准:

DECIMALS: X ±0.50
DECIMALS: X.X ±0.25
DECIMALS: X.XX ±0.13
DECIMALS: X.XXX ±0.075
ANGLES: ±2°