

QINGLONG

INVERTER GENERATOR/LAWN MOWER/TILLER

2024/2025



台州北极星科技有限公司
Taizhou Northstar Technology Co., LTD

台州庆隆机电有限公司
Taizhou Qinglong Machinery&electric Co.,LTD

No.799,Haixun Road,Dongbu New Area,Taizhouwan New District,Taizhou,Zhejiang,China.

Tel: +86 (576) 81875588, +86 (576) 88120521, +86 (576) 81875688

Fax: +86 (576) 81875598

Email:info@qinglongxs.com

Http://www.qinglongpower.com/



 **BEIJI XING**

ABOUT QINGLONG

Taizhou Qinglong Machinery & Electric Co., LTD

Founded in: 2008

Location: Taizhou City, Zhejiang Province, China

Products: Inverter Generators, Garden Machinery, Robotic Pool Cleaners

A strong R&D team.

A reliable quality control system.

We are always innovative.

We are always improving.

We are looking forward to working with you in long terms.

Let's make our businesses easier.

And keep them profitable.





PURE SINE WAVE POWER
SUITABLE FOR
CAMPING, RV, JOB SITE,
AND HOME USE



GASOLINE INVERTER GENERATORS

INVERTER

GENERATOR QL1000i

LIGHTWEIGHT & ERGONOMIC DESIGN

8.5 Kg only, very easy to carry around

EFFICIENT AIR-COOLING SYSTEM

Extend the using time of the machine

ONE-PIECE ALTERNATOR

Lightweight & rugged

OUTSTANDING INVERTER TECHNOLOGY


Stable pure sine wave electricity output

RUGGED SEE-THROUGH FUEL TANK

3.5L, filled with gasoline mixing 2-stroke oil




INVERTER GENERATOR	QL1000i
Rated power / Max. power	0.8KW / 1.0KW
Engine type	Air cooled,2-stroke,single cylinder
Displacement	42.7cc
Bore*Stroke	40*34mm
Compression ratio	7.6:1
Starting system	Recoil starter
Fuel tank capacity	3.5L
1/2 load continuous running time	4.5h
Noise(7m)	65dB
Dimensions	320*250*330mm
Net weight	8.5Kg
Container loading	20GP / 840PCS 40HQ / 2000PCS

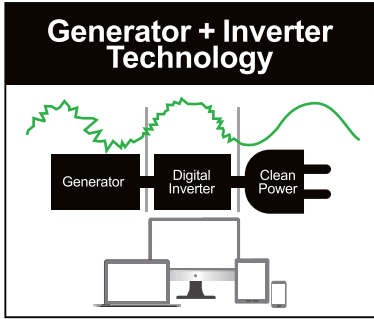

INVERTER

GENERATOR QL2000i/QL2000i-1



INTELLIGENT INVERTER TECHNOLOGY

Delivers clean electricity power with high efficient, parallel model capability.

ENCLOSED SILENT DESIGN

Fine tuned for a pleasant use experience

HIGH PERFORMANCE ENGINE WITH DUAL WIND CHANNEL

Powerful, great cooling system

ECO MODE SWITCH

Less waste, quieter and a longer run time

OUTSTANDING STARTING SYSTEM

Start with one easy pull



QL2000i




QL2000i-1

INVERTER GENERATOR	QL2000i	QL2000i-1
Rated power / Max. power	1.8KW / 2.0KW	1.8KW / 2.0KW
DC output	12 V 8.3 A	12 V 8.3 A
Engine type	Air cooled,4-stroke,OHV,single cylinder	Air cooled,4-stroke,OHV,single cylinder
Displacement	79.7cc	79.7cc
Bore*Stroke	48.6*43mm	48.6*43mm
Speed	3300-4500rpm	3300-4500rpm
Starting system	Recoil starter	Recoil starter
Fuel tank capacity	4L	4L
1/2 load continuous running time	6h	6h
Noise(7m)	59dB	59dB
Dimensions	480*285*420mm	480*285*420mm
Net weight	21.5Kg	22Kg
Container loading	20GP / 360PCS 40HQ / 740PCS	20GP / 280PCS 40HQ / 725PCS

INVERTER

GENERATOR QL3000i/QL4000i



INTELLIGENT INVERTER TECHNOLOGY

Delivers clean electricity power with high efficient, parallel model capability.

ENCLOSED SILENT DESIGN

Fine tuned for a pleasant use experience

HIGH PERFORMANCE ENGINE WITH DUAL WIND CHANNEL

Powerful, great cooling system

ECO MODE SWITCH

Less waste, quieter and a longer run time

OUTSTANDING STARTING SYSTEM

Start with one easy pull



QL3000i




QL4000i

INVERTER GENERATOR	QL3000i	QL4000i
Rated power / Max. power	2.7KW / 2.9KW	3.5KW / 3.8KW
DC output	12 V 8.3 A	12 V 8.3 A
Engine type	Air cooled,4-stroke,OHV,single cylinder	Air cooled,4-stroke,OHV,single cylinder
Displacement	142.6cc	159.2cc
Bore*Stroke	65*45mm	65*48mm
Speed	3300-4500rpm	3300-4500rpm
Starting system	Recoil starter	Recoil starter
Fuel tank capacity	4L	4L
1/2 load continuous running time	5h	4h
Noise(7m)	59dB	59dB
Dimensions	480*285*420mm	480*285*420mm
Net weight	24Kg	24Kg
Container loading	20GP / 360PCS 40HQ / 740PCS	20GP / 360PCS 40HQ / 740PCS

INVERTER

GENERATOR QL3000ie/QL5000ie



INTELLIGENT INVERTER TECHNOLOGY

Delivers clean electricity power with high efficient, parallel model capability.

ENCLOSED SILENT DESIGN

Fine tuned for a pleasant use experience

HIGH PERFORMANCE ENGINE WITH DUAL WIND CHANNEL

Powerful, great cooling system

ECO MODE SWITCH

Less waste, quieter and a longer run time

OUTSTANDING STARTING SYSTEM

Start with one easy pull



QL3000ie



QL5000ie

INVERTER GENERATOR	QL3000ie	QL5000ie
Rated power / Max. power	2.7KW / 2.9KW	5.0KW / 5.2KW
DC output	12 V 8.3 A	12 V 8.3 A
Engine type	Air cooled,4-stroke,OHV,single cylinder	Air cooled,4-stroke,OHV,single cylinder
Displacement	142.6cc	236cc
Bore*Stroke	65*45mm	72*58mm
Speed	3300-4500rpm	3300-4500rpm
Starting system	Recoil starter / Electric starter	Recoil starter/Electric starter
Fuel tank capacity	15L	15L
1/2 load continuous running time	12h	10h
Noise(7m)	60dB	62dB
Dimensions	710*420*515mm	710*420*515mm
Net weight	41Kg	48Kg
Container loading	20GP/ 108PCS 40HQ / 300PCS	20GP/ 108PCS 40HQ / 300PCS

INVERTER

GENERATOR QL2000ix

INTELLIGENT INVERTER TECHNOLOGY

Intelligent inverter techonlogy, clean sine wave output with high efficiency.

LOW COST

The same price with non-inverter generators

COMPACT DESIGN

Easy to carry around by one person

OUTSTANDING STARTING SYSTEM

Start with one easy pull

LARGE TANK


A full tank fuel could last 15 hours @50% load

RUGGED AND RELIABLE ENGINE

500 hours life span design




INVERTER GENERATOR	QL2000ix
Rated power / Max. power	1.8KW / 2.0KW
Engine type	Air cooled,4-stroke,OHV,single cylinder
Displacement	119 cc
Speed	2600-3600rpm
Starting system	Recoil starter
Fuel tank capacity	10L
1/2 load continuous running time	15h
Noise(7m)	65dB
Dimensions	400*475*455mm
Net weight	21Kg
Container loading	20GP / 330PCS 40HQ / 720PCS

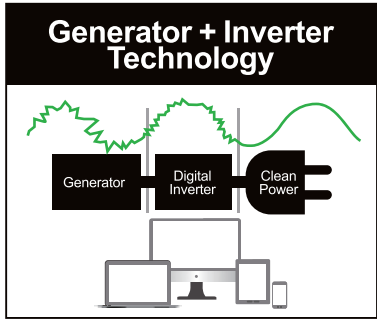

INVERTER

GENERATOR QL3000ix/QL4000ix



INTELLIGENT INVERTER TECHNOLOGY

Intelligent inverter techonlogy, clean sine wave output with high efficiency.

LOW COST

The same price with non-inverter generators

COMPACT DESIGN

Easy to carry around by one person

OUTSTANDING STARTING SYSTEM

Start with one easy pull

RUGGED AND RELIABLE ENGINE

500 hours life span design



QL3000ix




QL4000ix

INVERTER GENERATOR	QL3000ix	QL4000ix
Rated power / Max. power	2.8KW /3.0KW	3.8KW / 4.0KW
DC output	12 V 8.3 A	12 V 8.3 A
Engine type	Air cooled,4-stroke,OHV,single cylinder	Air cooled,4-stroke,OHV,single cylinder
Displacement	223cc	223cc
Bore*Stroke	72*55mm	72*55mm
Speed	2600-3600rpm	2600-3600rpm
Starting system	Recoil starter	Recoil starter
Fuel tank capacity	8L	8L
1/2 load continuous running time	9h	7h
Noise(7m)	69dB	69dB
Dimensions	400*475*455mm	400*475*455mm
Net weight	25Kg	26Kg
Container loading	20GP / 330PCS 40HQ / 720PCS	20GP / 330PCS 40HQ / 720PCS

INVERTER

GENERATOR QL3500ig/QL4500ig



INTELLIGENT INVERTER TECHNOLOGY

Intelligent inverter technology, clean sine wave output with high efficiency.

POWERFUL ENGINE

Assemble with 212/223 cc engine

LARGE FUEL TANK

Capacity 13 litre

OUTSTANDING STARTING SYSTEM

Start with one easy pull

SMART CONTROL PANEL

Socket, DC protector, Eco switch, Engine switch, Fuel switch, and Stroke all in a panel, very easy to handle the generator

FUEL GAUGE ON THE TOP

Indicate volume of fuel, easy to know when to refuel



QL3500ig




QL4500ig

INVERTER GENERATOR	QL3500ig	QL4500ig
Rated power / Max. power	3.2KW / 3.5KW	3.8KW / 4.0KW
DC output	12 V 8.3 A	12 V 8.3 A
Engine type	Air cooled,4-stroke,OHV,single cylinder	Air cooled,4-stroke,OHV,single cylinder
Displacement	212cc	223cc
Bore*Stroke	70*55mm	72*55mm
Speed	2600-3600rpm	2600-3600rpm
Starting system	Recoil starter	Recoil starter
Fuel tank capacity	13L	13L
1/2 load continuous running time	13h	11h
Noise(7m)	69dB	69dB
Dimensions	520*440*470mm	520*440*470mm
Net weight	32Kg	33Kg
Container loading	20GP / 200PCS 40HQ / 525PCS	20GP / 200PCS 40HQ / 525PCS

INVERTER

GENERATOR QL5500ig/QL6500ig



INTELLIGENT INVERTER TECHNOLOGY

Intelligent inverter technology, clean sine wave output with high efficiency.

POWERFUL ENGINE

Assemble with 236 cc engine

LARGE FUEL TANK

Capacity 15 litre

OUTSTANDING STARTING SYSTEM

Start with one easy pull

SMART CONTROL PANEL

Socket, DC protector, Eco switch, Engine switch, Fuel switch, and Stroke all in a panel, very easy to handle the generator

FUEL GAUGE ON THE TOP

Indicate volume of fuel, easy to know when to refuel



QL5500ig



QL6500ig

INVERTER GENERATOR	QL5500ig	QL6500ig
Rated power / Max. power	4.8KW / 5.2KW	6KW / 6.2KW
DC output	12 V 8.3 A	12 V 8.3 A
Engine type	Air cooled,4-stroke,OHV,single cylinder	Air cooled,4-stroke,OHV,single cylinder
Displacement	236cc	282.6cc
Bore*Stroke	72*58mm	75*64mm
Speed	3500-4500rpm	3500-4500rpm
Starting system	Electric starting / Recoil starting	Electric starting / Recoil starting
Fuel tank capacity	18L	18L
1/2 load continuous running time	13 hours	11 hours
Noise(7m)	69dB	69dB
Dimensions	565*460*510mm	565*460*510mm
Net weight	42Kg	43Kg
Container loading	20GP / 180PCS 40HQ / 480PCS	20GP / 180PCS 40HQ / 480PCS

GAS POWERED INVERTER GENERATOR

QL2000i GAS

INTELLIGENT INVERTER TECHNOLOGY

Delivers clean electricity power with high efficient, parallel model capability.

SILENT DESIGN

Whisper quiet running noise at only 59 dB(a) at rated load

HIGH PERFORMANCE ENGINE WITH DUAL WIND CHANNEL


Powerful, great cooling system

OUTSTANDING STARTING SYSTEM

Start with one easy pull



INVERTER GENERATOR	QL2000i GAS
Rated power / Max. power	100V:1.5 KW/1.7KW 230V:1.7 KW/1.9KW
DC output	12 V 8.3 A
Engine type	Air cooled,4-stroke,OHV,single cylinder
Displacement	79.7cc
Bore*Stroke	48.6*43mm
Speed	3300-4500rpm
Starting system	Recoil starter
Fuel	2 Butane Cassettes (or External Gas Tank)
1/2 load continuous running time	1.5 h - 2 Internal Cassettes
Noise(7m)	59dB
Dimensions	480*285*390mm
Net weight	21.5Kg
Container loading	20GP / 364PCS 40HQ / 745PCS

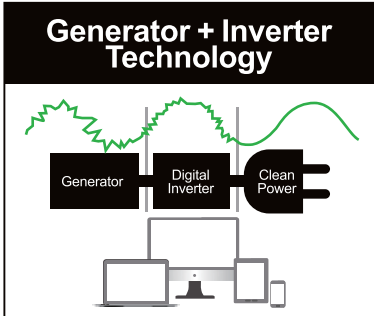

DC GENERATOR

QL2000dc

DC OUTPUT

12V to 72V DC output for DC air conditioners, solar system battery charging, and other DC devices.

SILENT DESIGN

Whisper quiet running noise at only 59 dB(a) at rated load

HIGH PERFORMANCE ENGINE WITH DUAL WIND CHANNEL


Powerful, great cooling system

OUTSTANDING STARTING SYSTEM


Start with one easy pull




INVERTER GENERATOR	QL2000dc
Rated power / Max. power	1.8 KW / 2.0 KW
DC output	24V, 75A; 36V, 50A; 48V, 37.5A
Engine type	Air cooled,4-stroke,OHV,single cylinder
Displacement	79.7cc
Bore*Stroke	48.6*43mm
Speed	2600-3600rpm
Starting system	Recoil Start / Auto Start /Remote Start
Fuel	4L
1/2 load continuous running time	6h
Noise(7m)	59dB
Dimensions	480*285*390mm
Net weight	21.5Kg
Container loading	20GP/364 PCS 40HQ/745 PCS

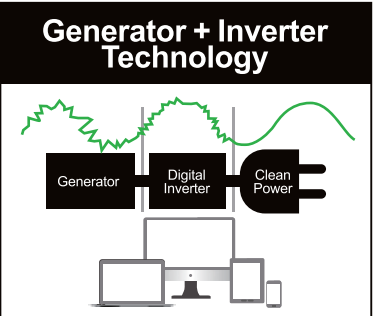




40V LITHIUM BATTERIES


POWERFUL EFFICIENT BLDC MOTOR


EASY TO USE AND MAINTAIN


HIGH GRASS COLLECTING RATE

LITHIUM BATTERY BLDC LAWN MOWERS



FACTORY MODEL	BJX4DM-320	BJX4DM-510
Lithium-ion Battery	2*4.0Ah, 40V	4*4.0Ah, 40V
Motor Type	Brushless Motor	Brushless Motor
No-load RPM	2750-3050 RPM	2750-3050 RPM
No-load Running Time	30 mins	40 mins
Cutting Width	320 mm (13 in)	510 mm (20 in)
Height Adjustment	25-40-55 mm	25-75 mm (7 positions)
Grass Collector	30L Plastic	55L Half Plastic
Net Weight (without Battery)	10 Kg	22 Kg
Packing Size	650*440*405 mm	820*580*435
Container loading quantity	594 sets/40' HQ	324 sets/40' HQ

ELECTRIC LAWN MOWER




FACTORY MODEL	BJX4AM-320
Rated Voltage	AC 230-240V/50Hz
Rated Power	1200W
Motor Type	Induction
No-load RPM	3300 RPM
Cutting Width	320 mm (13 in)
Height Adjustment	25-40-55 mm
Grass Colletor	30L Plastic
Net Weight	9 KG
Packing Size	610*420*320
Container loading quantity	832 sets/40' HQ



4 IN 1

• MOWING • CATCHING • MULCHING • SIDE DISCHARGE



16 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXBM41-80/BJXBM41-99	BJXDM41-80/BJXDM41-99
Drive system	Hand Push	Hand Push
Engine manufacturer	Chinese Engine	Chinese Engine
Engine model	1P52FA/1P56FA	1P52FA/1P56FA
Engine power info (cc/rpm)	79.8CC/1.5kw/3000rpm 99.0CC/1.8kw/3000rpm	79.8CC/1.5kw/3000rpm 99.0CC/1.8kw/3000rpm
Fuel tank volume (L)	1.0L	1.0L
Oil volume (L)	0.45L	0.45L
Deck material	Plastic	Steel
Cutting width (mm/inches)	406mm/16"	406mm/16"
Cutting height adjustment	Individual height adjsutment:3 positions	Individual height adjsutment:3 positions
Cutting height (mm)	25-65mm with 3 positions	25-65mm with 3 positions
Wheel size (inches)(Front/rear)	6 inch (front)/6 inch (rear)	6 inch (front)/6 inch (rear)
Function	rear discharge	rear discharge
Grass collector capacity (l)	45L	45L
Grass collector type	nylon bag	nylon bag
Packing size (mm)	660*465*380	660*465*380
N.W.(KG)	17.5	18.5
G.W.(KG)	19.5	20.5
Container loading quantity	620sets/40' HQ	620sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

16 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXHM41-80/BJXSM41-80	BJXHM41-99/BJXSM41-99
Drive system	Hand Push/Self-propelled	Hand Push/Self-propelled
Engine manufacturer	Chinese Engine	Chinese Engine
Engine model	1P52FA	1P56FA
Engine power info (cc/rpm)	79.8CC/1.5kw/3000rpm	99.0CC/1.8kw/3000rpm
Fuel tank volume (L)	1.0L	1.0L
Oil volume (L)	0.45L	0.45L
Deck material	Steel	Steel
Cutting width (mm/inches)	406mm/16"	406mm/16"
Cutting height adjustment	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	25-75mm with 8 positions	25-75mm with 8 positions
Wheel size (inches)(Front/rear)	6 inch (front)/8 inch (rear)	6 inch (front)/8 inch (rear)
Function	rear discharge	rear discharge
Grass collector capacity (l)	45L	45L
Grass collector type	nylon bag	nylon bag
Packing size (mm)	660*520*415	660*520*415
N.W.(KG)	22.5	22.5
G.W.(KG)	24.5	24.5
Container loading quantity	450sets/40' HQ	450sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

16 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXHM41-139/BJXSM41-139	BJXHM41-141/BJXSM41-141
Drive system	Hand Push/Self-propelled	Hand Push/Self-propelled
Engine manufacturer	LONCIN ENGINE	ZONGSHEN ENGINE
Engine model	LC 1P65FE	XP140L
Engine power info (cc/rpm)	139CC/2.4kw/3000rpm	141CC/2.2kw/3000rpm
Fuel tank volume (L)	0.9L	0.9L
Oil volume (L)	0.5L	0.45L
Deck material	Steel	Steel
Cutting width (mm/inches)	406mm/16"	406mm/16"
Cutting height adjustment	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	25-75mm with 8 positions	25-75mm with 8 positions
Wheel size (inches)(Front/rear)	6 inch (front)/8 inch (rear)	6 inch (front)/8 inch (rear)
Function	rear discharge	rear discharge
Grass collector capacity (l)	45L	45L
Grass collector type	nylon bag	nylon bag
Packing size (mm)	660*520*415	660*520*415
N.W.(KG)	22.5	22.5
G.W.(KG)	24.5	24.5
Container loading quantity	450sets/40' HQ	450sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

17 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXHM43-139/BJXSM43-139	BJXHM43-141/BJXSM43-141
Drive system	Hand Push/Self-propelled	Hand Push/Self-propelled
Engine manufacturer	LONCIN ENGINE	ZONGSHEN ENGINE
Engine model	LC 1P65FE	XP140L
Engine power info (cc/rpm)	139CC/2.4kw/3000rpm	141CC/2.2kw/3000rpm
Fuel tank volume (L)	0.9L	0.9L
Oil volume (L)	0.5L	0.45L
Deck material	Steel	Steel
Cutting width (mm/inches)	431mm/17"	431mm/17"
Cutting height adjustment	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	25-75mm with 8 positions	25-75mm with 8 positions
Wheel size (inches)(Front/rear)	6 inch (front)/8 inch (rear)	6 inch (front)/8 inch (rear)
Function	rear discharge	rear discharge
Grass collector capacity (l)	45L	45L
Grass collector type	nylon bag	nylon bag
Packing size (mm)	660*520*415	660*520*415
N.W.(KG)	23.5	23.5
G.W.(KG)	25.5	25.5
Container loading quantity	450sets/40' HQ	450sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

18 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXHM46-139/BJXSM46-139	BJXHM46-141/BJXSM46-141
Drive system	Hand Push/Self-propelled	Hand Push/Self-propelled
Engine manufacturer	LONCIN ENGINE	ZONGSHEN ENGINE
Engine model	LC 1P65FE	XP140L
Engine power info (cc/rpm)	139CC/2.4kw/3000rpm	141CC/2.2kw/3000rpm
Fuel tank volume (L)	0.9L	0.9L
Oil volume (L)	0.5L	0.45L
Deck material	Steel	Steel
Cutting width (mm/inches)	457mm/18"	457mm/18"
Cutting height adjustment	Central Height Adjustment:5positions	Central Height Adjustment:5positions
Cutting height (mm)	25-75mm with 5 positions	25-75mm with 5 positions
Wheel size (inches)(Front/rear)	7 inch (front)/8inch (rear)	7 inch (front)/8inch (rear)
Function	rear discharge	rear discharge
Grass collector capacity (l)	55L	55L
Grass collector type	nylon bag	nylon bag
Packing size (mm)	760*560*435	760*560*435
N.W.(KG)	24	24
G.W.(KG)	27	27
Container loading quantity	377sets/40' HQ	377sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

18 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXMM46-139 BJXPM46-139	BJXMM46-141 BJXPM46-141	BJXDPM46-139
Drive system	Hand Push/Self-propelled	Hand Push/Self-propelled	Self-propelled
Engine manufacturer	LONCIN ENGINE	ZONGSHEN ENGINE	LONCIN ENGINE
Engine model	LC 1P65FE	XP140L	LC 1P65FE (Electric start)
Engine power info (cc/rpm)	139CC/2.4kw/3000rpm	141CC/2.2kw/3000rpm	139CC/2.4kw/3000rpm
Fuel tank volume (L)	0.9L	0.9L	0.9L
Oil volume (L)	0.5L	0.5L	0.5L
Deck material	Steel	Steel	Steel
Cutting width (mm/inches)	457mm/18"	457mm/18"	457mm/18"
Cutting height adjustment	Central Height Adjustment:8positions	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	25-75mm with 8 positions	25-75mm with 8 positions	25-75mm with 8 positions
Wheel size (inches)(Front/rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)
Function	rear discharge, Side-discharge, Mulching,	rear discharge, Side-discharge, Mulching,	rear discharge, Side-discharge, Mulching,
Grass collector capacity (l)	60L	60L	60L
Grass collector type	half plastic grass catcher	half plastic grass catcher	half plastic grass catcher
Packing size (mm)	780*565*470	780*565*470	780*565*470
N.W.(KG)	30	30	30
G.W.(KG)	33	33	33
Container loading quantity	300sets/40' HQ	300sets/40' HQ	300sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V	CE, EMC, EURO V

20 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXAM51-139	BJXAM51-141
Drive system	Hand Push	Hand Push
Engine manufacturer	LONCIN ENGINE	ZONGSHEN ENGINE
Engine model	LC 1P65FE	XP140L
Engine power info (cc/rpm)	139CC/2.4kw/3000rpm	141CC/2.2kw/3000rpm
Fuel tank volume (L)	0.9L	0.9L
Oil volume (L)	0.5L	0.45L
Deck material	Steel	Steel
Cutting width (mm/inches)	508mm/20"	508mm/20"
Cutting height adjustment	Central Height Adjustment:5positions	Central Height Adjustment:5positions
Cutting height (mm)	25-75mm with 5 positions	25-75mm with 5 positions
Wheel size (inches)(Front/rear)	7 inch (front)/7 inch (rear)	7 inch (front)/7 inch (rear)
Function	side-discharge, Mulching	side-discharge, Mulching
Grass collector capacity (l)	/	/
Grass collector type	/	/
Packing size (mm)	700*560*370	700*560*370
N.W.(KG)	20	20
G.W.(KG)	22	22
Container loading quantity	476sets/40' HQ	476sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

20 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXHM51-139 BJXSM51-139	BJXHM51-141 BJXSM51-141	BJXHM51-159 BJXSM51-159
Drive system	Hand Push/Self-propelled	Hand Push/Self-propelled	Hand Push/Self-propelled
Engine manufacturer	LONCIN ENGINE	ZONGSHEN ENGINE	ZONGSHEN ENGINE
Engine model	LC 1P65FE	XP140L	XP160L
Engine power info (cc/rpm)	139CC/2.4kw/3000rpm	141CC/2.2kw/3000rpm	159CC/2.6kw/3000rpm
Fuel tank volume (L)	0.9L	0.9L	1.4L
Oil volume (L)	0.5L	0.45L	0.45L
Deck material	Steel	Steel	Steel
Cutting width (mm/inches)	508mm/20"	508mm/20"	508mm/20"
Cutting height adjustment	Central Height Adjustment: 8 positions	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	25-75mm with 8 positions	25-75mm with 8 positions	25-75mm with 8 positions
Wheel size (inches)(Front/rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)
Function	rear discharge.	rear discharge.	rear discharge.
Grass collector capacity (l)	55L	55L	55L
Grass collector type	nylon bag	nylon bag	nylon bag
Packing size (mm)	820*580*435	820*580*435	820*580*435
N.W.(KG)	27.5	27.5	27.5
G.W.(KG)	30.5	30.5	30.5
Container loading quantity	324sets/40' HQ	324sets/40' HQ	324sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V	CE, EMC, EURO V

20 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXMM51-141/BJXPM51-141	BJXMM51-159/BJXPM51-159
Drive system	Hand Push/Self-propelled	Hand Push/Self-propelled
Engine manufacturer	ZONGSHEN ENGINE	ZONGSHEN ENGINE
Engine model	XP140L	XP160L
Engine power info (cc/rpm)	141CC/2.6kw/3000rpm	159CC/2.6kw/3000rpm
Fuel tank volume (L)	0.9L	1.4L
Oil volume (L)	0.45L	0.45L
Deck material	Steel	Steel
Cutting width (mm/inches)	508mm/20"	508mm/20"
Cutting height adjustment	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	25-75mm with 8 positions	25-75mm with 8 positions
Wheel size (inches)(Front/rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)
Function	rear discharge, Side-discharge, Mulching,	rear discharge, Side-discharge, Mulching,
Grass collector capacity (l)	60L	60L
Grass collector type	half plastic grass catcher	half plastic grass catcher
Packing size (mm)	820*570*470	820*570*470
N.W.(KG)	30	30
G.W.(KG)	33	33
Container loading quantity	280sets/40' HQ	280sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

20 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXMM51-166/BJXPM51-166	BJXMM51-196/BJXPM51-196
Drive system	Hand Push/Self-propelled	Hand Push/Self-propelled
Engine manufacturer	LONCIN ENGINE	LONCIN ENGINE
Engine model	LC 1P65FE-2	V200
Engine power info (cc/rpm)	166CC/2.9kw/3000rpm	196CC/4.0kw/3000rpm
Fuel tank volume (L)	0.9L	1.0L
Oil volume (L)	0.5L	0.5L
Deck material	Steel	Steel
Cutting width (mm/inches)	508mm/20"	508mm/20"
Cutting height adjustment	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	25-75mm with 8 positions	25-75mm with 8 positions
Wheel size (inches)(Front/rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)
Function	rear discharge, Side-discharge, Mulching,	rear discharge, Side-discharge, Mulching,
Grass collector capacity (l)	60L	60L
Grass collector type	half plastic grass catcher	half plastic grass catcher
Packing size (mm)	820*570*470	820*570*470
N.W.(KG)	30	30
G.W.(KG)	33	33
Container loading quantity	280sets/40' HQ	280sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

20 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXDPM51-166	BJXDPM51-196
Drive system	Self-propelled	Self-propelled
Engine manufacturer	LONCIN ENGINE	LONCIN ENGINE
Engine model	LC 1P65FE-2 (Electric start)	V200 (Electric start)
Engine power info (cc/rpm)	166CC/2.9kw/3000rpm	196CC/4.0kw/3000rpm
Fuel tank volume (L)	0.9L	1.0L
Oil volume (L)	0.5L	0.5L
Deck material	Steel	Steel
Cutting width (mm/inches)	508mm/20"	508mm/20"
Cutting height adjustment	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	25-75mm with 8 positions	25-75mm with 8 positions
Wheel size (inches)(Front/rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)
Function	rear discharge, Side-discharge, Mulching,	rear discharge, Side-discharge, Mulching,
Grass collector capacity (l)	60L	60L
Grass collector type	half plastic grass catcher	half plastic grass catcher
Packing size (mm)	820*570*470	820*570*470
N.W.(KG)	30	30
G.W.(KG)	33	33
Container loading quantity	280sets/40' HQ	280sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

21 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXMM53-186 BJXPM53-186	BJXMM53-196 BJXPM53-196	BJXMM53-224 BJXPM53-224
Drive system	Hand Push/Self-propelled	Hand Push/Self-propelled	Hand Push/Self-propelled
Engine manufacturer	ZONGSHEN ENGINE	LONCIN ENGINE	LONCIN ENGINE
Engine model	XP190L	V200	LC 1P75F
Engine power info (cc/rpm)	186CC/3.2kw/3000rpm	196CC/4.0kw/3000rpm	224CC/4.5kw/3000rpm
Fuel tank volume (L)	1.4L	1.0L	1.4L
Oil volume (L)	0.45L	0.5L	0.5L
Deck material	Steel	Steel	Steel
Cutting width (mm/inches)	533mm/21"	533mm/21"	533mm/21"
Cutting height adjustment	Central Height Adjustment:8positions	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	30-80mm with 8 positions	30-80mm with 8 positions	30-80mm with 8 positions
Wheel size (inches)(Front/rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)
Function	mulching, Side-discharge, rear discharge.	mulching, Side-discharge, rear discharge.	mulching, Side-discharge, rear discharge.
Grass collector capacity (l)	60L	60L	60L
Grass collector type	half plastic grass catcher	half plastic grass catcher	half plastic grass catcher
Packing size (mm)	860*590*470	860*590*470	860*590*460
N.W.(KG)	31	31	34.5
G.W.(KG)	34	34	37.5
Container loading quantity	265sets/40' HQ	265sets/40' HQ	265sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V	CE, EMC, EURO V

21 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXDPM53-196	BJXDPM53-224
Drive system	Self-propelled	Self-propelled
Engine manufacturer	LONCIN ENGINE	LONCIN ENGINE
Engine model	V200 (Electric start)	1P75F (Electric start)
Engine power info (cc/rpm)	196CC/4.0kw/3000rpm	224CC/4.5kw/3000rpm
Fuel tank volume (L)	1.0L	1.4L
Oil volume (L)	0.5L	0.5L
Deck material	Steel	Steel
Cutting width (mm/inches)	533mm/21"	533mm/21"
Cutting height adjustment	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	30-80mm with 8 positions	30-80mm with 8 positions
Wheel size (inches)(Front/rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)
Function	mulching, Side-discharge, rear discharge.	mulching, Side-discharge, rear discharge.
Grass collector capacity (l)	60L	60L
Grass collector type	half plastic grass catcher	half plastic grass catcher
Packing size (mm)	860*590*460	900*610*470
N.W.(KG)	34.5	35.5
G.W.(KG)	37.5	38.5
Container loading quantity	265sets/40' HQ	215sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

22 INCH GASOLINE LAWN MOWERS



FACTORY MODEL	BJXPM56-196/BJXDPM56-196	BJXPM56-224/BJXDPM56-224
Drive system	Self-propelled	Self-propelled
Engine manufacturer	LONCIN ENGINE	LONCIN ENGINE
Engine model	V200 / V200 (Electric start)	1P75F / 1P75F (Electric start)
Engine power info (cc/rpm)	196CC/4.0kw/3000rpm	224CC/4.5kw/3000rpm
Fuel tank volume (L)	1.0L	1.4L
Oil volume (L)	0.5L	0.5L
Deck material	Steel	Steel
Cutting width (mm/inches)	559mm/22"	559mm/22"
Cutting height adjustment	Central Height Adjustment:8positions	Central Height Adjustment:8positions
Cutting height (mm)	30-80mm with 8 positions	30-80mm with 8 positions
Wheel size (inches)(Front/rear)	8 inch (front)/10 inch (rear)	8 inch (front)/10 inch (rear)
Function	mulching, Side-discharge, rear discharge.	mulching, Side-discharge, rear discharge.
Grass collector capacity (l)	60L	60L
Grass collector type	half plastic grass catcher	half plastic grass catcher
Packing size (mm)	900*610*470	900*610*470
N.W.(KG)	35.5	35.5
G.W.(KG)	38.5	38.5
Container loading quantity	215sets/40' HQ	215sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

GASOLINE LAWNMOWER OPTIONS

WHEELS



H-STYLE



Q-STYLE



W-STYLE

PANEL TYPES



B-B STYLE



B-Q STYLE



B-W STYLE

FRONT FACE STYLES



A-STYLE



B-STYLE



C-STYLE



H-Q STYLE



N-B STYLE



- Equipped with a high-power engine, it has strong power and can quickly cut large areas of grass.
- The unique seat design conforms to ergonomics and provides a comfortable driving experience for the operator.
- Equipped with a height adjustable cutting device, it can be precisely adjusted according to different lawn heights and needs.
- Equipped with a 150L Huge collection box, which automatically collects the grass clippings cut for easy cleaning and disposal.



Strong Stability



Simple



Durable



Energy Saving



RIDING LAWN MOWER

Model	BJXRM24D-224 (24")/BJXRM26D-224 (26")
Overall Design	
Net Weight (kg)	115±2KG
Gross Weight (kg)	125±2KG
Assembled Length X Height XWidth (mm)	1820*740*1090
Drive Type	Rear-wheel Drive
Turning Radius (in.)	18
Frame	Steel tubing, welded and powder coated
ENGINE	
Displacement (cc)	224cc
Engine Model	Dv224
Starting System	Recoil/E-start
Power MAX(kw)/Rated Speed	4.4KW/2800 rpm
DRIVING SYSTEM	
Forward Speed (km/h)	1.5/2.0/4.0/6.0Km/h
Maximum Reverse Speed ((km/h)	2.4Km/h
Tires	4-ply tubeless
CUTTING SYSTEM	
Cutting Width	24"& 26"
Number of Blades	1
Blade speed(rpm)	Max 2700
Blade brake	Yes
Catcher capacity(L)	150L
Cutting heights(mm)	35-75mm ±5mm with 5 grades
Height adjustment	Manual
Cutting Options	Mulching, side-discharge, Catching
OTHER FEATURES	
Battery info	20V, 2Ah
Charger Voltage/Current, time	21.8V/0.6A, 4.7 hours
Seat	Adjustable,integrated switch
Iron Stand Size (mm)	1480*760*865



Strong Stability



Simple



Durable



Energy Saving



GASOLINE ENGINE TILLERS



FACTORY MODEL	BJXT36-139	BJXT60-139	BJXT60-166
Engine manufacturer	LONCIN ENGINE	LONCIN ENGINE	LONCIN ENGINE
Engine model	LC 1P65FE	LC 1P65FE	LC 1P65FE-2
engine power info (cc/kw/rpm)	139CC/2.4kw/3000rpm	139CC/2.4kw/3000rpm	166CC/2.9kw/3000rpm
Fuel tank volume (l)	0.9L	0.9L	0.9L
Oil volume (l)	0.5L	0.5L	0.5L
Max working depth	260mm	260mm	260mm
Cutting width (mm)	36cm (4 blades)	59cm (6 blades)	59cm (6 blades)
Depth adjustment	3 positions	3 positions	3 positions
Packing size (mm)	710*380*660	710*380*660	710*380*660
N.W.(KG)	29	32	32
G.W.(KG)	32.5	35	35
Container loading quantity	406 sets/40' HQ	406 sets/40' HQ	406 sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V	CE, EMC, EURO V

GASOLINE ENGINE TILLERS



FACTORY MODEL	BJXT80-196	BJXT80-212
Engine	LONCIN H200	YH170/P
Engine Power	196CC/4.1kw/3600rpm	212CC/4.5kw/3600rpm
Fuel Tank Capacity (L)	3.0 L	3.5 L
Oil Tank Capacity (L)	0.6 L	0.6 L
Working Width	300-600-850 mm	300-600-850 mm
Blade Rotating Diameter (mm)	330	330
Working Depth	160~300 mm	160~300 mm
Driving Speed	F / N / R	F / N / R
Outpur Rotating Speed (rpm)	F:170, R:45	F:170, R:45
N.W.(KG)	54	54
Product Size (mm)	1210*810*1100 mm	1210*810*1100 mm
Packing Size (mm)	610*425*740 mm	610*425*740 mm
Container loading quantity	294 sets/40' HQ	294 sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V

GASOLINE ENGINE TILLERS



FACTORY MODEL	BJXT65-150	BJXT550G-212	BJXT1000G-212
Engine model	NP150	170F	170F
Tilling Scope(mm)	650	950	950
Tilling Depth(mm)	≥100	≥100	≥100
Gear Shifting	1	-1,0,1,2	-1,0,1,2
Driving Model	Gear	Belt	Gear
Gearbox Oil Capacity(L)	1.2	0.95	1.8
engine power info (cc/kw/rpm)	150CC/2.5kw/3600rpm	212CC/4.0kw/3600rpm	212CC/4.0kw/3600rpm
Fuel tank volume (l)	0.85L	3.6L	3.6L
Engine Oil volume (l)	0.4L	0.6L	0.6L
Packing size (mm)	1200*480*1000	1500*650*1100	1300*700*1250
N.W.(KG)	47.5	77	81
G.W.(KG)	50	80	84
Container loading quantity	390 sets/40' HQ	252 sets/40' HQ	275 sets/40' HQ
Certification	CE, EMC, EURO V	CE, EMC, EURO V	CE, EMC, EURO V