


Air-to-Liquid Thermoelectric Assembly

0200-AL-200-24-00 REV 00

Specifications:

Cooling Power Q _{cmax} (W)	200
Running Current (A)	14
Nominal Voltage (V)	24
Max Voltage (V)	27
Power Input (W)	336
Operating Temperature (°C)	-10 to 70
Weight (kg)	4
MTBF (fans-hrs)	70,000
Performance Tolerance	±10%

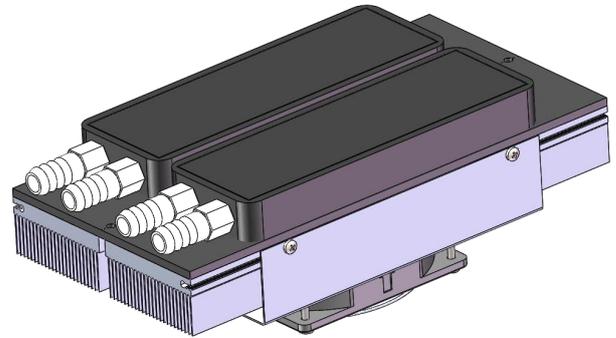

Features


- Compact design
- Precise temperature control
- Reliable solid-state operation
- DC operation
- RoHS compliant

Applications



- Analytical instrumentation
- Medical diagnostics
- Photonics laser systems
- Industrial instrumentation
- Food and beverage cooling

All products are manufactured in an ISO 9001:2008 & ISO/TS 16949:2009 certified facility and are designed to meet the cooling needs of many thermal management applications in the medical, analytical, industrial and telecom markets.

Performance Curve


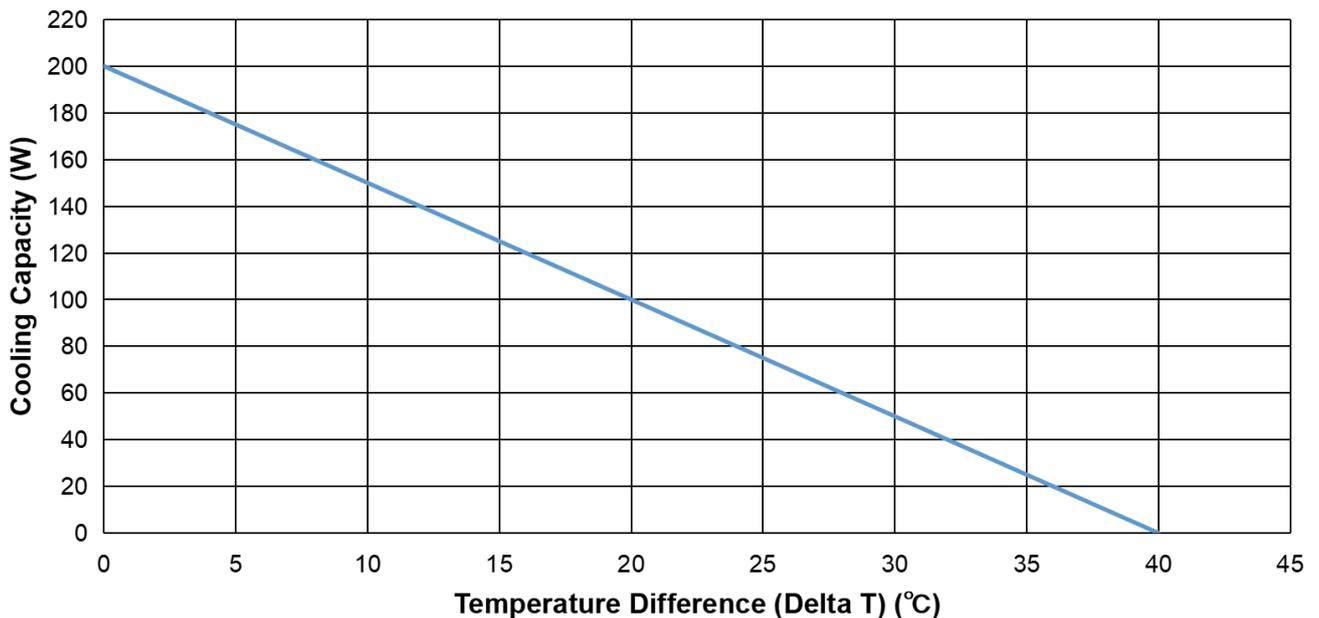


Mechanical Drawing

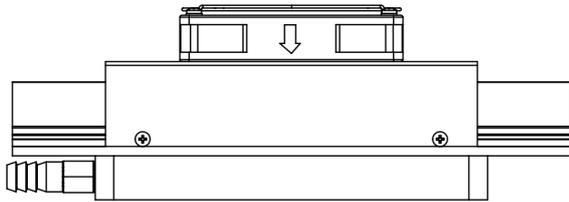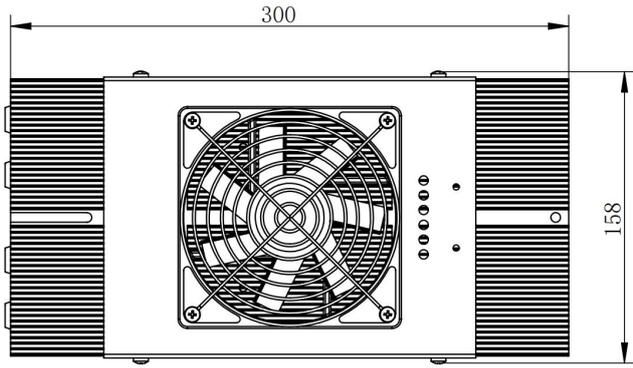


Cold side

Hot side

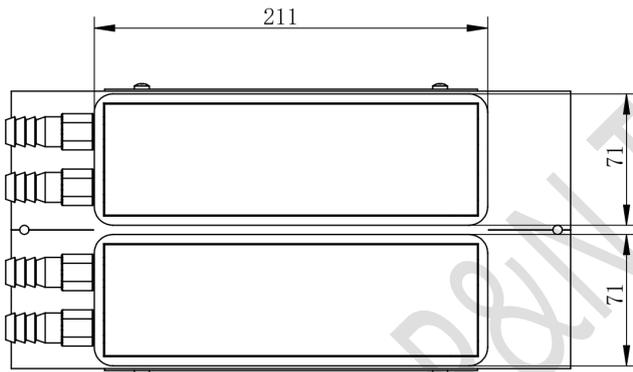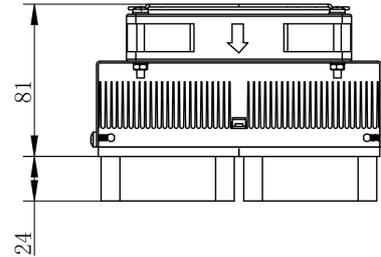

Wiring Schematic (Power Connector)

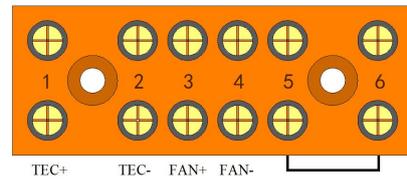

Service:

Fan impellers and heat sinks must be cleaned on regular intervals to reduce risk for overheating and reduction of cooling function.

Logbook

NO.	REVISION	Date	Version
1	Initial revision	2025.05.28	Rev00

Address: 5/F Xinfei Building 28th Xiangming Road, Torch (xiang'an) Hi-tech Zone, Xiamen Fujian China.

Sales Tel: +86-592-352 1988

Fax: +86-592-352 1989

Postcode: 361 101

Web: www.pengnantech.com