
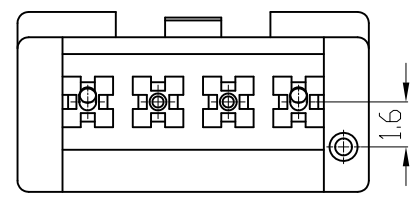
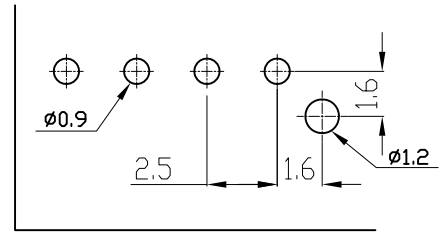
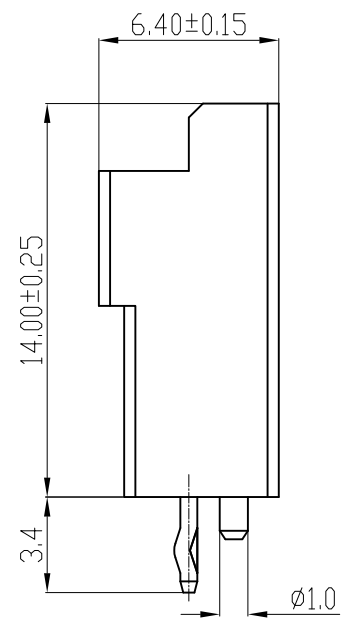


设计变更 REVISIONS

NO.	MARK	变更记录 DESCRIPTION	REV	DATE

备注 NOTES:

1. 材质 Material: 塑壳: PA66高阻燃+玻纤 UL94-V0 自然色, 铜针: 黄铜H65 表面镀锡;
Molded case: PA66 high flame retardant+glass fiber UL94-V0 Natural, Copper needle: brass H65 The surface of the tin plating
2. 额定电流 Current rating: 3.0A AC, DC
3. 额定电压 Voltage rating: 250V AC, DC
4. 接触电阻 Contact Resistance: $\leq 20m\Omega$
5. 绝缘电阻 Insulation resistance: $\geq 1000M\Omega$
6. 耐压 Withstanding voltage: 1000V.AC
7. 适用温度范围 Applicable Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

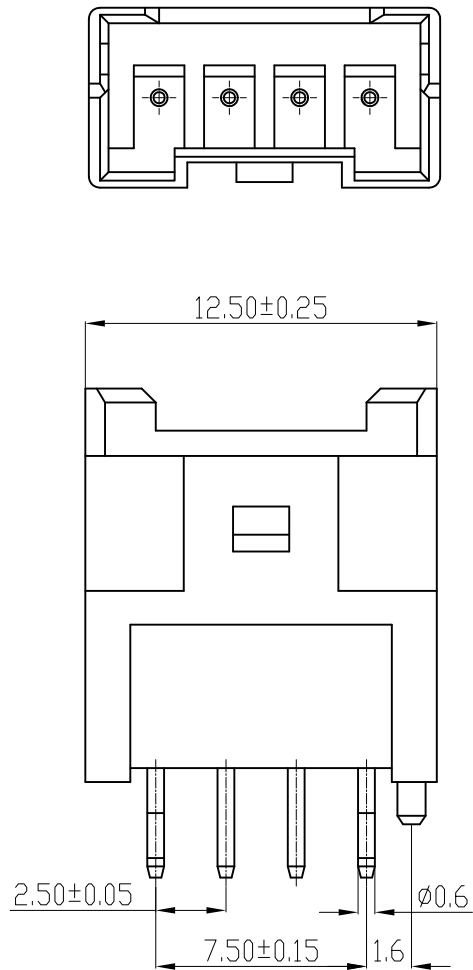

未注公差范围 No tolerance range is noted		
***	± 0.05	$\pm 0.5^{\circ}$
**	± 0.15	$\pm 1^{\circ}$
*	± 0.20	$\pm 2^{\circ}$
.	± 0.30	$\pm 3^{\circ}$

LX 温州市林鑫电子有限公司
WenZhou LinXin Electronic Co., Ltd

设计 DESIGN	许建丰	产品名称: PRODUCT NAME:	XA-4A
审核 AUDIT	邓小芳	产品料号: PART NO:	LX5A250W19-04
批准 APPD	罗尚润	客户料号: CUSTOMER P/N:	
		发行日期: Release date:	

UNITS	SCALE	SHEET	REV
mm	1:1	1/1	A/0