





设计变更 REVISIONS

NO.	MARK	变更记录 DESCRIPTION	REV	DATE

备注 NOTES:

1. 材质 :PA66 白色/黑色
Material: PA66 White/Black
2. 额定电压 :250V AC, DC
Voltage rating:250V AC, DC
3. 绝缘电阻 : $\geq 500\Omega$
Insulation resistance: $\geq 500\Omega$
4. 耐压 : 1500V
Withstanding voltage:1500V
5. 适配端子 :L250013-01 (02)PT (SHF-001 (2) T-0. 8BS)
Matched Terminal:L250013-01 (02)PT
(SHF-001 (2) T-0. 8BS)
适配塑壳:L250013-A04R (SM-NR)
Matched Housing: L250013-A04R (SM-NR)
适配锁片: L250013-BNS (SM系列)
Matched Retainer: L250013-BNS (SM Series)
6. 适用温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
Applicable Temperature Range: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
7. 环保要求: RoHS/REACH
Environmental requirements:RoHS/REACH

孔位(N) Poles	产品规格 Part Model	产品名称 Name	产品料号 Part No	尺寸 Dimension	
				A	B
2	L250013-A02P-V*	SM-2P	LX7V250*14-02	2.50	5.50
3	L250013-A03P-V*	SM-3P	LX7V250*14-03	5.00	8.00
4	L250013-A04P-V*	SM-4P	LX7V250*14-04	7.50	10.5
5	L250013-A05P-V*	SM-5P	LX7V250*14-05	10.0	13.0
6	L250013-A06P-V*	SM-6P	LX7V250*14-06	12.5	15.5
7	L250013-A07P-V*	SM-7P	LX7V250*14-07	15.0	18.0
8	L250013-A08P-V*	SM-8P	LX7V250*14-08	17.5	20.5
9	L250013-A09P-V*	SM-9P	LX7V250*14-09	20.0	23.0
10	L250013-A10P-V*	SM-10P	LX7V250*14-10	22.5	25.5
11	L250013-A11P-V*	SM-11P	LX7V250*14-11	25.0	28.0
12	L250013-A12P-V*	SM-12P	LX7V250*14-12	27.5	30.5

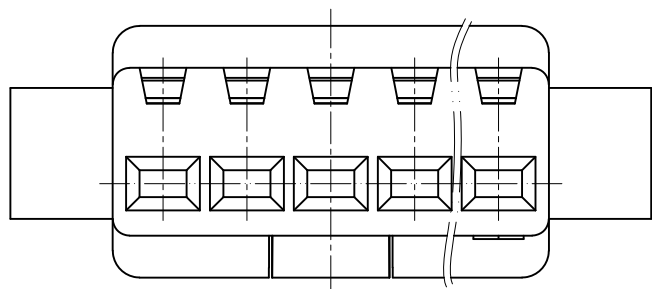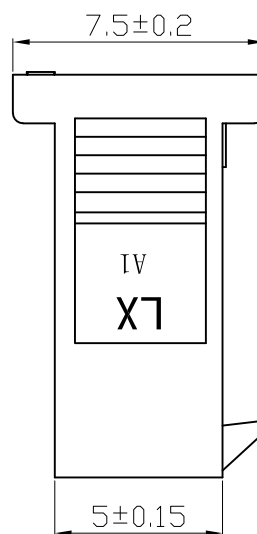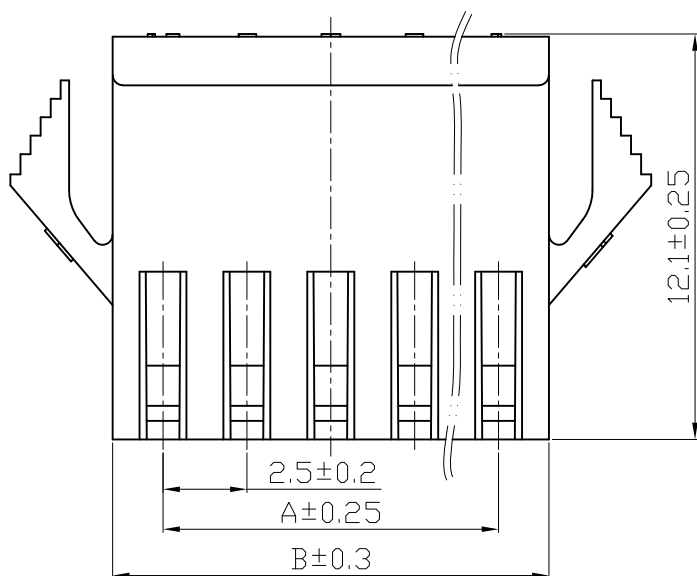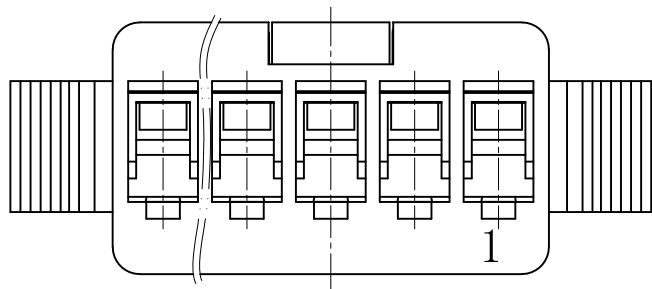

未注公差范围 No tolerance range is noted		
***	±0.05	±0.5°
**	±0.15	±1°
*	±0.20	±2°
.	±0.30	±3°

linsine 温州市林鑫电子有限公司
WenZhou LinXin Electronics Co., Ltd.

制图 DRAWING	邓小芳	产品规格: PART MODEL:	L250013-ANP-V*
	审核 AUDIT	吴晓平	产品名称: PRODUCT NAME:
产品料号: PART NO:			LX7V250*14-**
批准 APPD	赵成钢	客户料号: CUSTOMER P/N:	
		发行日期 Release date:	

	UNITS	SCALE	SHEET	REV
	mm	1:1	1/1	A/1