
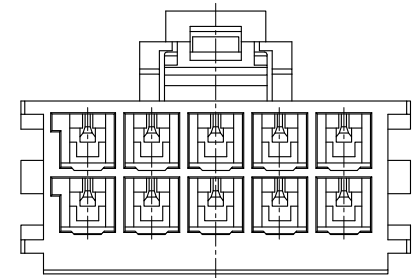
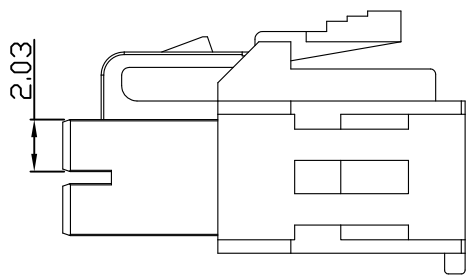
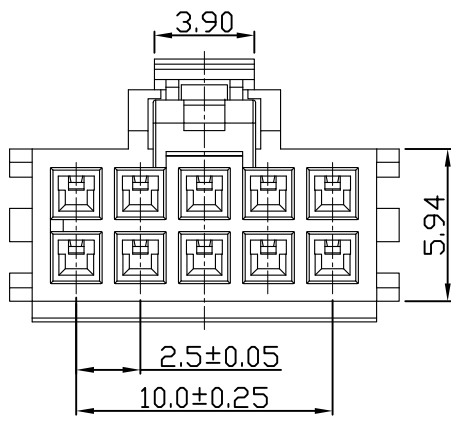


设计变更 REVISIONS				
NO.	MARK	变更记录 DESCRIPTION	REV	DATE

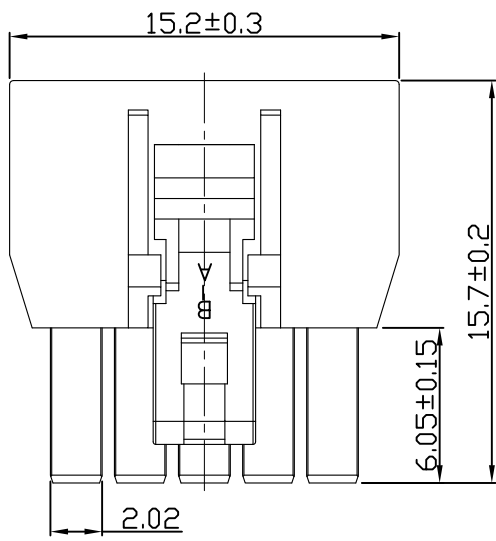

备注 NOTES:

1. 材质 Material: 塑壳: PA66 UL94V-0 黑色
Molded case: PA66 UL94V-0 Black,
2. 额定电流 Current rating: 4.0A AC, DC
3. 额定电压 Voltage rating: 250V AC, DC
4. 接触电阻 Contact Resistance: $\leq 10m\Omega$ 初始 (Initial)
5. 绝缘电阻 Insulation resistance: $\geq 10000M\Omega$
6. 耐压 Withstanding voltage: 1500V.AC
7. 适用温度范围 Applicable Temperature Range : $-25^{\circ}C \sim +85^{\circ}C$

未注公差范围 No tolerance range is noted			LX温州市林鑫电子有限公司 WenZhou LinXin Electronic Co., Ltd			
.***	± 0.05	$\pm 0.5^{\circ}$				
.**	± 0.15	$\pm 1^{\circ}$	产品名称: PRODUCT NAME:	105308-1210		
.*	± 0.20	$\pm 2^{\circ}$	产品料号: PART NO:	LX7V250K24-10		
.	± 0.30	$\pm 3^{\circ}$	客户料号: CUSTOMER P/N:			
制图 DRAWING	邓小芳		发行日期 Release date:			
审核 AUDIT	吴晓平					
批准 APPD	罗尚润					
				UNITS	SCALE	SHEET
				mm	1:1	1/1
						REV
						A/0