



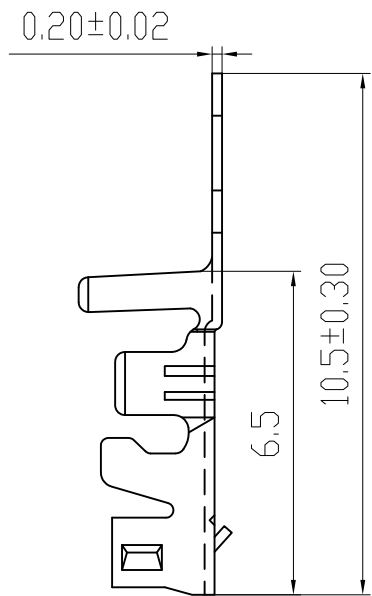


设计变更 REVISIONS				
NO.	MARK	变更记录 DESCRIPTION	REV	DATE

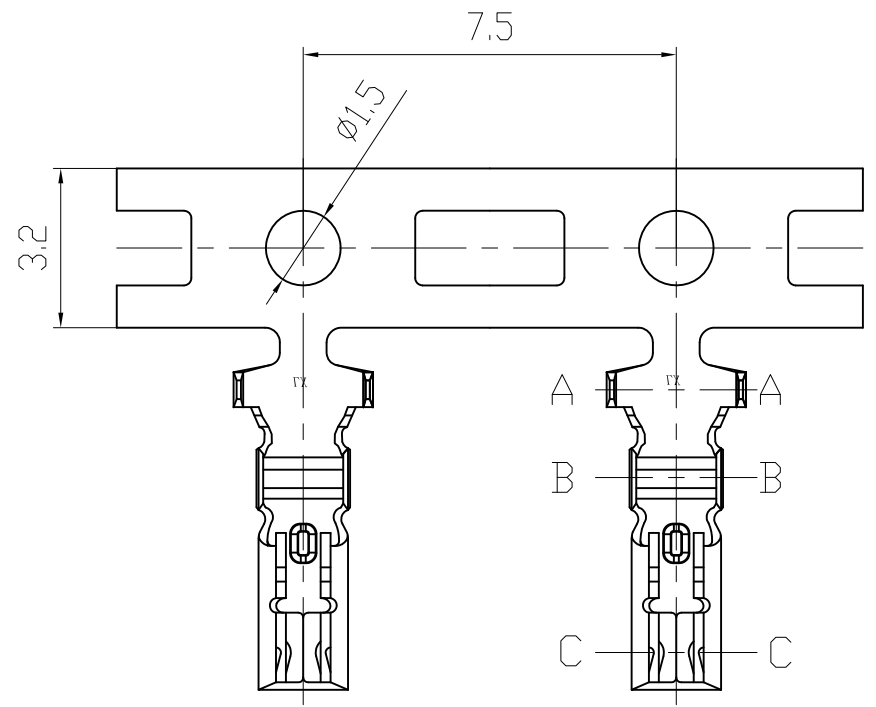

备注 NOTES:

1. 材质 Material: 磷铜 C5191 T=0.2 (Phosphor copper C5191 T=0.2)
2. 表面处理 Surface treatment: 电镀镍底表面镀锡
Nickel plating with tinned bottom surface
3. 额定电流 Current rating: 3.0A AC, DC
4. 额定电压 Voltage rating: 250V AC, DC
5. 接触电阻 Contact Resistance: $\leq 20\text{m}\Omega$
6. 绝缘电阻 Insulation resistance: $\geq 500\text{M}\Omega$
7. 耐压 Withstanding voltage: 1500V.AC
8. 适用线规 Apply to gauge: 见附表 (See table)
9. 端子与塑胶保持力 Terminal with plastic holding force: $\geq 10\text{N}$
10. 适用温度范围 Applicable Temperature Range: $-25^\circ\text{C} \sim +85^\circ\text{C}$

产品名称 Name	产品料号 Part No	尺寸 Dimension				压接范围 Wire Range
		A	B	C	D	
SXA-01T-P0.6	LX6N250006-01	2.70	3.00	1.80	1.45	AWG#24-20
SXA-001T-P0.6	LX6N250006-02	2.60	2.80	1.75	1.45	AWG#22-28

未注公差范围 No tolerance range is noted		
***	± 0.05	$\pm 0.5^\circ$
**	± 0.15	$\pm 1^\circ$
*	± 0.20	$\pm 2^\circ$
.	± 0.30	$\pm 3^\circ$

LX温州市林鑫电子有限公司
WenZhou LinXin Electronic Co., Ltd

制图 DRAWING	邓小芳	产品名称: PRODUCT NAME:	SXA-***T-P0.6
审核 AUDIT	吴晓平	产品料号: PART NO:	LX6N250006-***
批准 APPD	罗尚润	客户料号: CUSTOMER P/N:	
		发行日期 Release date:	

UNITS	SCALE	SHEET	REV
mm	1:1	1/1	A/1