


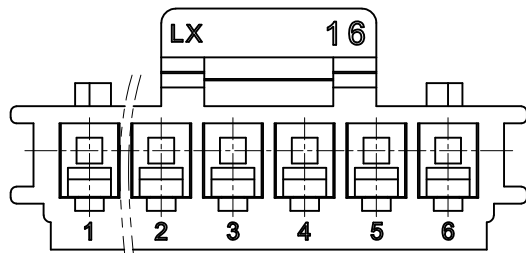


设计变更 REVISIONS

NO.	MARK	变更记录 DESCRIPTION	REV	DATE




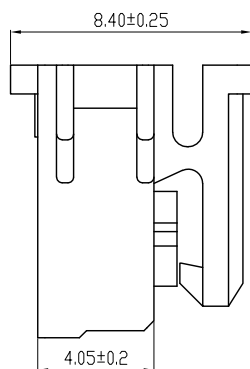


2孔

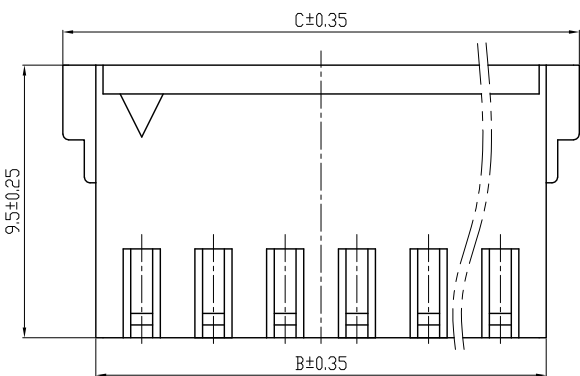

2孔以上

2孔

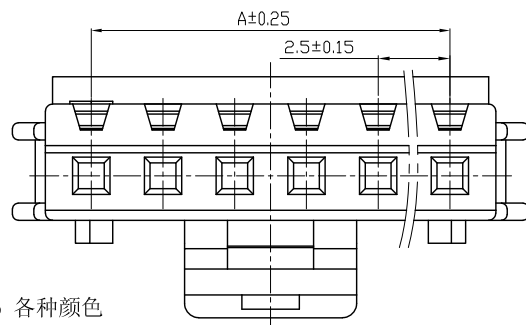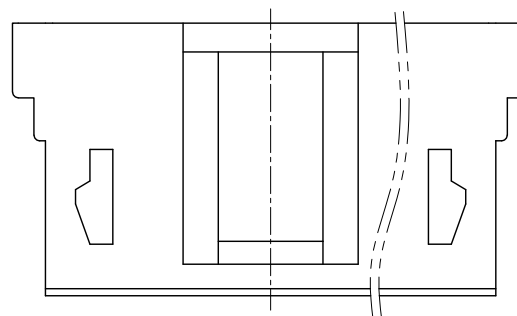

2孔

线数 Poles	产品规格 Part Model	产品名称 Name	料号 Part No	尺寸 Dimension		
				A	B	C
2	L250020-A02P-V*	XHD-2P	LX7V250*20-02	2.5	5.7	8.0
3	L250020-A03P-V*	XHD-3P	LX7V250*20-03	5.0	8.2	10.5
4	L250020-A04P-V*	XHD-4P	LX7V250*20-04	7.5	10.7	13.0
5	L250020-A05P-V*	XHD-5P	LX7V250*20-05	10.0	13.2	15.5
6	L250020-A06P-V*	XHD-6P	LX7V250*20-06	12.5	15.7	18.0
7	L250020-A07P-V*	XHD-7P	LX7V250*20-07	15.0	18.2	20.5
8	L250020-A08P-V*	XHD-8P	LX7V250*20-08	17.5	20.7	23.0
9	L250020-A09P-V*	XHD-9P	LX7V250*20-09	20.0	23.2	25.5
10	L250020-A10P-V*	XHD-10P	LX7V250*20-10	22.5	25.7	28.0
11	L250020-A11P-V*	XHD-11P	LX7V250*20-11	25.0	28.2	30.5
12	L250020-A12P-V*	XHD-12P	LX7V250*20-12	27.5	30.7	33.0

备注 NOTES:

- 材质 :PA66 各种颜色
Material: PA66 diverse colors
- 额定电压 :250V AC, DC
Voltage rating:250V AC, DC
- 绝缘电阻 : ≥1000MΩ
Insulation resistance: ≥1000MΩ
- 耐压 : 1000V
Withstanding voltage:1000V
- 适配端子 :XH-PT
Matched Terminal:XH-PT
- 适配针座:XH系列针座
Matched Wafer: XH series needle holder
- 适用温度范围: -25℃~+85℃
Applicable Temperature Range: -25℃~+85℃
- 环保要求: RoHS/REACH
Environmental requirements:RoHS/REACH

未注公差范围 No tolerance range is noted		温州市林鑫电子有限公司 WenZhou LinXin Electronics Co.,Ltd.	
.***	±0.05 ±0.5°		
.**	±0.15 ±1°		
.*	±0.20 ±2°		
.	±0.30 ±3°		
制图 DRAWING	邓小芳	产品规格: PART MODEL:	L250020-ANP-V*
审核 AUDIT	吴晓平	产品名称: PRODUCT NAME:	XHD-NP
批准 APPD	赵成钢	产品料号: PART NO:	LX7V250*20-***
		客户料号: CUSTOMER P/N:	
		发行日期 Release date:	
		UNITS	SCALE
		mm	1:1
		SHEET	1/1
		REV	A/1