

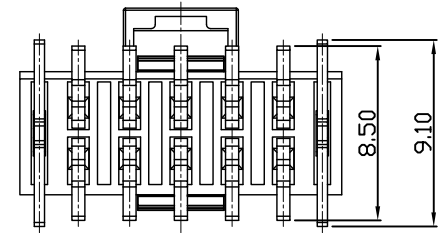

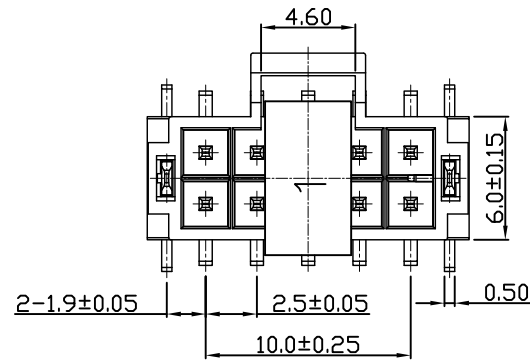


设计变更 REVISIONS

NO.	MARK	变更记录 DESCRIPTION	REV	DATE

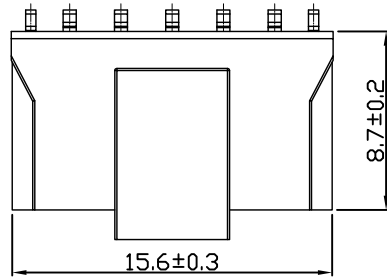

备注 NOTES:

1. 材质 Material: 塑壳:LCP 黑色, 铜针: 黄铜H65 表面镀锡;
Molded case LCP Black,
Copper needle: brass H65 The surface of the tin plating
2. 额定电流 Current rating: 4.0A AC, DC
3. 额定电压 Voltage rating: 250V AC, DC
4. 接触电阻 Contact Resistance: $\leq 10\text{m}\Omega$ 初始 (Initial)
5. 绝缘电阻 Insulation resistance: $\geq 10000\text{M}\Omega$
6. 耐压 Withstanding voltage: 1500V.AC
7. 适用温度范围 Applicable Temperature Range : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
8. 铜针与塑胶保持力 Copper needle and plastic holding force: $\geq 10\text{N}$
9. 适用PC板厚度 Applicable PC board thickness: 1.6 mm

未注公差范围 No tolerance range is noted		
***	± 0.05	$\pm 0.5^{\circ}$
**	± 0.15	$\pm 1^{\circ}$
*	± 0.20	$\pm 2^{\circ}$
.	± 0.30	$\pm 3^{\circ}$

LX温州市林鑫电子有限公司
WenZhou LinXin Electronic Co.,Ltd

产品名称: PRODUCT NAME:	105429-1110
产品料号: PART NO:	LX5B250K24-10
客户料号: CUSTOMER P/N:	
发行日期: Release date:	



UNITS	SCALE	SHEET	REV
mm	1:1	1/1	A/0