




**CARVED
TEXTURE PANEL**

LAMARTY

Product Introduction



Dimensions:

1200mm*2400mm/3000mm

Thickness:

7mm (5mm Solid Wood+2mm Fire-rated Board)

19mm (5mm Solid wood+14mm Substrate Layer)

Wood Species



Walnut



Oak



Ash



Teak



Maple

Substrate



MDF



Birch Plywood



Multi-layer Solid Wood



Matching Edge Banding


Provided for all available textures.



Matching Touch-up Pens

Provided for seamless repairs.

Product Introduction

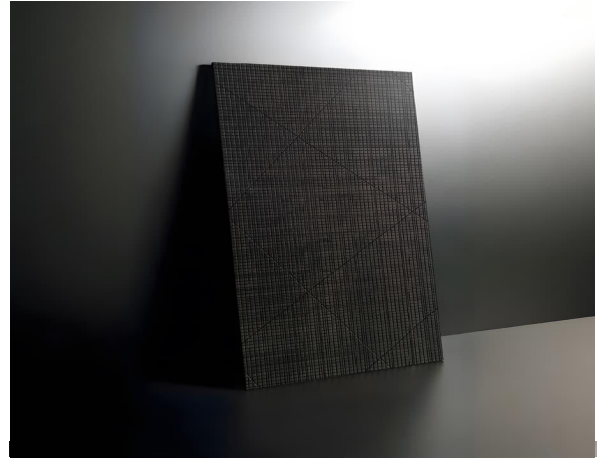


Crafted from solid wood, these panels undergo multiple precise processes including shaping, grooving, laser carving, polishing, and finishing with eco-friendly coatings. They feature unique, high-quality textures that impart a sense of depth and luxury to any interior space.

We use Sherwin-Williams coatings that meet stringent international environmental certifications and feature ultra-low VOC (Volatile Organic Compound) emissions, ensuring both aesthetic appeal and a healthy living environment.

Available in multiple finishes, sizes, and designs, these panels combine superior craftsmanship with exceptional durability, making them the ideal choice for creating striking and unique visual focal points in residential and commercial interiors.


Product Introduction

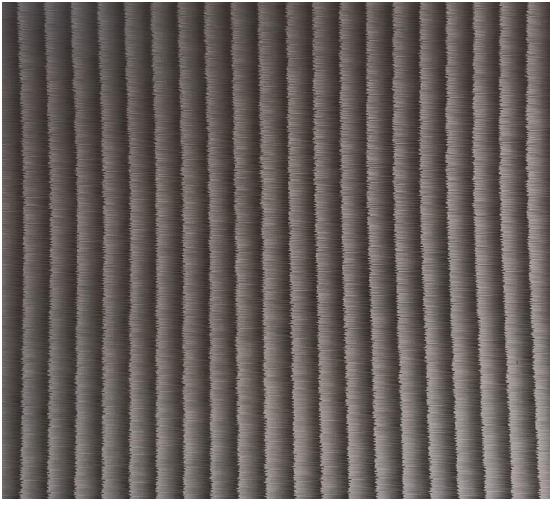

Dentate




Terrace

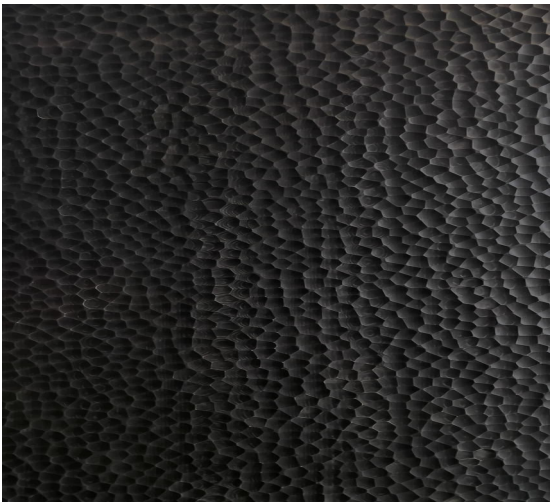


Hammered



Adzed

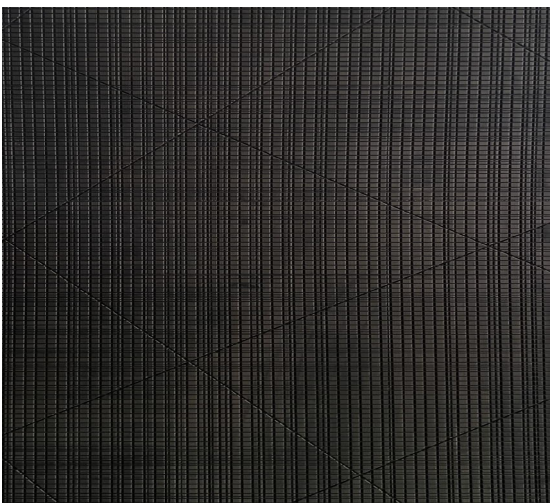


Saw

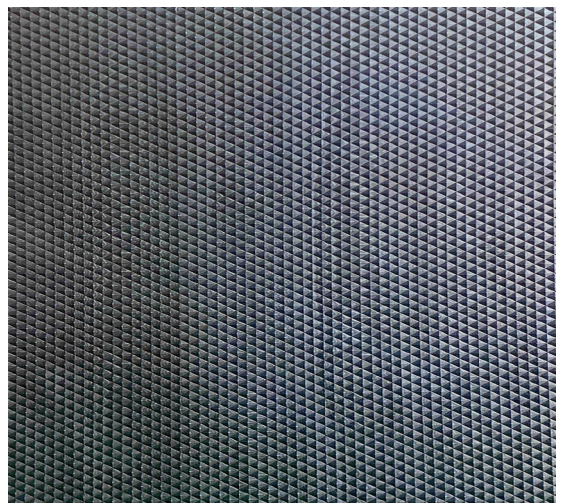


Drilled


Product Introduction

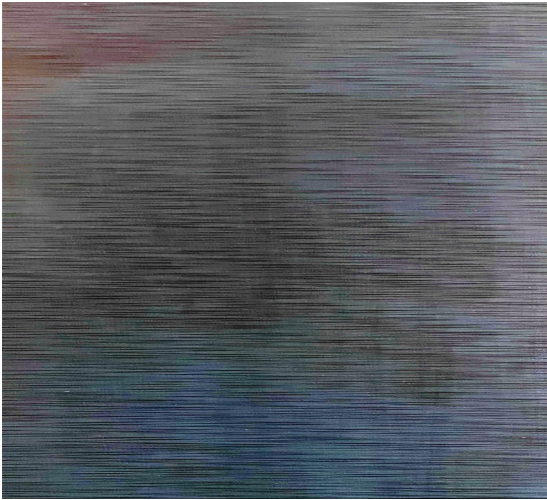


Rock

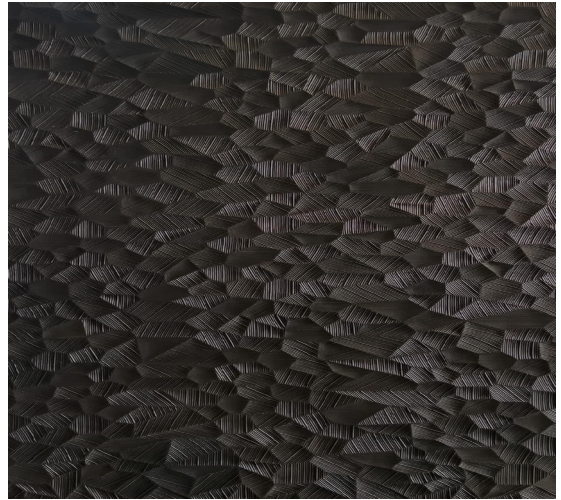


Ice-Cracked

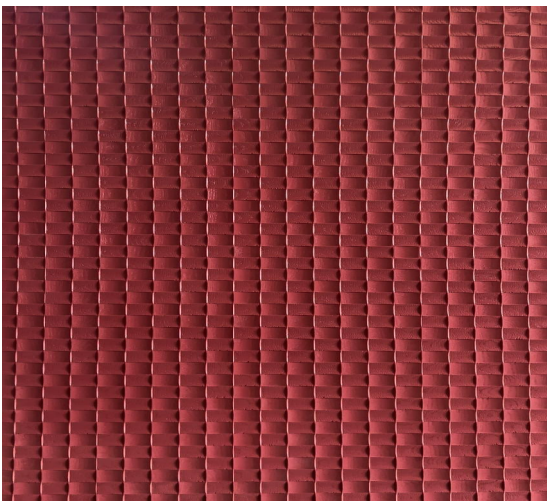

Bamboo Weave

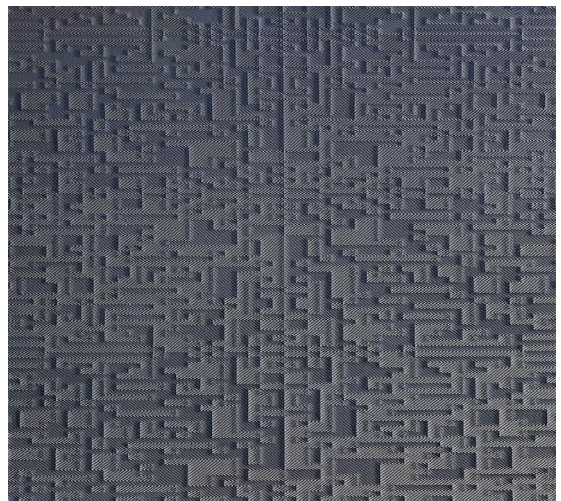

Cloud Scroll



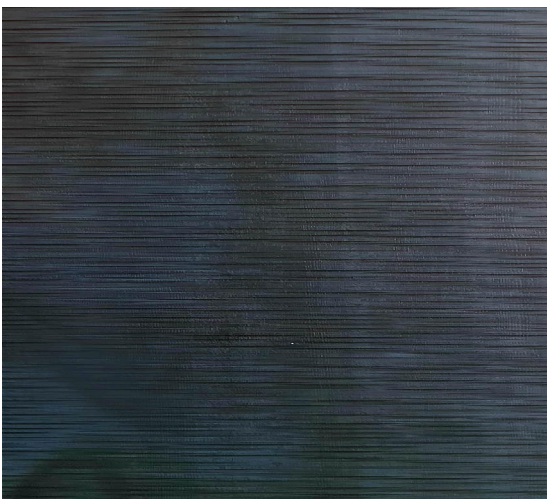


Striated



Stacked

Application Guide

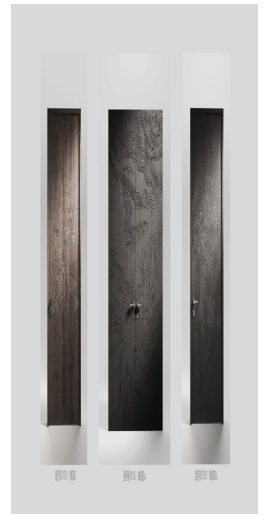

Wall Panel



Interior Doors



Furniture



Premium Flooring



Artistic Installations

Our textured panels are engineered for exceptional adaptability. They can be easily integrated with a variety of core substrates, such as Birch Plywood, Multi-layer Solid Wood, or MDF, to fulfill diverse design and functional requirements.

Ideal for a wide range of applications, these panels are perfect for: Wall Cladding & Feature Walls, Flooring, High-End Custom Furniture, Interior Doors & Partitions, Movable Furniture & Casegoods.

Product Introduction

Product Coating Process

We utilize professional coating technologies from Sherwin-Williams, a global leader in the paint and coatings industry. A dual-layer system is applied to ensure the long-lasting beauty and durability of the panels:

STEP 1: REINFORCED ADHESION PRIMER

Specifically designed for melamine surfaces to ensure a high-strength bond.

Zero Delamination: Solves adhesion issues and prevents peeling.

Enhanced Machinability: Improves workability while preserving original colors.

Strong Foundation: Ensures seamless integration with UV topcoats.

STEP 2: ANTI-YELLOWING & LOW-ODOR FINISH

Applied via precision roller coating for a refined texture.

Ultra-Flat Surface: Superior sanding for a mirror-like finish.

Color Retention: Excellent anti-yellowing for long-lasting vibrancy.

Eco-Friendly: Low-odor formula for a healthier environment.



**SHERWIN
WILLIAMS®**



*Sherwin-Williams (USA): A global coating giant ranking in the world's top three. With a 70%+ share of the US architectural market and an annual output exceeding 1 million tons, it represents the gold standard in professional coatings.

LAMARTY

Room 706, Building B, Twin Towers, No. 668 Xinzhuan Road, High-tech Park,
Songjiang District, Shanghai

+86 183 1718 7556

info@lamarty-cn.com

www.lamarty-cn.com