



## Specification

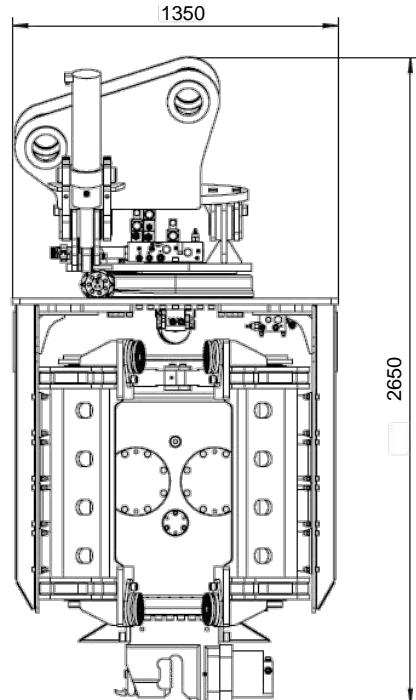

### AT-65B SPECIFICATION

|                                     |        |                |
|-------------------------------------|--------|----------------|
| Eccentric Moment                    | Kgm    | 6.5            |
| Centrifugal force                   | Kn     | 412            |
| Max. Centrifugal force              | Kn     | 644            |
| Frequency                           | Rpm    | 2400-3000      |
| Side clamp force                    | Kn     | 912            |
| Bottom clamp force                  | Kn     | 650            |
| Hydraulic system operation pressure | bar    | 350            |
| Rotate/tilt degree                  | degree | 360/+30        |
| Size                                | mm     | 1350*1490*2700 |
| Weight                              | Kg     | 3500           |
| Applicable excavator class          | Ton    | 32-40          |

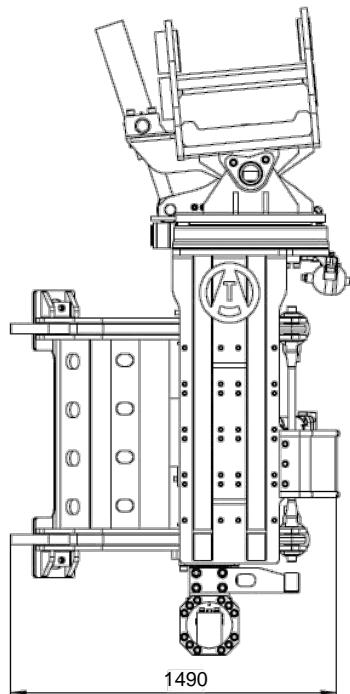

#### NOTE!

! Preliminary selection. When making the final selection excavator engine size and hydraulic system design (oil pump arrangement, oil flow rate/pressure etc) as well as soil and site conditions shall be taken into account.  
 ! Specifications are subject to change without notice.



**Construction pictures:**



\*application: available range of piles



**FEATURES:**

1. Full hydraulic flexible control, simple operation, 360 ° rotation, 30 ° tilt ,pick up pile easily
2. No need to modify excavator, install and use easily
3. Limited space is available
4. Available for a wide range of piles including sheet piles, H-piles, tubular steel piles, timber piles etc.
5. Precise ,safe, stable ,efficient, and economical, core components are

imported from famous brands

