



Specification

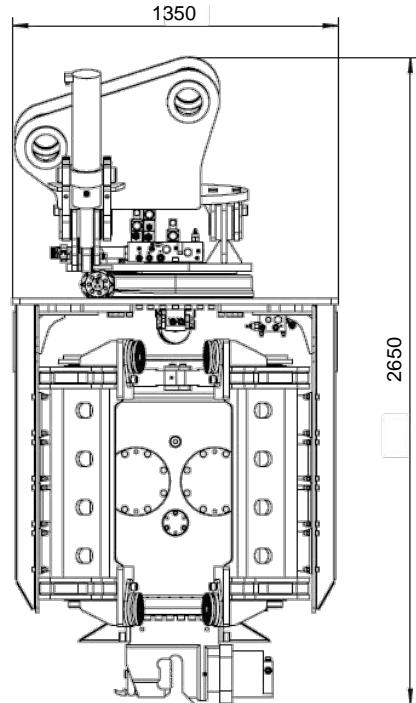

AT-75B SPECIFICATION

Eccentric Moment	Kgm	7.5
Centrifugal force	Kn	475
Max. Centrifugal force	Kn	743
Frequency	Rpm	2400-3000
Side clamp force	Kn	1116
Bottom clamp force	Kn	650
Hydraulic system operation pressure	bar	350
Rotate/tilt degree	degree	360/+30
Size	mm	1350*1490*2700
Weight	Kg	3800
Applicable excavator class	Ton	40-50

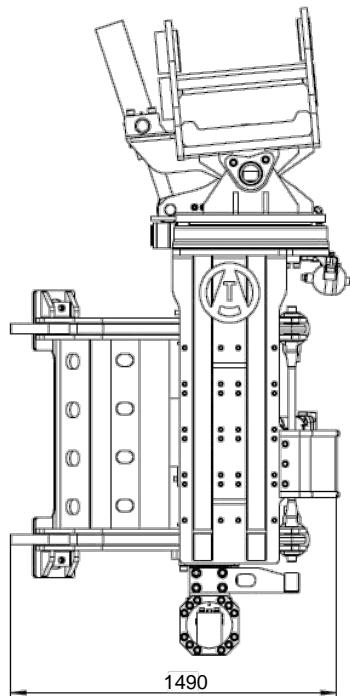

NOTE!

! Preliminary selection. When making the final selection excavator engine size and hydraulic system design (oil pump arrangement, oil flow rate/pressure etc) as well as soil and site conditions shall be taken into account.
 ! Specifications are subject to change without notice.



Construction pictures:



*application: available range of piles



FEATURES:



1. Full hydraulic flexible control, simple operation, 360 ° rotation, 30 ° tilt ,pick up pile easily
2. No need to modify excavator, install and use easily
3. Limited space is available
4. Available for a wide range of piles including sheet piles, H-piles, tubular steel piles, timber piles etc.
5. Precise ,safe, stable ,efficient, and economical, core components are imported from famous brands



E-Mail:sales@atvibro.com Web:www.atvibro.com

Add.:No168,QinghongRoad, EhuTown, XishanDistrict, Wuxicity, JiangSu Province, China