


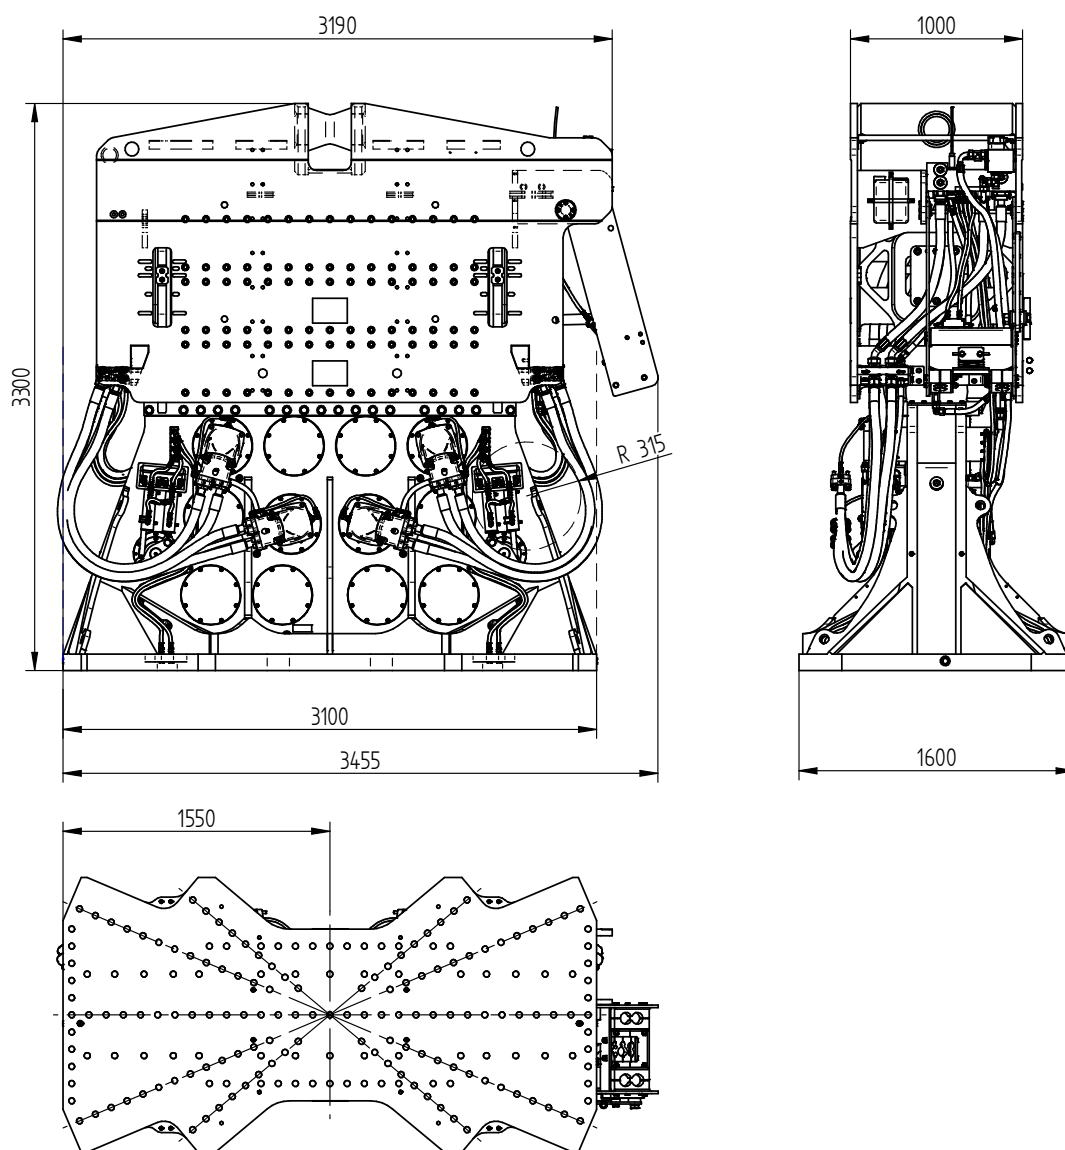


Specifications :

Eccentric moment	0-90 kgm
Max. centrifugal force	0-4477 kN
Max. frequency	2130 rpm
Max. amplitude excl. 4x150DC	13,3 mm
Max. amplitude incl. 4x150DC	9,1 mm
Max. static line-pull	1500 kN
Max. pull-down	400 kN
Max. operating pressure	350 bar
Max. oil flow	2062 l/min
Max. hydraulic power	1203/1636 kW/HP
Forced lubrication	yes
Dynamic weight excl. 4x150DC	13500 kg
Dynamic weight incl. 4x150DC	19900 kg
Total weight excl. 4x150DC and hoses	18500 kg

AT 90RF

Clamps:	
Four sided clamps	ATJ-150
Transport weight per piece	1300 kg
Double clamps	ATJ-350DC
Transport weight per piece	3600 kg
Powerpack:	
Model	1600P
Hose set:	
Length	60 m
Transport weight (±)	2630 kg

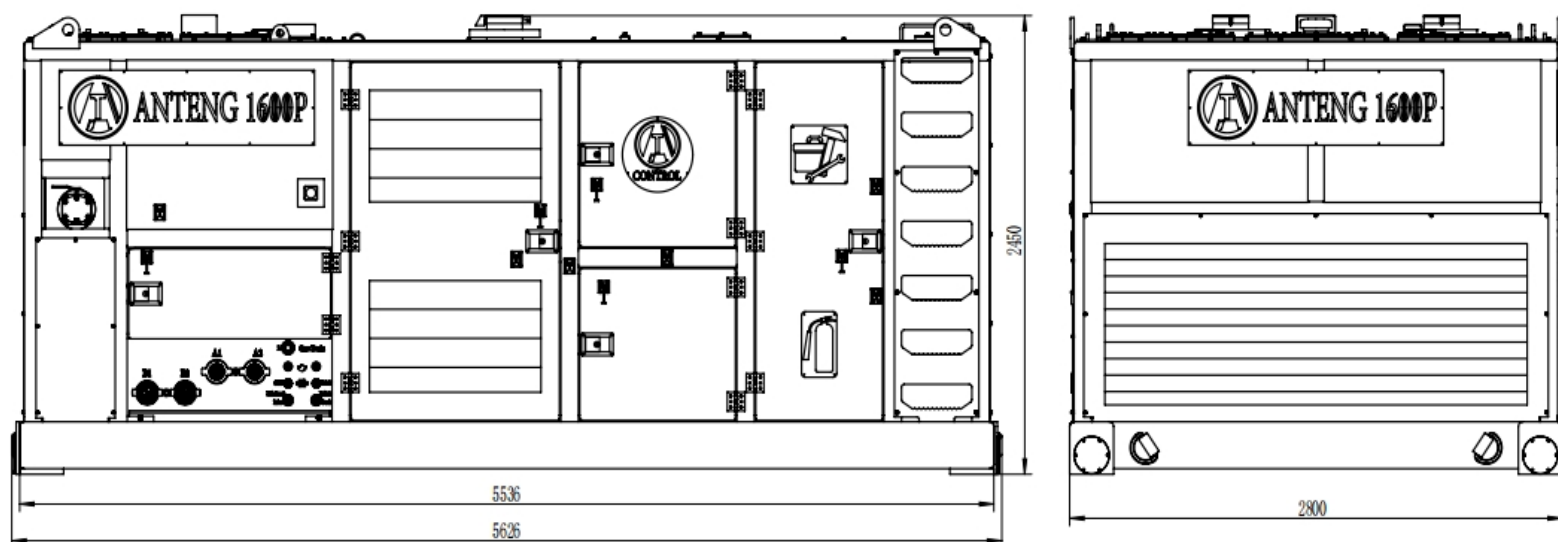

Specifications :

Engine Type	Cummins/Weichai		
Max. Power	2*670/2*911 KW/HP		
Max. frequency	1900 rpm		
Max. oil flow	1600 l/min		
Diesel Tank Capacity	1740 L		
Oil Tank Capacity	3770 L		
Working pressure	350 bar		
Weight	14000 kg		