


Specification

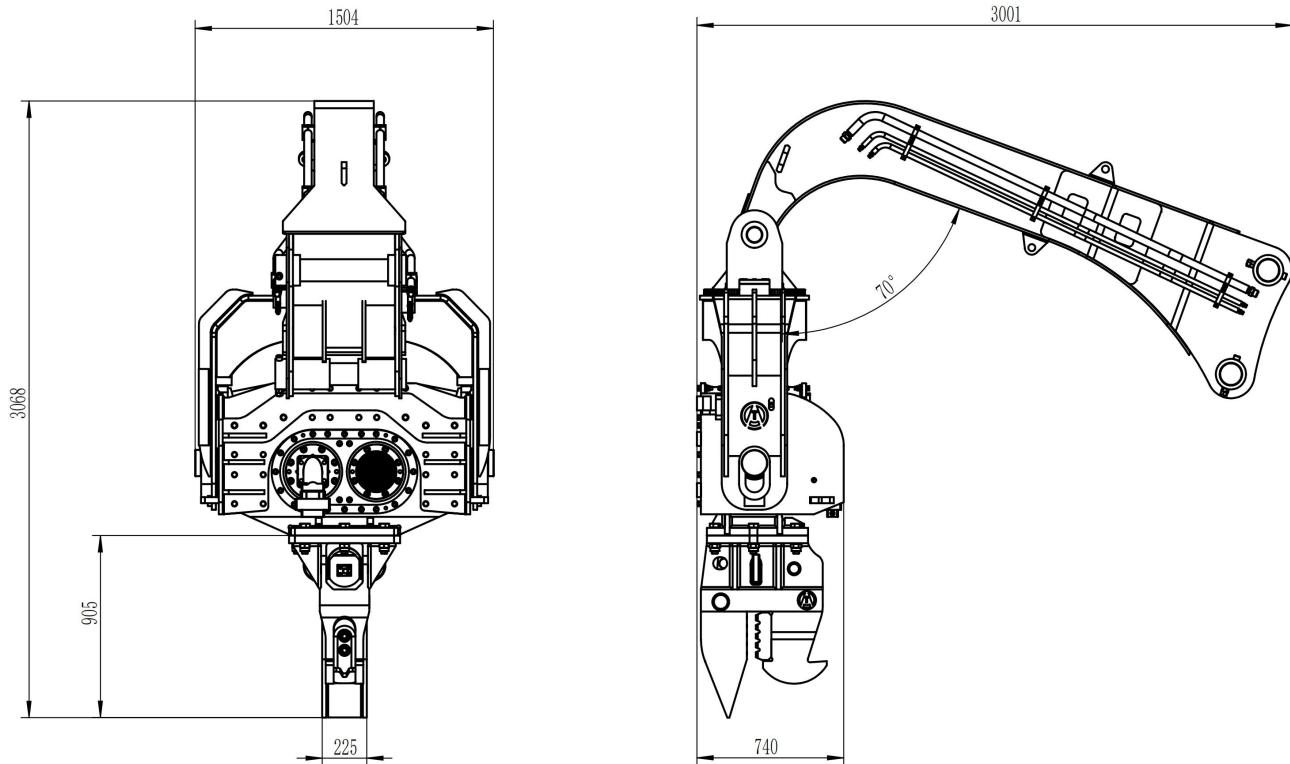

V300 SPECIFICATION

Eccentric Moment	Kgm	5.3
Max pressure	bar	320
Max. Centrifugal force	Kn	457
Frequency	Rpm	2800
Max oil flow	L/min	252
Weight (vibrator+clamp)	Kg	2620+550
L*W*H	mm	1300*740*2420
Vice arm (model/size/weight)	mm/kgs	A180/2000*620*1100/560
Excavator Weight	T	25-30


NOTE!

! Preliminary selection. When making the final selection excavator engine size and hydraulic system design (oil pump arrangement, oil flow rate/pressure etc) as well as soil and site conditions shall be taken into account.

! Specifications are subject to change without notice.



Construction pictures:



*application: available range of piles



V300 Application:



*V300 Designed to match the capabilities of middle excavators and to combine a robust structure with excellent pile handling characteristics.

* Fitted with clamps capable of driving a wide range of piles including sheet piles, H-piles, tubular steel piles and other pile sections.

