


## Specification



### V250 SPECIFICATION

Eccentric Moment	Kgm	4.8
Max pressure	bar	320
Max. Centrifugal force	Kn	414
Frequency	Rpm	2800
Max oil flow	L/min	176
Weight (vibrator+clamp)	Kg	1200+460
L*W*H	mm	1300*740*2420
Vice arm (model/size/weight)	mm/kgs	A180/2000*620*1100/560
Excavator Weight	T	20-25

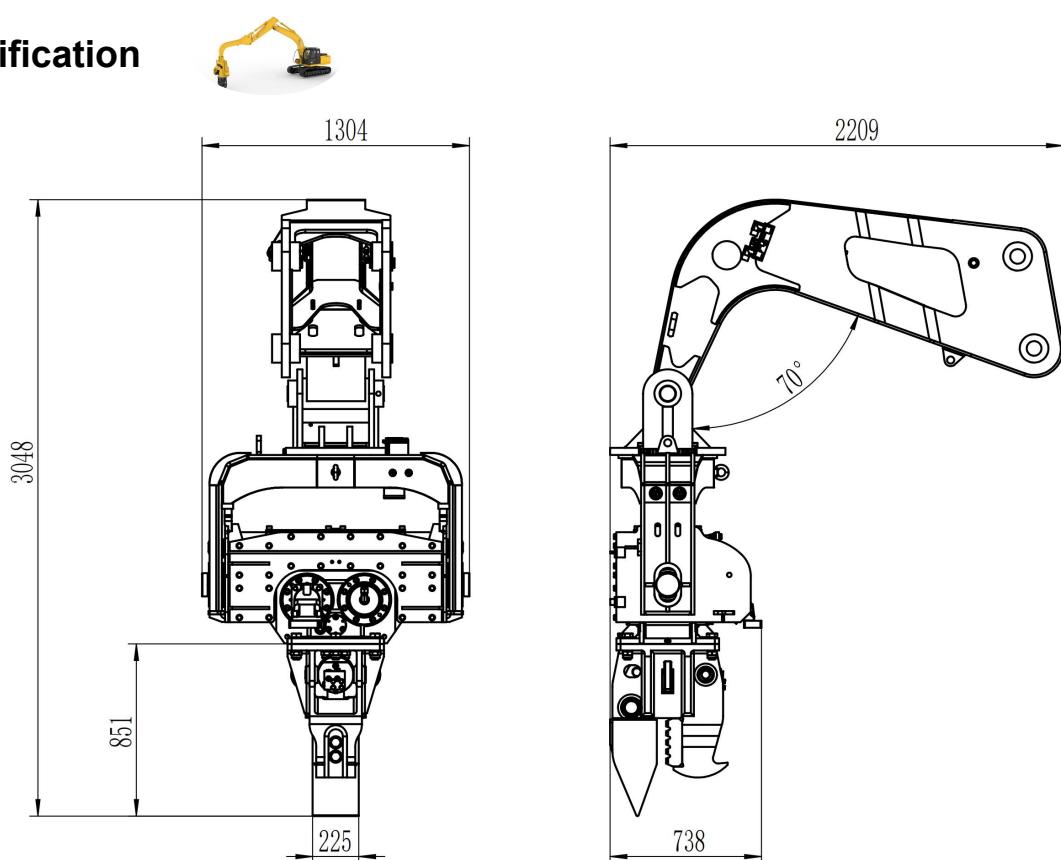

#### NOTE!

! Preliminary selection. When making the final selection excavator engine size and hydraulic system design (oil pump arrangement, oil flow rate/pressure etc) as well as soil and site conditions shall be taken into account.

! Specifications are subject to change without notice.



**Construction pictures:**



\*application: available range of piles



**V250 Application:**



\*V250 Designed to match the capabilities of middle excavators and to combine a robust structure with excellent pile handling characteristics.

\* Fitted with clamps capable of driving a wide range of piles including sheet piles, H-piles, tubular steel piles and other pile sections.

